

Laser spectroscopy of the $2S_{1/2} - 2P_{1/2}$, $2P_{3/2}$ transitions in stored and cooled relativistic C^{3+} ions

Daniel Winzen

University of Münster, Institute for Nuclear Physics

Volker Hannen (✉ hannen@uni-muenster.de)

University of Münster, Institute for Nuclear Physics

Michael Bussmann

Helmholtz Center Dresden-Rossendorf

Axel Buß

University of Münster, Institute for Nuclear Physics

Christian Egelkamp

University of Münster, Institute for Nuclear Physics

Lewin Eidam

Technical University of Darmstadt, Institute for Accelerator Science and Electromagnetic Fields

Zhongkui Huang

Chinese Academy of Sciences, Institute of Modern Physics

Daniel Kiefer

Technical University of Darmstadt, Institute for Applied Physics

Sebastian Klammes

Technical University of Darmstadt, Institute for Applied Physics

Thomas Kühl

GSI Helmholtz Center for Heavy Ion Research

Markus Loeser

Helmholtz Center Dresden-Rossendorf

Xinwen Ma

Chinese Academy of Sciences, Institute of Modern Physics

Wilfried Nörtershäuser

Technical University of Darmstadt, Institute for Nuclear Physics

Hans-Werner Ortjohann

University of Münster, Institute for Nuclear Physics

Rodolfo Sánchez

GSI Helmholtz Center for Heavy Ion Research

Mathias Siebold

Helmholtz Center Dresden-Rossendorf

Thomas Stöhlker

GSI Helmholtz Center for Heavy Ion Research

Johannes Ullmann

Helmholtz Institute Jena

Jonas Vollbrecht

University of Münster, Institute for Nuclear Physics

Thomas Walther

Technical University of Darmstadt, Institute for Applied Physics

Hanbing Wang

Chinese Academy of Sciences, Institute of Modern Physics

Christian Weinheimer

University of Münster, Institute for Nuclear Physics

Danyal Winters

GSI Helmholtz Center for Heavy Ion Research

Research Article

Keywords: Laser spectroscopy, Nuclear Physics, Electromagnetic Fields

Posted Date: December 17th, 2020

DOI: <https://doi.org/10.21203/rs.3.rs-117322/v1>

License:   This work is licensed under a Creative Commons Attribution 4.0 International License.

[Read Full License](#)

Laser spectroscopy of the ${}^2S_{1/2} - {}^2P_{1/2}$, ${}^2P_{3/2}$ transitions in stored and cooled relativistic C^{3+} ions

D. Winzen¹, V. Hannen^{1,*}, M. Bussmann², A. Buß¹, C. Egelkamp¹, L. Eidam³, Z. Huang⁴, D. Kiefer⁵, S. Klammes^{5,6}, Th. Kühl^{6,7,8}, M. Loeser², X. Ma⁴, W. Nörtershäuser⁹, H.-W. Ortjohann¹, R. Sánchez⁶, M. Siebold², Th. Stöhlker^{6,7,10}, J. Ullmann^{7,9,10}, J. Vollbrecht¹, Th. Walther⁵, H. Wang⁴, Ch. Weinheimer¹, and D.F.A. Winters⁶

¹University of Münster, Institute for Nuclear Physics, 48149 Münster, Germany

²Helmholtz Center Dresden-Rossendorf, 01328 Dresden, Germany

³Technical University of Darmstadt, Institute for Accelerator Science and Electromagnetic Fields, 64289 Darmstadt, Germany

⁴Chinese Academy of Sciences, Institute of Modern Physics, 730000 Lanzhou, China

⁵Technical University of Darmstadt, Institute for Applied Physics, 64289 Darmstadt, Germany

⁶GSI Helmholtz Center for Heavy Ion Research, 64291 Darmstadt, Germany

⁷Helmholtz Institute Jena, 07743 Jena, Germany

⁸University of Mainz, Institute of Physics, 55099 Mainz, Germany

⁹Technical University of Darmstadt, Institute for Nuclear Physics, 64289 Darmstadt, Germany

¹⁰University of Jena, Institute for Optics and Quantum Electronics, 07743 Jena, Germany

* e-mail of corresponding author: hannen@uni-muenster.de

ABSTRACT

The ${}^2S_{1/2} - {}^2P_{1/2}$ and ${}^2S_{1/2} - {}^2P_{3/2}$ transitions in Li-like carbon ions stored and cooled at a velocity of $\beta \approx 0.47$ in the Experimental Storage Ring (ESR) at the GSI Helmholtz Centre in Darmstadt have been investigated in a laser spectroscopy experiment. Resonance wavelengths have been obtained using a new continuous-wave UV laser system and a novel extreme UV (XUV) detection system used to detect forward emitted fluorescence photons. The results obtained for the two transitions are compared to existing experimental and theoretical data. A discrepancy found in an earlier laser spectroscopy measurement at the ESR with results from plasma spectroscopy and interferometry could be resolved and agreement between experiment and theory is confirmed. Nonetheless, the experimental uncertainty is still smaller than that of state-of-the-art theory.

1 Introduction

The possibilities for laser spectroscopy experiments at the upcoming FAIR facility require the development of experimental tools and techniques adapted to the relativistic ion energies offered by the new accelerators. In this regard a test beam-time with Li-like carbon ions at the Experimental Storage Ring (ESR) at the GSI Helmholtz Centre in Darmstadt provided the possibility to test new laser systems and a novel detection system for extreme UV (XUV) photons. The laser systems will be required for laser cooling of bunched relativistic ion beams, as it is being planned for the SIS100 synchrotron at FAIR^{1,2}. For that purpose, continuous-wave (cw) and pulsed laser systems have been developed by groups at the TU Darmstadt³ and the HZDR / TU Dresden⁴, respectively. For the detection of forward-emitted XUV fluorescence photons that are created in the de-excitation of highly charged ions at relativistic velocities, a detector system adapted to the large Lorentz boost and Doppler shift of these photons has been developed in Münster⁵. The design is optimized for wavelengths around 10 nm as emitted in a proposed ESR experiment studying the decay of the 3P_1 state in Be-like krypton ions⁶ but is sensitive over a wide wavelength region spanning from the UV to soft x-rays.

In the measurements described in this paper the ${}^2S_{1/2} - {}^2P_{1/2}$ and ${}^2S_{1/2} - {}^2P_{3/2}$ transitions in C^{3+} -ions have been investigated which are, besides their relevance for validation of theoretical atomic structure calculations (see e.g.⁷ or⁸), of high importance for the astrophysical community where they are used for diagnostics of hot plasmas in the

interstellar medium and stellar atmospheres⁹. The wavelengths of the two transitions have also been determined during a previous laser-cooling experiment at the ESR¹⁰, but were in conflict with earlier results from plasma spectroscopy¹¹ and from interferometric measurements⁹. In this new measurement special emphasis is therefore placed on a careful calibration of all experimental components and a thorough analysis of the systematic uncertainties.

2 Experimental setup

The measurements were performed with a beam of $^{12}\text{C}^{3+}$ -ions which were overlapped with an anti-collinear laser beam in one of the straight sections of the ESR to excite either the $^2\text{S}_{1/2} - ^2\text{P}_{1/2}$ or the $^2\text{S}_{1/2} - ^2\text{P}_{3/2}$ transition (see figure 1). For this purpose two laser systems were available: a pulsed laser system from HZDR/TU-Dresden⁴ and a

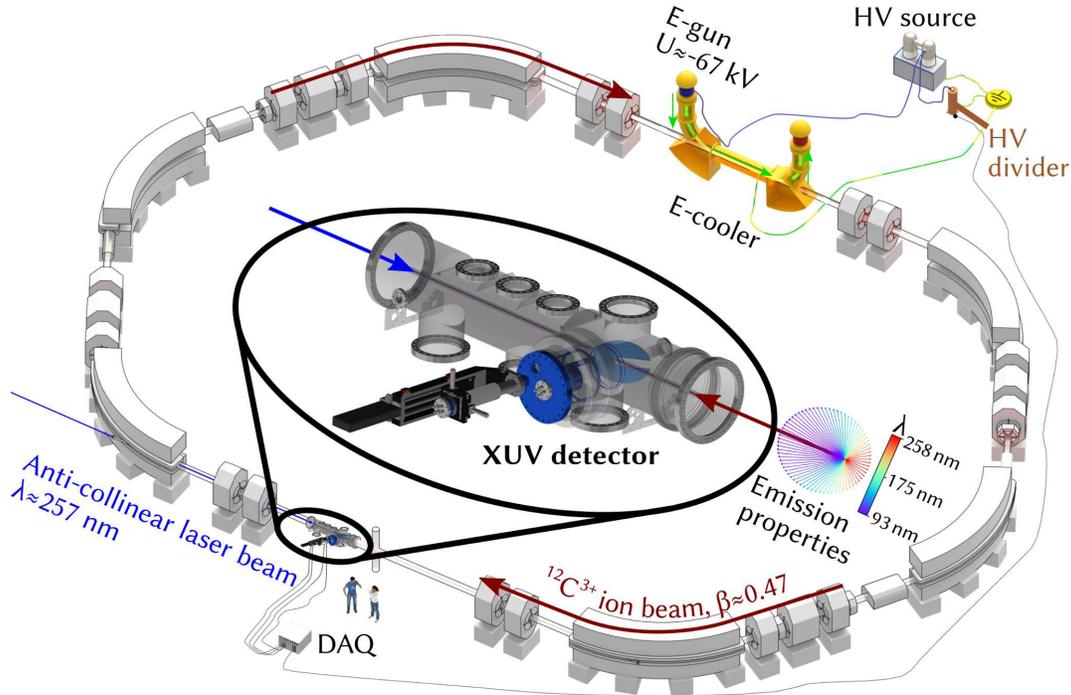


Figure 1. Schematic view of the ESR with an enlarged view of the optical detection region. The ion beam is circling clockwise in the ring while the laser beam is counterpropagating the ions inside the straight section of the ESR (figure adapted from¹²).

continuous-wave laser system from TU-Darmstadt³, both with a wavelength of $\lambda_{\text{lab}} \approx 257 \text{ nm}$. According to the equation for the relativistic Doppler shift

$$\lambda_0 = \lambda_{\text{lab}} \cdot \gamma(1 + \beta \cos \theta), \quad (1)$$

with the ion velocity $\beta \approx 0.47$, the Lorentz-factor $\gamma = 1/\sqrt{1 - \beta^2}$ and an angle between laser and ion beam of $\theta \approx 180^\circ$, the laser photons are blue-shifted to wavelengths around $\lambda_0 \approx 155 \text{ nm}$ in the rest frame of the ions. In order to obtain a well-determined absolute ion energy ($E_{\text{kin}} = 122 \text{ MeV/u}$) and a small relative momentum spread ($dp/p \approx 1 \cdot 10^{-5}$), the ion beam was cooled by the ESR electron cooler¹³. Following the principle of electron cooling, the precise velocity of the ions is determined by the acceleration voltage of the electron beam inside the cooler. Scans across the two transitions of interest were realized by varying the electron cooler voltage, thus changing the velocity of the ions stored inside the ESR and thereby the Doppler-shifted laser wavelength in the rest frame of the ions. The dependence of the ion velocity on the effective electron cooler voltage U_{ecool} is given by

$$\beta_{\text{ion}} = \sqrt{1 - \left(1 - \frac{e \cdot U_{\text{ecool}}}{m_e \cdot c^2}\right)^{-2}}, \quad (2)$$

where e and m_e are the elementary charge and electron mass, respectively. The acceleration voltage of the electron cooler was provided by a Heinziger HNC 320.000-10 power supply and set on a terminal in the main control room of the storage ring. Monitoring of the actual voltage present at the cooler was achieved using a Julie Research JRL HVA-100 high-precision voltage divider connected to a 6.5 digit Keysight 34465A digital voltmeter (DVM). Fluorescence photons, which are emitted when the resonance condition for one of the two transitions is met, were detected by the new XUV detection system located in the region of overlap between the laser and the ion beam. Due to the Lorentz boost, the fluorescence photons are mainly emitted in the forward direction with the photon wavelengths being Doppler shifted down to $\lambda_{\text{flu0}}(0^\circ) \approx 93$ nm (see inlay in figure 1).

CW Laser system The measurements discussed in the following sections were performed using the continuous-wave (CW) laser system originally developed in the scope of a PhD thesis^{3,14} and further developed as reported in^{15,16}. The setup is divided into five main components (see figure 2). A diode laser with an external resonator

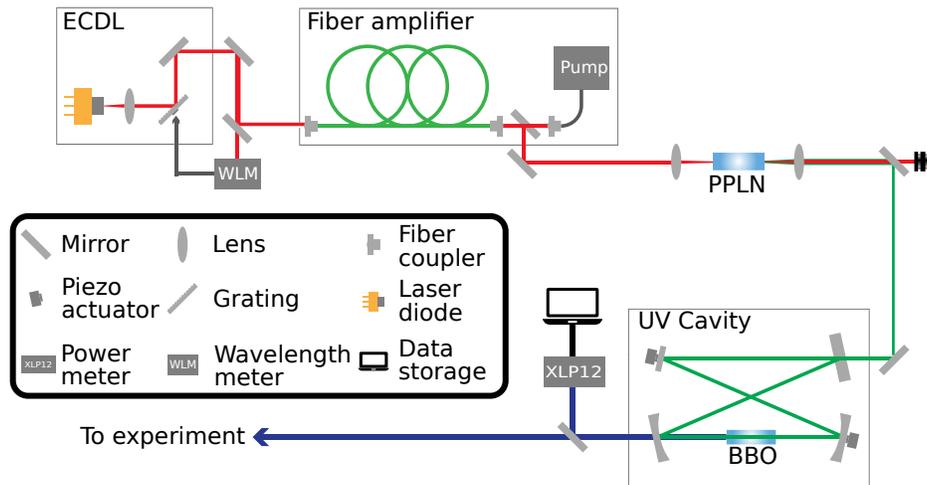


Figure 2. Schematic view of the continuous-wave laser system.

(external cavity diode laser, ECDL) serves as master oscillator operating at 1028 nm. The ECDL setup of Littrow design features a blazed grating that can be tilted via a piezoelectric actuator so that the output frequency of the laser system is tunable. The laser light from the ECDL is then amplified in an Ytterbium-doped fiber-amplifier system. Subsequently, the amplified light is frequency-doubled twice. The first frequency doubling is achieved by guiding the light in a single pass arrangement through a magnesium-doped periodically-poled lithium-niobate (MgO:PPLN) crystal. From there, the emerging green light of approximately 514 nm is guided into the UV cavity, where it is again frequency-doubled with a β -barium borate (BBO) crystal. The resulting beam with ≈ 257 nm wavelength is then transported to the overlap region of laser and ion beams. In order to measure the output power during the beam-time, a fraction of the laser light was diverted by a beam splitter at the output of the UV cavity. As seen in figure 2, it was measured by a Gentec-EO power detector model XLP12-1S-H2-D0 and the data was stored on a local laptop. To stabilize the laser frequency, a small fraction of the beam from the ECDL was coupled into a single-mode fiber and guided to a wavelength meter (WLM) from HighFinesse, type WS7-60. In a feedback loop deviations from the desired laser frequency measured by the device were then used to actuate the blazed grating, counteracting the fluctuation.

XUV detection system For an effective detection of forward emitted XUV photons in the ESR a novel detection system has been developed based on the idea of detecting secondary electrons produced by the incoming photons from a suitable cathode material^{17,18}. The detector consists of a movable cathode plate that can be driven into the beam line via a pressured air motor. In order not to interfere with the ion beam, the plate has a central 30 mm wide slit. XUV photons hitting the cathode will produce mostly low energetic (typically a few eV) secondary electrons that will be guided electromagnetically onto a microchannel plate (RoentDek DET40 MCP) which is mounted inside

the vacuum. A similar detection system for optical photons, making use of a movable parabolic copper mirror and a photomultiplier outside the vacuum¹⁹, has already successfully been applied in a measurement of the hyperfine structure splitting in H-like and Li-like bismuth^{12,20}.

Figure 3, left panel, shows a schematic view of the setup as it was implemented for simulations using the software package SIMION 8.1²¹. The cathode is coated with a 300 nm thick layer of caesium iodide (see figure 3, right panel),

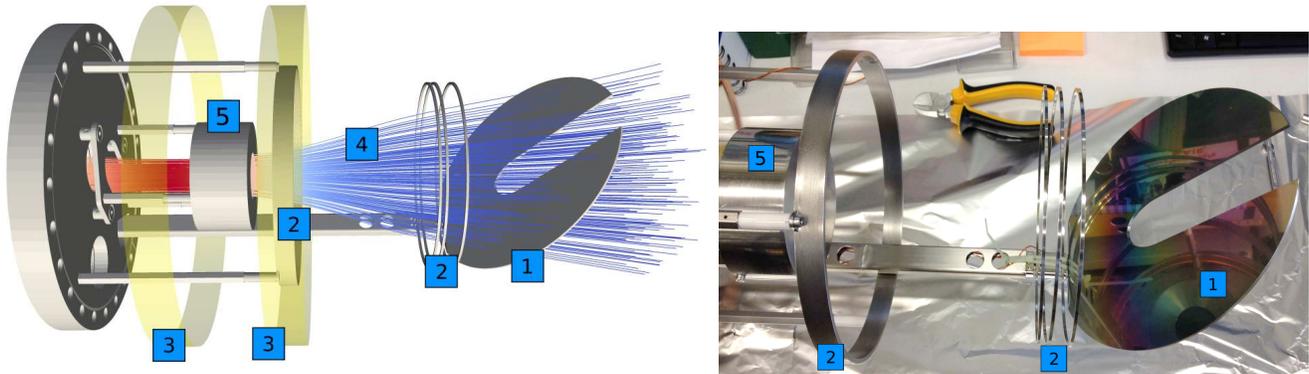


Figure 3. Left: schematic view of the XUV detection system with movable cathode (1), electrodes (2), magnet coils (3), magnetic field lines (4) and MCP (5). Right: cathode plate with 300 nm CsI coating.

vacuum evaporated onto the cathode surface in the target laboratory at GSI, to enhance the secondary electron yield at the wavelengths of interest²². A magnetic field, produced by solenoid coils mounted outside the vacuum, is used to guide the electrons to the MCP. The simulations resulted in an optimum configuration with one solenoid coil providing the main guiding field whereas a second solenoid coil closer to the cathode is operated with a significantly smaller current in opposite direction, widening the magnetic field lines to cover the complete cathode plate (see blue field lines in figure 3, left panel).

Figure 4 shows the interconnections of the detection system with the voltage supplies of the electrodes, the current supplies for the two solenoid coils and the front-end electronics for readout of the MCP. The high voltage for the

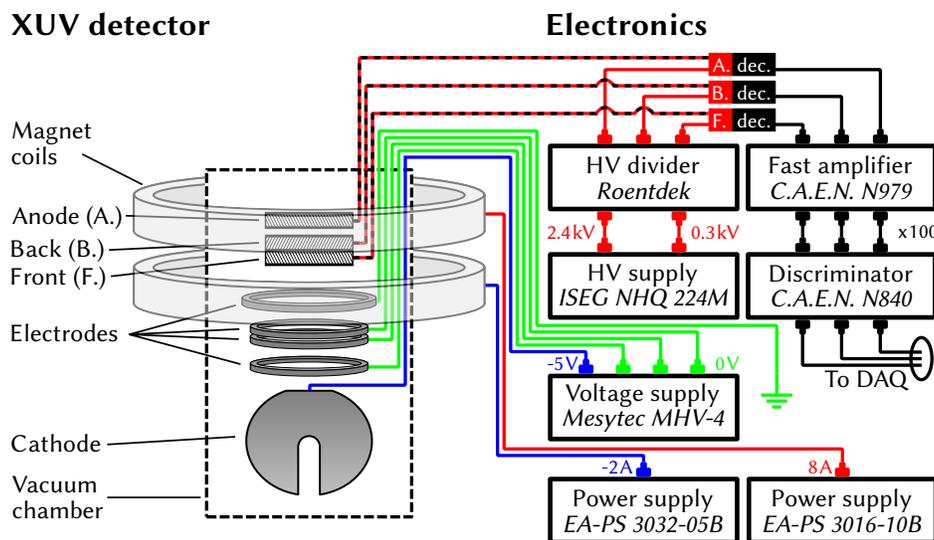


Figure 4. Interconnections of the XUV detection system with power supplies and front-end electronics of the data acquisition system.

channelplates is generated using an ISEG NHQ 224M HV supply. Charge pulses created in the MCP front and back plate and in the MCP anode are capacitively decoupled from the high voltage lines and amplified using a

CAEN N979 fast amplifier. After converting the analog pulses to logical NIM signals using a CAEN N840 Constant Fraction Discriminator the latter are recorded using a GSI VUPROM (VME Universal Processing Module) module²³ serving both as a multi-hit TDC and a scaler module.

3 Calibration and systematic uncertainties

The experimental setup contains a number of systems which have to be calibrated carefully in order to reduce their contributions to the systematic uncertainties of the reconstructed transition wavelengths. A short overview of the most important calibration procedures is given in the following.

HV divider scale factor The uncertainty of the scale factor of the JRL HVA-100 high voltage divider used to monitor the electron cooler voltage is one of the main systematic uncertainties in the transition wavelength analysis presented in section 4. For the HVA-100 divider, we have three sets of calibration data obtained with different reference dividers in 2013²⁴, 2014²⁵ and 2017²⁶ at voltages similar to the -67 kV applied during the beam-time. Applying a linear fit to the scale factor as function of time, a scale factor for the measurement period in 2016 is extracted:

$$M_{HVA-100}(-67\text{kV}, 2016) = 9999.698(155). \quad (3)$$

The relatively large uncertainty of 16 ppm is mainly due to missing temperature monitoring of the divider during the 2016 beam-time (the divider exhibits a dependence of the scale factor on the environmental temperature of $-2.75(25)$ ppm/K²⁶).

DVM gain calibration A calibration of the Keysight 34465A DVM has been performed in advance of the beam-time to determine a possible offset and gain factor of the device. The offset was found to be 0.000000(20) V. The gain is determined utilizing a Fluke 732B reference source which provides an output voltage of 10.000076(50) V and was measured to be

$$G_{\text{DVM}} = \frac{10.000076(50)\text{ V}}{U_{\text{DVM}} - 0.000000(20)\text{ V}} = 1.0000006(131)\text{ V}, \quad (4)$$

where U_{DVM} is the voltage value read from the DVM.

Voltage dependence on cooler current The cooler voltage, as measured by the DVM, exhibits a small dependence on the cooler current. This dependence has been measured at the two central cooler voltages used in the beamtime over a range from 0 mA to 250 mA cooler current. Up to a cooler current of 122 mA we observe a linear drop in the measured DVM voltages by $-0.6 \mu\text{V}/\text{mA}$ after which it saturates at a value of $\approx -73 \mu\text{V}$. This correction is used when reconstructing missing DVM measurements at different cooler currents.

Set voltage calibration Due to problems with the readout software of the Keysight voltmeter, the measured electron cooler voltages were not written to storage for larger parts of the beam-time. This especially concerns data taken for the $^2\text{S}_{1/2} - ^2\text{P}_{1/2}$ transition. For these parts of the data, we have to reconstruct the DVM measurements from the cooler voltage set values U_{set} . To do so, we use periods of the beam-time where both DVM data and control room set voltages are available to develop a suitable conversion formula. As these data were collected at different electron cooler currents we calculate the corresponding DVM values at zero cooler current $U_{\text{DVM},0\text{mA}}$ by applying the correction explained in the previous paragraph.

Besides a small offset of the set voltage and a scale factor, the formula has to take into account the finite 18 bit resolution with which the set voltages were transferred to the Heinziger power supply of the electron cooler. The maximum output voltage of the supply is 320 kV so the least significant bit of the digital set voltage corresponds to $\Delta U = 320\text{kV}/2^{18} = 1.220703\text{ V}$. With this the conversion formula was found to be

$$U_{\text{DVM},0\text{mA},\text{recon.}} = \text{floor} \left(\frac{U_{\text{set}} + 0.38\text{ V}}{\Delta U} \right) \cdot \frac{\Delta U}{10005.6699} \quad (5)$$

where the `floor` function returns the integer part of its operand. The relative deviation of measured DVM voltages $U_{\text{DVM},0\text{mA}}$ and reconstructed values $U_{\text{DVM},0\text{mA},\text{recon.}}$ stays below 10 ppm for all available datapoints.

Electron cooler workfunction The work function W of a material has a direct impact on the electrostatic potential ϕ produced in the vacuum when a voltage U is applied to the material: $\phi = U - W/e$. Electrons in the ESR electron cooler are generated in the dispenser cathode of an electron gun. It consists of a tungsten filament coated with barium, having a nominal work function of $W_{\text{T,Ba}} \approx 1.66 \text{ eV}^{27}$. The beampipe of the electron cooler, where the ion beam is superimposed with the electron beam, consists of stainless steel with a nominal work function of $W_{\text{steel}} \approx 4.5 \text{ eV}^{28}$. Work functions are typically determined under ideal conditions with ultrapure surfaces. Work functions encountered under standard conditions can, therefore, deviate by up to $\approx 1 \text{ eV}$ from the literature values²⁹. The acceleration voltage felt by the electrons inside the cooler is determined by the difference of the electrode potentials of cathode and beampipe $\Delta\phi$ given by

$$\begin{aligned} \Delta\phi &= \phi_{\text{cath}} - \phi_{\text{pipe}} = \left(U_{\text{cath}} - \frac{W_{\text{T,Ba}}}{e} \right) - \left(U_{\text{pipe}} - \frac{W_{\text{steel}}}{e} \right) = (U_{\text{cath}} - U_{\text{pipe}}) - \left(\frac{W_{\text{T,Ba}}}{e} - \frac{W_{\text{steel}}}{e} \right) \\ &= U_{\text{HNC}} + 2.84(142) \text{ V} \end{aligned} \quad (6)$$

where the difference between the cathode voltage U_{cath} and the beampipe voltage U_{pipe} is the voltage U_{HNC} applied to the electron cooler using the Heinzinger power supply.

In conclusion, the potential of the electron cooler is shifted by $+2.84(142) \text{ V}$, effectively lowering the electron energies. Considering an electron cooler voltage of approximately -67 kV , the uncertainty of the work function difference on this voltage amounts to 21 ppm, representing one of the major contributions to the error budget.

Space charge corrections Electron and ion space charges, present in the overlap region of both beams inside the electron cooler, modify the electric potential that accelerates the electron beam and therefore impact the velocity of the cooled ions. While the effect of the electron space charges can be measured (see section 4), the potential change due to the ion current has been estimated from the beam parameters and the drift tube geometry to be $\Delta\phi_{\text{ion}} \approx -0.5 \text{ V/mA}^{31}$. To assess the effect of the ion space charge, the analysis has been performed with and without the correction resulting in a $\approx 0.3 \text{ ppm}$ change in the extracted wavelength which was then used as a conservative estimate of the related systematic uncertainty.

Laser wavelength Two different wavelength meters were used to determine and stabilize the frequency of the CW-laser. 1) A HighFinesse WS6-200 wavelength meter, calibrated to a HeNe-laser, was used to measure the absolute frequency of the ECDL driving the system before and after the experiment. 2) A HighFinesse WS7-60 wavelength meter was utilized for a continuous stabilization of the laser frequency. Both wavelength meters operate in a range of 330 nm to 1180 nm and mainly differ in terms of accuracy. The WS6-200 has an uncertainty of 67 MHz and the WS7-60 has an uncertainty of 20 MHz. The measurement of the ECDL frequency with the calibrated WS6-200 amounted to $f_{\text{laser}} = 291.43340(7) \text{ THz}$. The frequency is quadrupled in a two-step process and thus, the resulting laser wavelength is given by $\lambda_{\text{laser}} = c/(4 \cdot f_{\text{laser}}) = 257.170642(62) \text{ nm}$.

Angle between laser and ion beam An additional uncertainty arises from the unknown angle θ between laser and ion beam. The effective laser wavelength in the ions rest frame directly depends on this angle according to equation 1. The position of the ion beam in the vacuum beam-pipe of the ESR can be determined using two sets (horizontal and vertical) of position-calibrated ‘‘scrapers’’ inside the vacuum, which are a length $l = 6.33 \text{ m}$ apart. These scrapers are simple metal plates which can be moved with sub-millimetre precision, blocking part of the ion beam. By moving them from the outside towards the center of the beam-pipe, the radius and the central position of the beam can be determined. The same scrapers are also used to measure the position of the laser beam. The centre points of laser and ion beam - at the positions of the scrapers - were at maximum a distance $d = 2 \text{ mm}$ apart. The misalignment angle between laser and ion beam is therefore estimated to be $\Delta\theta_{\text{max}} = \arctan(2 \cdot d/l) = 0.036^\circ$ causing a corresponding uncertainty in the transition wavelengths of 0.000027 nm for both transitions.

4 Resonance analysis

The following sections provide an overview of the experimental procedure during the beamtime and the extraction of the resonance wavelengths for the $^2\text{S}_{1/2} - ^2\text{P}_{1/2}$ and $^2\text{S}_{1/2} - ^2\text{P}_{3/2}$ transitions.

Experimental background There are two major sources of experimental background for the fluorescence detection system. One is laser stray light creating photoelectrons from the cathode plate which are guided to the MCP. This leads to a constant background whose magnitude depends on the position of the cathode plate inside the beam line. The second background is caused by the ion beam ionizing or exciting residual gas molecules inside the beam pipe, which can lead to electrons or photo-electrons, respectively, finally hitting the MCP. The magnitude of this background component is proportional to the ion beam current. During initial tests of the detector in this beam-time, it was found that the detector cannot be used with the cathode plate positioned around the ion beam in the center of the beam pipe due to excessive background rates that saturated the MCP. Therefore, the cathode was positioned at a distance of ≈ 10 cm from the ion beam. The resulting background contributions were then found to be $b_{\text{ion}} = 146$ kcps/mA from the ion beam and $b_{\text{laser}} = 0.11$ kcps/mW from the laser system³¹.

Voltage scans To determine the exact wavelengths of the $^2S_{1/2} - ^2P_{1/2}$ and $^2S_{1/2} - ^2P_{3/2}$ transitions, scans of the electron cooler voltage were performed thus changing the velocity of the stored ions inside the ESR and thereby the Doppler-shifted laser wavelength in the rest frame of the ions. Fluorescence photons which were created when the resonance condition for either of the two transitions was met, were detected and recorded by the data acquisition system. Figure 5 shows on the left panel the raw MCP rates R_{MCP} (blue curve) recorded while scanning the cooler voltage (red curve) in 1 V steps three times over the $^2S_{1/2} - ^2P_{3/2}$ resonance. The maximum rates, corresponding to

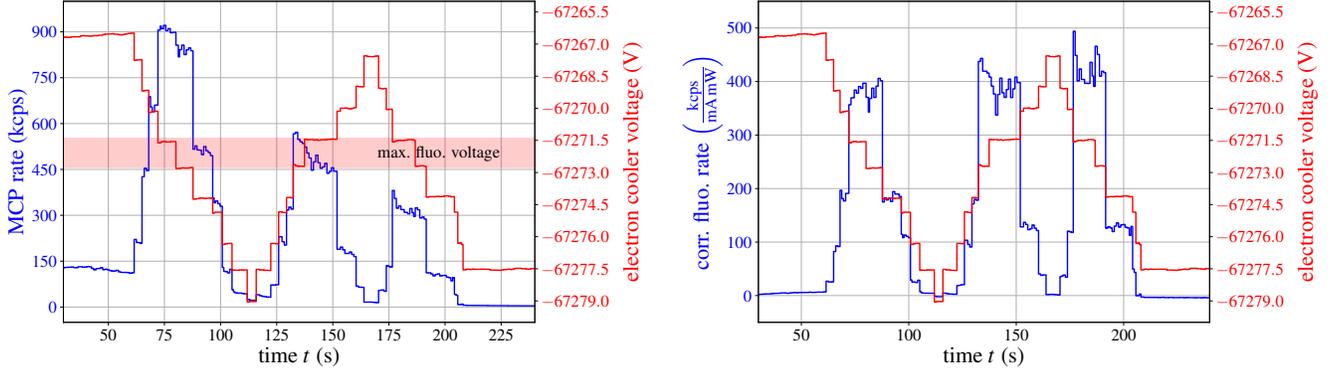


Figure 5. Left: raw detector rates (blue curve) for a scan of the electron cooler voltage (red curve) over the resonance region of the $^2S_{1/2} - ^2P_{3/2}$ transition. Right: fluorescence rates of the same voltage scan after background subtraction, normalization to ion current and laser power and MCP gain correction.

the resonance condition being fulfilled, occur for a cooler voltage of approximately -67272 V. To extract the exact resonance voltage, the experimental background is subtracted from the data which are subsequently normalized to the measured ion current I_{ion} and laser power P_{laser} . Finally a gain correction G_{MCP} compensating for saturation effects of the MCP at high event rates is applied to obtain the fluorescence rate R_{fluo}

$$R_{\text{fluo}} = \frac{R_{\text{MCP}} - b_{\text{ion}} I_{\text{ion}} - b_{\text{laser}} P_{\text{laser}}}{I_{\text{ion}} P_{\text{laser}}} \frac{1}{G_{\text{MCP}}} . \quad (7)$$

The gain correction can, following methods by Giudicotti³² and Gershman³³, be written as

$$G_{\text{MCP}} = \exp\left(-\frac{R_{\text{MCP}}}{\varepsilon \cdot R_{50\%}}\right) \quad (8)$$

where the MCP efficiency is stated by the manufacturer to be $\varepsilon \approx 0.6$ for electrons with energies between 100 eV and 1000 eV³⁴ (the electrons from the cathode are accelerated by a positive voltage of 300 V applied to the front-plate of the MCP). $R_{50\%}$ corresponds to the rate where the MCP gain drops to 50% of the unsaturated value and has been determined to $R_{50\%} = 1603(32)$ kcps³¹. The corrected fluorescence rates, obtained by applying equation 7 to the raw rates, are displayed in figure 5, right panel. The similar height obtained for all three peaks provides confidence in the

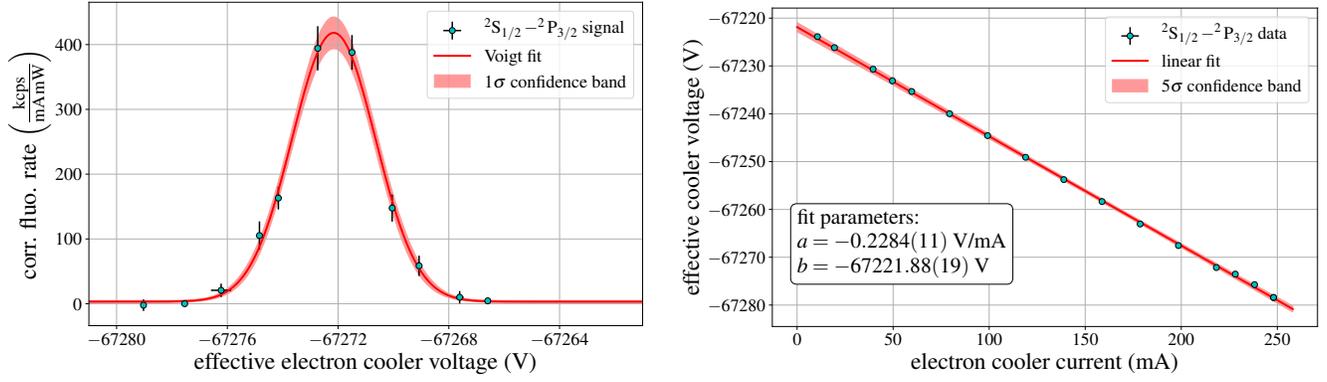


Figure 6. Left: Observed resonance curve for the ${}^2S_{1/2} - {}^2P_{3/2}$ transition at a cooler current of 218 mA. Right: Measured resonance voltages as a function of the cooler current for the ${}^2S_{1/2} - {}^2P_{3/2}$ transition.

normalizing procedure.

Accumulating all events from a given experimental run that belong to the same voltage step and plotting the corrected fluorescence rates against the effective electron cooler voltage (containing all corrections discussed in section 3), one obtains a resonance curve as displayed in figure 6, left panel. By fitting a Voigt profile to the data points, the precise voltage of the peak center is determined, together with its associated uncertainty.

Electron space charge correction To account for the electron space charge inside the ESR cooler, which modifies the acceleration potential felt by the electrons and therefore the ion velocity, the transition measurements were performed for a series of electron cooler currents, ranging from 10 mA to 250 mA. Figure 6 displays the observed resonance voltages for the ${}^2S_{1/2} - {}^2P_{3/2}$ transition (right panel) as a function of the electron cooler current. Performing linear fits to the two datasets allows to extrapolate the measurements to zero cooler current, thereby eliminating the influence of the electron space charge effect. The resulting resonance voltages for the two transitions are $U_0({}^2P_{1/2}) = -66774.13(11)$ V and $U_0({}^2P_{3/2}) = -67221.88(19)$ V.

Transition wavelengths From the resonance voltages of the two transitions at zero cooler current given above, the transition wavelength in the ions rest frame can be calculated according to equations 1 and 2, yielding $\lambda_0({}^2P_{1/2}) = 155.0779(12)_{\text{sys}}(1)_{\text{stat}}$ nm and $\lambda_0({}^2P_{3/2}) = 154.8211(12)_{\text{sys}}(2)_{\text{stat}}$ nm, where the statistical uncertainties result from the fit uncertainties of the resonance voltages and the systematic uncertainties result from the different contributions discussed in section 3 and given in detail in table 1 for the two transitions.

Table 2 provides a comparison of the results of this work to previous measurements and theoretical predictions. The wavelengths determined for the two transitions are in good agreement to the experimental results obtained from interferometry⁹ and plasma spectroscopy¹¹ and, within the uncertainties, also with the given theoretical predictions. It was possible to improve the precision with respect to the previous ESR measurement¹⁰ by about a factor three.

A further improvement in accuracy could be achieved in future measurements by tackling the three most important systematic uncertainties: 1) Measuring the work function difference between cooler electron gun and drift electrodes, e.g. by performing laser spectroscopy on ions with at a well-known transition. 2) Using a freshly calibrated high-voltage divider for the measurement of the cooler voltage and monitoring or stabilizing its temperature during the experiment. 3) Using a 8.5 digit DVM to measure the cooler voltage.

On the experimental side, the new cw UV-laser system provided a stable and reliable beam to the experiment and the novel XUV detection system proved to have a high detection efficiency for Lorentz-boosted fluorescence photons. To lower the background sensitivity of the XUV detector, dedicated shielding electrodes and a stepper-motor driven motion of the cathode are being implemented.

Table 1. Contributions of the individual systematic uncertainties to the overall error budget. A variable parameter is labeled 'var.'. If the uncertainty of a parameter is labeled 'max.', the corresponding contribution to the error budget of the wavelength has been estimated by omitting the correction from the analysis.

Parameter	value	uncertainty	unit	error contribution [nm]	
				$^2S_{1/2} - ^2P_{1/2}$	$^2S_{1/2} - ^2P_{3/2}$
work function	2.84	1.42	eV	0.00082	0.00081
scale factor	9999.698	0.155		0.00060	0.00060
DVM gain	1.0000006	0.0000131		0.00050	0.00050
set voltage cal.	var.	0.000067	V	0.00038	-
e-cooler current	var.	2	mA	0.00026	0.00026
DVM offset	0.0	0.00002	V	0.00012	0.00011
ion space charge	var.	max.	V	0.00005	0.00004
laser frequency	291.43340	0.00007	THz	0.00004	0.00004
angle laser - ion beam	0.0	0.036	°	0.00003	0.00003
MCP gain	var.	max.		0.00001	0.00003
root summed squares				0.00123	0.00116

Table 2. Overview of measured and calculated wavelengths for the $^2S_{1/2} - ^2P_{1/2}$ and $^2S_{1/2} - ^2P_{3/2}$ transitions obtained in this work and available from literature.

	year	method	$\lambda(^2P_{1/2})$ [nm]	$\lambda(^2P_{3/2})$ [nm]
Experiment:				
this work	2020	laser spectroscopy	155.0779(12)_{sys}(1)_{stat}	154.8211(12)_{sys}(2)_{stat}
Schramm et al. ¹⁰	2005	laser spectroscopy	155.0705(39) _{sys} (3) _{stat}	154.8127(39) _{sys} (2) _{stat}
Griesmann et al. ⁹	2000	interferometry	155.0781(2)	154.8204(1)
Bockasten et al. ¹¹	1963	plasma spectroscopy	155.0774(10)	154.8202(10)
Theory:				
Yerokhin et al. ⁸	2017	RCI ^a	155.080(29)	154.827(36)
Borschevsky ³⁵	2014	FSCC ^b	155.075	154.820
Tupitsyn et al. ¹⁰	2003	n/a	155.0739(26)	154.8173(53)
Johnson et al. ³⁶	1996	RMBPT ^c	155.078	154.819
Kim et al. ³⁷	1991	RMBPT+MCDHF ^d	155.060	154.804

^a Relativistic Configuration Interaction; ^b Fock Space Coupled Cluster; ^c Relativistic Many Body Perturbation Theory;

^d MultiConfiguration Dirac-Hartree-Fock

References

1. Winters, D.F.A. et al., Laser cooling of relativistic heavy-ion beams for FAIR, *Phys. Scr.* **T166**, 014048 (2015)
2. Eidam, L., Boine-Frankenheim, O., and Winters, D.F.A., Cooling rates and intensity limitations for laser-cooled ions at relativistic energies, *Nucl. Inst. and Meth. A* **887**, 102-113 (2018)
3. Beck, T., Rein, B., Sörensen, F., and Walther, T., Solid-state-based laser system as a replacement for Ar⁺ lasers, *Optics Letters* **41**, 4186-4189 (2016)
4. Siebold, M. et al., High energy Yb:YAG active mirror laser system for transform limited pulses bridging the picosecond gap, *Laser Photonics Rev.* **10**, 673-680 (2016)
5. Egelkamp, C. et al., Detection system for forward emitted XUV photons from relativistic ion beams at ESR, *GSI Scientific Report* **2015**, APPA-MML-AP-13 (2016)

6. Winters, D.F.A. et al., Laser spectroscopy of the $(1s^2 2s 2p) \ ^3P_0 - ^3P_1$ level splitting in Be-like krypton, *Phys. Scr.* **T144**, 014013 (2011)
7. Indelicato, P., QED tests with highly charged ions, *J. Phys. B: At. Mol. Opt. Phys.* **52**, 232001 (2019)
8. Yerokhin, V.A., Surzhykov, A., and Müller, A., Relativistic configuration-interaction calculations of the energy levels of the $1s^2 2l$ and $1s 2l 2l'$ states in lithiumlike ions: Carbon through chlorine, *Phys. Rev. A* **96**, 042505 (2017)
9. Griesmann, U. and Kling, R., Interferometric Measurement of Resonance Transition Wavelengths in C IV, Si IV, Al III, Al II, and Si II, *The Astrophysical Journal* **536**, L113-L115 (2000)
10. Schramm, U. et al., Laser Cooling and Spectroscopy of Relativistic C^{3+} Beams at the ESR, *Hyperfine Interactions* **162**, 181-188 (2005)
11. Bockasten, K., Hallin, R. and Hughes, T.P., The spectra of highly ionized light elements in a high temperature plasma, *Proc. of the Physical Society* **81**, 522-530 (1963)
12. Ullmann, J. et al., High precision hyperfine measurements in Bismuth challenge bound-state strong-field QED theory, *Nature Communications* **8**, 15484 (2017)
13. Franzke, B., The heavy ion storage and cooler ring project ESR at GSI, *Nucl. Instr. and Meth. B* **24/25**, 18-25 (1987)
14. Beck, T., Lasersystem zur Kühlung relativistischer C^{3+} -Ionenstrahlen in Speicherringen, *PhD thesis, Technische Universität Darmstadt*, 2015
15. Kiefer, D.C., Ultraviolette Laser zur Kühlung relativistischer Ionenstrahlen, *PhD thesis, Technische Universität Darmstadt*, 2019
16. Klammes, S., Charakterisierung von MgO:PPLN-Kristallen für ein Lasersystem zur Kühlung von Ionenstrahlen, *Master thesis, Technische Universität Darmstadt*, 2017
17. Vollbrecht, J., Lifetime analysis of the HFS states in hydrogen- and lithium-like bismuth and development of an in-beam detection system for extreme UV photons, *PhD thesis, Westfälische Wilhelms-Universität Münster*, 2016
18. Egelkamp, C., Further development of a XUV detector for spectroscopy measurements at the experimental storage ring at GSI, *Master thesis, Westfälische Wilhelms-Universität Münster*, 2016
19. Hannen, V. et al., Detection system for forward emitted photons at the Experimental Storage Ring at GSI, *JINST* **8**, P09018 (2013)
20. Lochmann, M. et al., Observation of the hyperfine transition in lithium-like bismuth $^{209}\text{Bi}^{80+}$: Towards a test of QED in strong magnetic fields, *Phys. Rev. A* **90**, 030501(R) (2014)
21. SIMION Ion and Electron Optics Simulator, Scientific Instrument Services, Inc., <https://simion.com>, accessed 2020-10-26
22. Samson, J.A.R., Photocathodes: Their efficiency and stability, *Nucl. Instr. and Meth.* **222**, 215-220 (1984)
23. Hoffmann, J., Logic Modules for Tracking Triggers, *GSI presentation*, accessed 2020-09-22
24. Bauer, S. and Rest, O., Kalibrierung Hochspannungsteiler Februar bis März 2013, *Internal Report, Westfälische Wilhelms-Universität Münster*, 2013
25. Ullmann, J., *private communication. Friedrich-Schiller-Universität Jena*, 2016
26. König, K., *Internal Report, Technische Universität Darmstadt*, 2018
27. Demtröder, W., Experimentalphysik 3: Atome, Moleküle und Festkörper, *Springer-Lehrbuch, Springer Berlin Heidelberg*, 2005

28. Lide, D., CRC Handbook of Chemistry and Physics: A Ready-reference Book of Chemical and Physical Data, *CRC-Press, 1996*
29. Behrens, J.D., Design and commissioning of a mono-energetic photoelectron source and active background reduction by magnetic pulse at the KATRIN experiment, *PhD thesis, Westfälische Wilhelms-Universität Münster, 2016*
30. Ullmann, J., Laserspektroskopie an hochgeladenen Bismutionen zum Test der Quantenelektrodynamik, *PhD thesis, Friedrich-Schiller-Universität Jena, 2017*
31. Winzen, D., Laser spectroscopy of lithium-like carbon with a novel XUV detection system at the ESR and construction of a precision high voltage divider for the CRYRING@ESR electron cooler, *PhD thesis, Westfälische Wilhelms-Universität Münster, 2020 (in preparation)*
32. Giudicotti, L., Bassan, M., Pasqualotto, R. and Sardella, A., Simple analytical model of gain saturation in microchannel plate devices, *Rev. of Sci. Instr.* **65**, 247-258 (1994)
33. Gershman, D.J. et al., Extending the dynamic range of microchannel plate detectors using charge-integration-based counting, *Rev. of Sci. Instr.* **89**, 073301 (2018)
34. RoentDek GmbH, List of particle species, https://www.roentdek.com/products/guidelines/List_of_particle_species.pdf, accessed 2020-09-29
35. Borschevsky, A., *private communication. Rijksuniversiteit Groningen, 2014*
36. Johnson, W., Liu, Z., and Sapirstein, J., Transition rates for lithium-like ions, sodium-like ions and neutral alkali-metal atoms, *Atomic Data and Nuclear Data Tables* **64**, 279-300 (1996)
37. Kim, Y.-K., Baik, D.H., Indelicato, P. and Desclaux, J.P., Resonance transition energies of Li-, Na-, and Cu-like ions, *Phys. Rev. A* **44**, 148-166 (1991)

Acknowledgements

This work was supported by the German Federal Ministry of Education and Research (BMBF) under grant numbers 05P15PMFAA, 05P18RDFAA, 05P09RDFA3, 05P12RDRB2, 05P15RDFA1 and 05P16ODFA1. D.W. and J.U. acknowledge support from HGS-HiRe. We appreciate the technical support during the beam-time by the GSI accelerator department.

Author contributions statement

D.F.A.W. conceived and organised the experiment. D.K., S.K., and T.W. developed the TU Darmstadt CW laser system. M.S. and M.L. developed the TU Dresden pulsed laser system. D.W., V.H., C.E., H.-W.O., J.V. and C.W. developed the XUV detector. L.E., R.S. and J.U. prepared the data acquisition system. W.N. and J.U. provided the HV divider. D.W., V.H., M.B., A.B., C.E., D.K., S.K., T.K., R.S., J.U., HB.W., ZQ.H., L.E. and D.F.A.W. worked on experimental shifts. D.W. performed the analysis of the data. M.B., X.M., W.N., T.S., T.W. and C.W. are group leaders. V.H., D.W. and D.F.A.W. prepared the manuscript. All authors reviewed the manuscript.

Competing interests

The authors declare no competing interests.

Figures

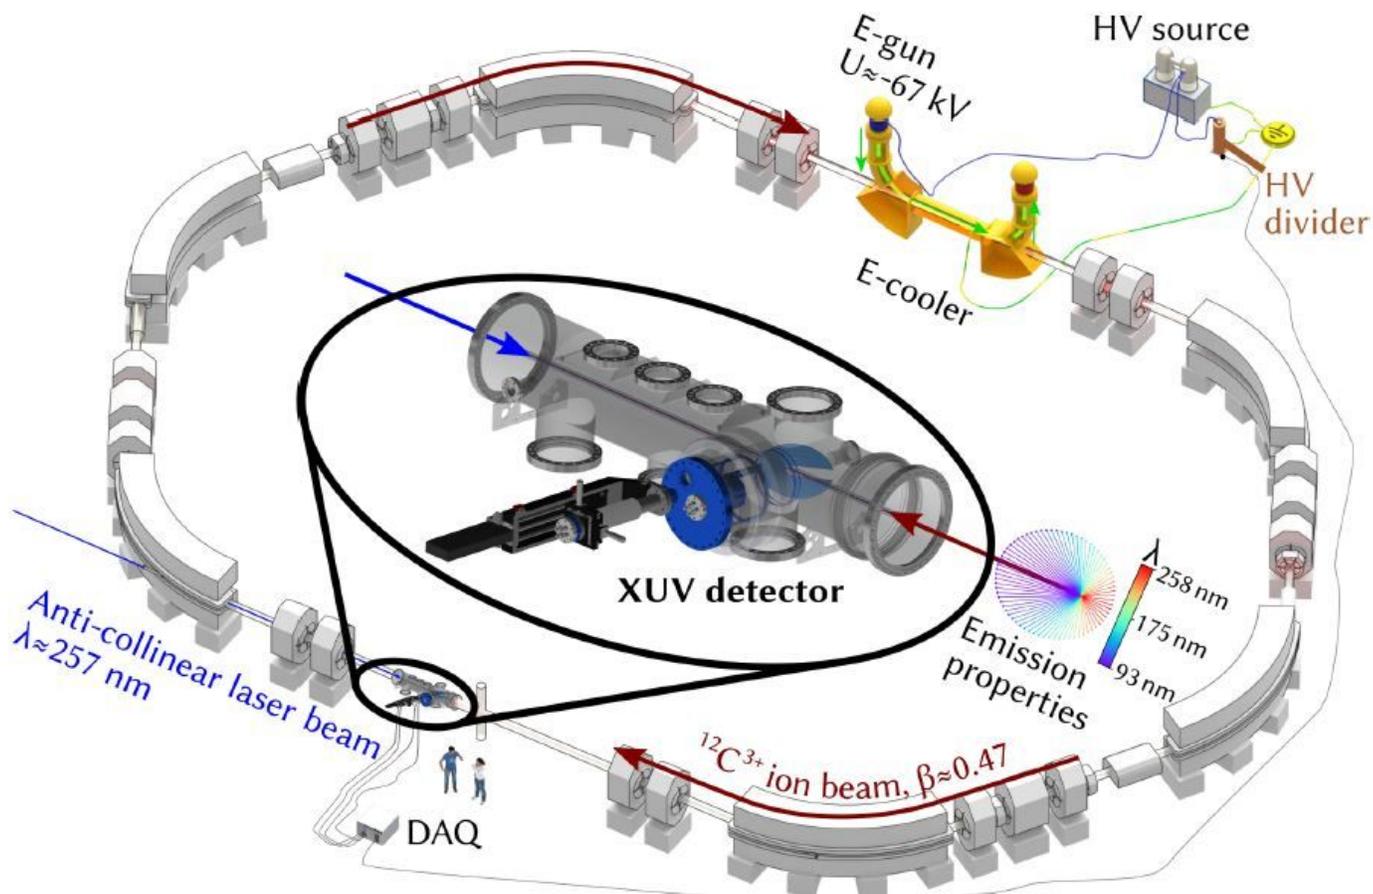


Figure 1

Schematic view of the ESR with an enlarged view of the optical detection region. The ion beam is circling clockwise in the ring while the laser beam is counterpropagating the ions inside the straight section of the ESR (figure adapted from¹²).

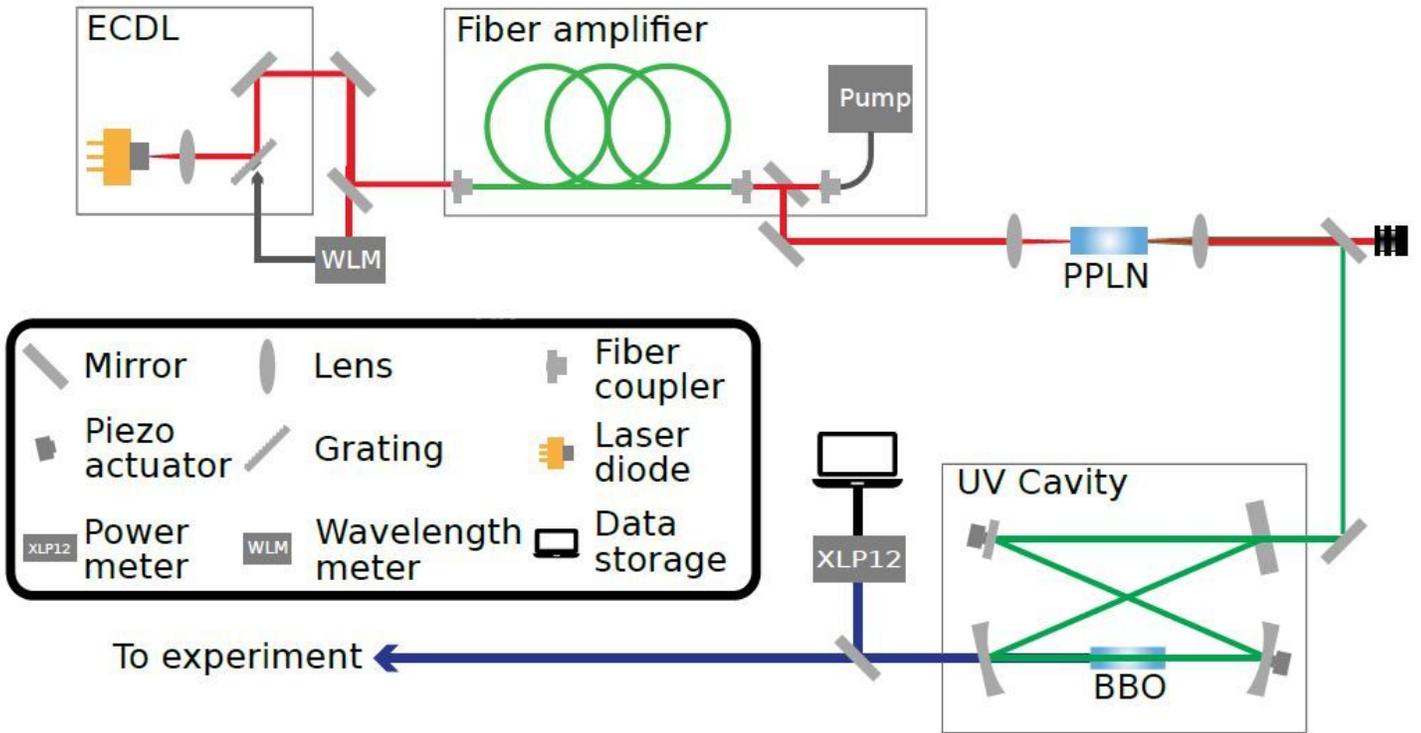


Figure 2

Schematic view of the continuous-wave laser system.

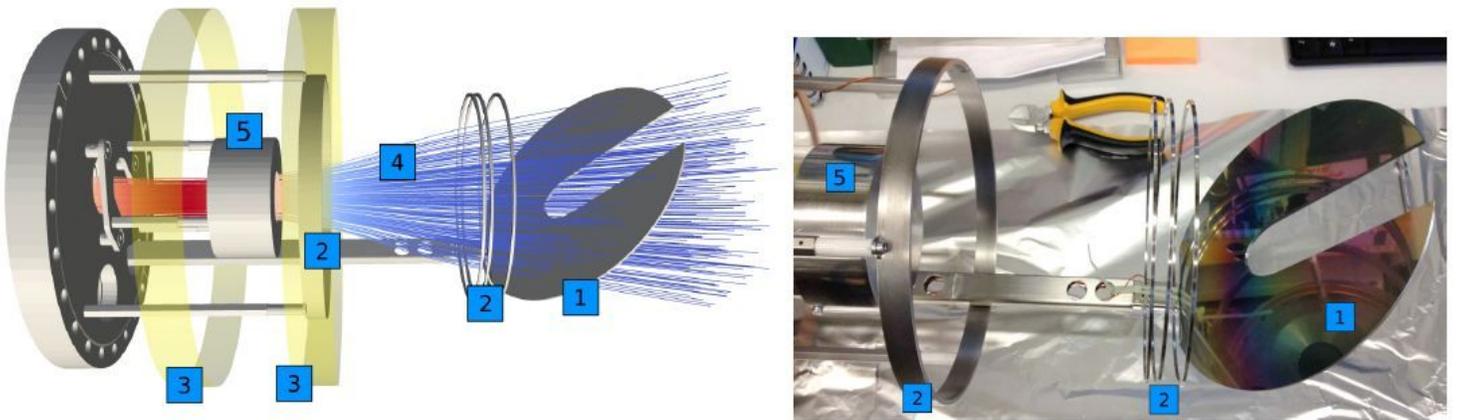


Figure 3

Left: schematic view of the XUV detection system with movable cathode (1), electrodes (2), magnet coils (3), magnetic field lines (4) and MCP (5). Right: cathode plate with 300 nm CsI coating.

XUV detector

Electronics

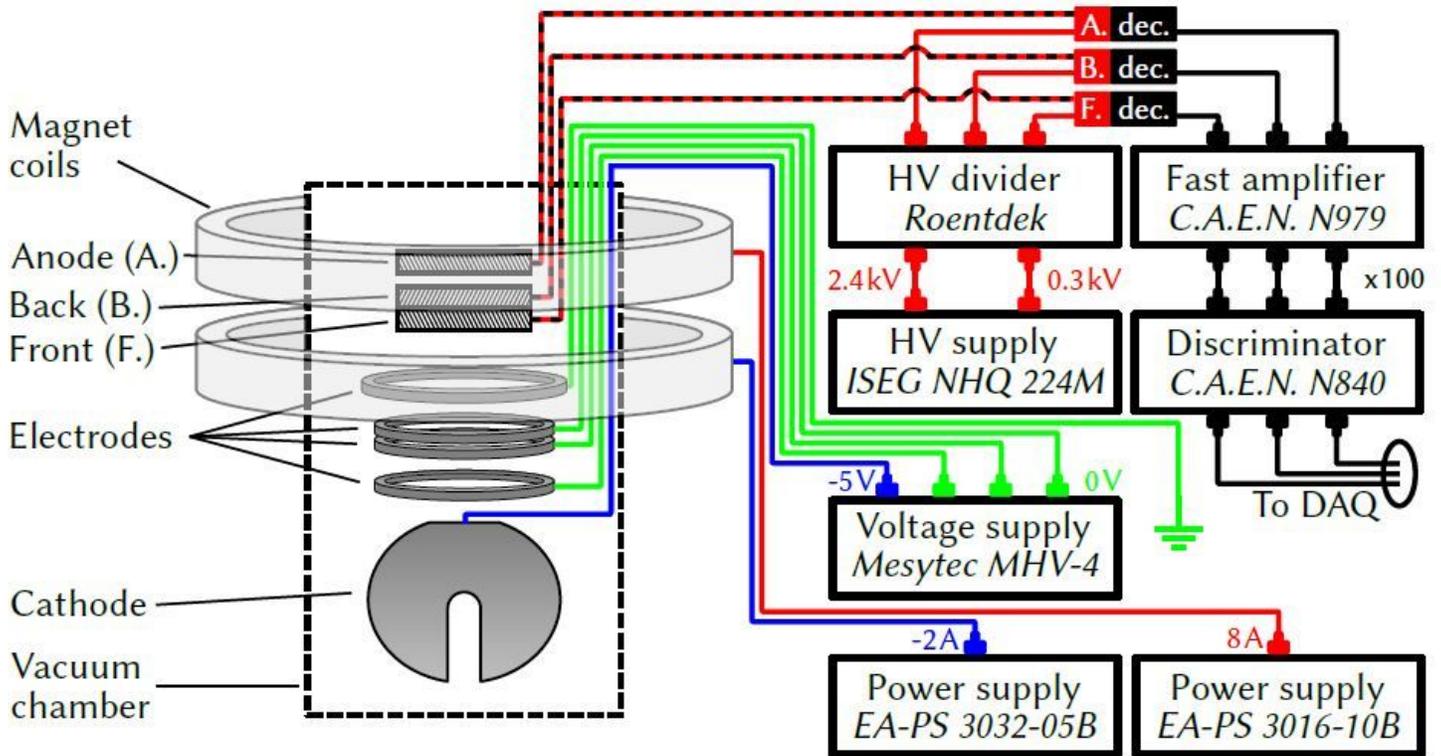


Figure 4

Interconnections of the XUV detection system with power supplies and front-end electronics of the data acquisition system.

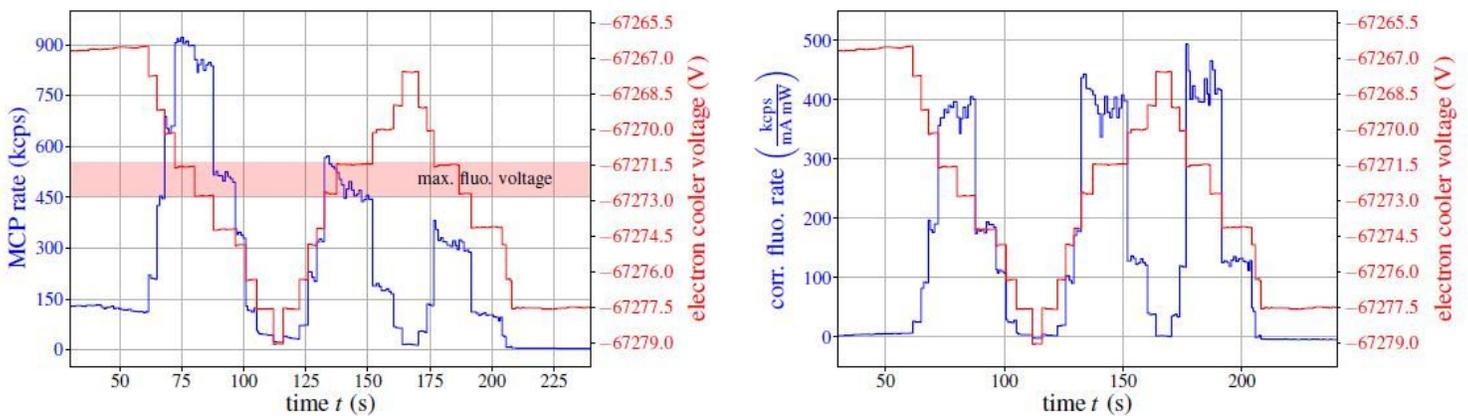


Figure 5

Left: raw detector rates (blue curve) for a scan of the electron cooler voltage (red curve) over the resonance region of the 2S_{1/2}-2 P₃₌₂ transition. Right: fluorescence rates of the same voltage scan after background subtraction, normalization to ion current and laser power and MCP gain correction.

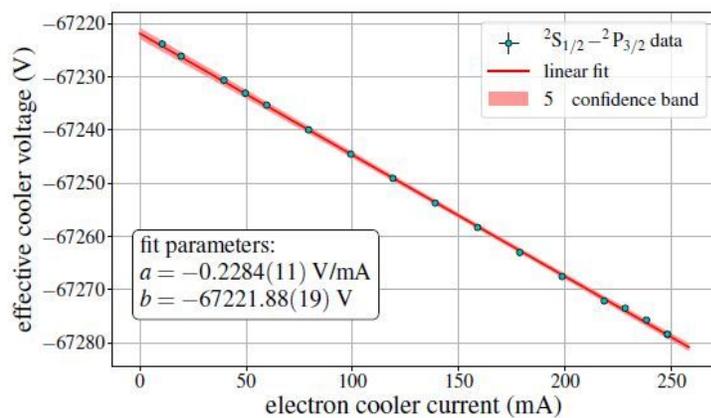
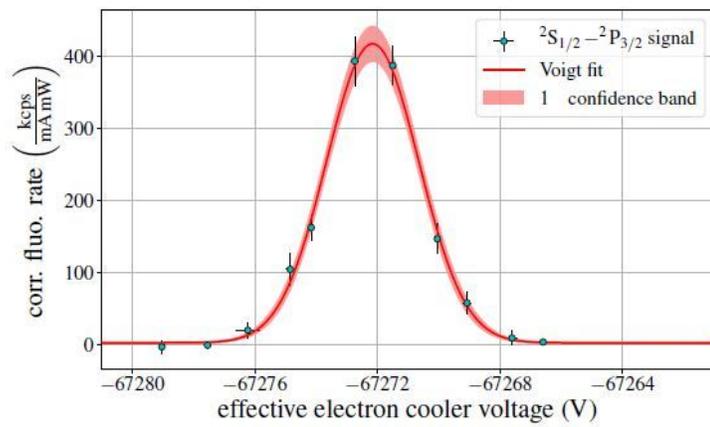


Figure 6

Left: Observed resonance curve for the $2S_{1/2} - 2P_{3/2}$ transition at a cooler current of 218 mA. Right: Measured resonance voltages as a function of the cooler current for the $2S_{1/2} - 2P_{3/2}$ transition.