

Paleochannel groundwater discharge to the River Niger in the Iullemmeden Basin estimated by sub-surface geophysics and piezometry mapping

Rabilou ABDOU MAHAMAN (✉ rabdoumahaman@gmail.com)

Université Abdou Moumouni de Niamey

Yahaya NAZOU MOU

Université Abdou Moumouni de Niamey

Guillaume FAVREAU

IGE, Université Grenoble Alpes, IRD, CNRS, Grenoble-INP

Boukari ISSOUFOU OUSMANE

Université Abdou Moumouni de Niamey

Marie BOUCHER

Université Abdou Moumouni de Niamey

Maman Sani ABDOU BABAYE

Université Dan Dicko Dan Koulodo de Maradi

Fabrice M. A. LAWSON

Institut National de l'Eau (INE), Université Abomey-Calavi

Jean-Michel VOUILLAMOZ

IGE, Université Grenoble Alpes, IRD, CNRS, Grenoble-INP

Abdou GUERO

Niger Basin Authority

Anatoly LEGCHENKO

IGE, Université Grenoble Alpes, IRD, CNRS, Grenoble-INP

Richard Graham TAYLOR

Research Article

Keywords: Semi arid area, groundwater flow, alluvial aquifer

Posted Date: September 12th, 2022

DOI: <https://doi.org/10.21203/rs.3.rs-2038747/v1>

License:  This work is licensed under a Creative Commons Attribution 4.0 International License.

[Read Full License](#)

Paleochannel groundwater discharge to the River Niger in the Iullemeden Basin estimated by sub-surface geophysics and piezometry mapping

Rabilou ABDOU MAHAMAN ^{1*}, Yahaya NAZOU MOU ¹, Guillaume FAVREAU ^{2,3}, Boukari ISSOUFOU OUSMANE ¹, Marie BOUCHER ^{1,2}, Maman Sani ABDOU BABAYE ⁴, Fabrice M. A. LAWSON ⁵, Jean-Michel VOUILLAMOZ ², Abdou GUERO ⁶, Anatoly LEGCHENKO ² and Richard Graham TAYLOR ⁷

¹Département de Géologie, Université Abdou Moumouni de Niamey, Niger

²IGE, Université Grenoble Alpes, IRD, CNRS, Grenoble-INP, Grenoble, France

³Institut de Recherche pour le Développement (IRD), Niamey, Niger

⁴Département de Géologie, Université Dan Dicko Dan Koulodo de Maradi, Niger

⁵Institut National de l'Eau (INE), Université Abomey-Calavi, Cotonou, Benin

⁶Niger Basin Authority, 288 rue du Fleuve Niger, BP 729, Niamey, Niger

⁷Department of Geography, University College London, United Kingdom (UK)

***Corresponding Author: Rabilou ABDOU MAHAMAN (rabdoumahaman@gmail.com)**

Summary

In drylands groundwater is often the only perennial source of freshwater to sustain domestic water supplies and irrigation. Knowledge of the pathways and dynamics of groundwater discharge and recharge is essential to inform sustainable and rational management of limited water resources. The lower valley of the Dallol Maouri in Niger represents a large fossil tributary (i.e. paleochannel) of the River Niger and drains groundwater regionally from the Iullemeden Basin through coarse-grained Quaternary sediments. The objective of this paper is to quantify groundwater discharge within this paleochannel using piezometry and surface geophysics (TDEM : Time Domain Electromagnetic, MRS :

Magnetic Resonance Sounding). TDEM and MRS experiments were conducted at 21 sites along 3 transects show respectively the mean thickness of Quaternary alluvium varies from 11 m to 18 m with the effective porosities ranging from 20% to 33% and hydraulic conductivity of 2×10^{-3} m/s. Dense piezometric surveys along drainage channel reveal hydraulic gradients of 0.2 ‰ to 0.3 ‰ that indicate Darcy fluxes of 1,000 to 2,000 m³/day (dry season, i.e. minimum value). Paleochannel discharge, which currently provides baseflow to the River Niger is the focus local demand to increase access to water for drinking, livestock watering, and irrigation.

Keywords : Semi arid area, groundwater flow, alluvial aquifer

1 Introduction

Drylands are characterised by ephemeral rivers (D'Odorico and Bhattachan 2015 ; Tarnavsky et al. 2013 ; Koch and Missimer 2016 ; Davies et al. 2016). The Sahel of West Africa is characterized by strong seasonal variations in rainfall, causing intense runoff to topographic depressions that facilitate focus recharge (Favreau et al. 2009). An intensification of precipitation, resulting in fewer but heavier rainfalls, has been observed in the Sahel (Taylor et al. 2017) in response to global warming and is expected to amplify focused groundwater recharge (Cuthbert et al. 2016 ; 2019 ; Taylor et al. 2013a). Recent high-resolution modelling of Sahelian climate suggests further that the projected intensification of rainfall by climate change is even greater than that estimated previously by General Circulation Models (Berthou et al. 2019). Notwithstanding potential increases in groundwater recharge from the amplification of heavy rainfalls, growing demand for freshwater is placing increasing pressure on perennial groundwater resources (Taylor et al. 2013b; DeGraaf et al. 2019) whose discharges sustain dryland ecosystems.

In the drylands of Niger, groundwater is a vital source for supplying drinking water to most large cities and rural areas as well as for supplying livestock and irrigation (Nazoumou et al. 2016). Recent hydrogeological studies of the unconfined aquifer of Continental Terminal in the southwestern Iullemeden Basin have shown a rise in the water table since the 1960s (Favreau 2000; Leduc et al.

2001; Favreau and al. 2002; Leblanc et al. 2008, Favreau et al. 2009). In this dryland region, knowledge of the pathways and dynamics of groundwater discharge contained in Quaternary alluviums from valleys of fossil tributaries is essential for the sustainable and rational management of these vital resources.

Several studies have demonstrated the efficacy of geophysical surveys for characterizing the geometry and lithology of paleochannels in drylands in order to assess the availability of groundwater. Oladunjoye et al. (2020) characterized the geometry of the Ilora Valley in southwestern Nigeria using vertical electric soundings. Similarly, Owen and Dahlin (2005) delineated the extent and thickness of the Quaternary infill of the Umzingwane Valley in Zimbabwe using Vertical Electric Soundings (VES). Othman et al. (2018) characterized the geometry of Pliocene aquifer using VES and TEM sounding at the west Nile Delta in Egypt. In drylands of Australia, Airborne Electromagnetic (AEM) geophysical surveys and piezometry have been used to define the dimensions of Gallingarra Paleochannel, and evaluate the groundwater discharge to the Moore River (Speed and Killen 2020). In the arid Heihe Basin of China, paleochannel groundwater discharges to the rivers are considered critical to regulating the hydrological cycle and ecosystem health (Yao et al. 2016; 2018; Zhao et al. 2016).

Magnetic Resonance Sounding (MRS) is a non-invasive geophysical method (Legchenko and Valla 2002) which makes it possible to obtain hydrogeological parameters of an aquifer by directly measuring a signal emitted by the hydrogen protons of the water molecule (Vouillamoz et al. 2008). TDEM (Time Domain Electromagnetism) is an electromagnetic geophysical sounding method that allows determining the resistivity as a function of depth from the diffusion of a transient electromagnetic field (Fitterman and Stewart 1986; Descloitres 1998). The combination of these two methods has already been successfully applied in Niger in the study of the superficial aquifer of the Continental Terminal (Vouillamoz et al. 2008; Boucher et al. 2009a, Boucher et al. 2009b, Boucher et al. 2012) and on the unconfined Quaternary aquifer in the Komadugu Yobé valley of the Lake Chad basin (Descloitres et al. 2013).

The lower valley of Dallol Maouri is one of the fossil tributaries of the River Niger (paleochannel) which drains regional groundwater through Quaternary alluvium. This area is one of the most suitable regions of Niger for irrigation (Cochand 2007; Dambo 2007) and has been the subject of several

hydrogeological studies since the 1970s. Early studies carried out by FAO 1970 exploited deep boreholes and constructed several piezometers to characterize the hydrodynamic parameters of aquifers in the area through pumping tests ; the overall direction of groundwater flow and recharge areas were also mapped (FAO 1970). Gaoh (1993) characterized the aquifers of the Continental Terminal through a geophysical investigation and (Guéro 2003) through a hydrogeochemical and hydrodynamic approach. Recently, Abdou Ali (2018) characterized aquifers through electric soundings, increasing hydrogeological knowledge of the Dallol Maouri valley. These previous studies examined the whole basin of Dallol Maouri whereas here we focus on the Quaternary formations of the lower valley of the dallol Maouri.

Applying MRS and TDEM, the objective of this paper is to quantify the discharge of groundwater in this paleochannel in the lower valley of the Dallol Maouri valley in the Iullemeden Basin. TDEM (Time Domain Electromagnetism) and MRS (Magnetic Resonance Sounding) geophysical surveys were carried out on three transverse transects and a longitudinal transect of the study area. In this paleochannel of the lower Dallol Maouri, twenty-one TDEM and MRS soundings were conducted in order to characterize the geometry of aquifers and their hydrodynamic parameters including aquifer transmissivity. Piezometric variations at leveled piezometers along the paleochannel were used for to assess prevailing hydraulic gradients and quantify groundwater flow.

2 Presentation of the study area

2.1 General context

Niger has a hydrographic network consisting essentially of temporary rivers with the exception of the main channel of the River Niger. The hydrographic basin of River Niger in Niger is considered to host substantial groundwater resources, contained in the geological formations of the Iullemeden basin and in the alluvial deposits of the valleys of the fossil tributaries of the River Niger (Favreau et al. 2012 ; MH/A 2017). The valley of the Dallol Maouri is a fossil tributary on the eastern bank of the River Niger in Niger and has a drainage area of ~45,000 km² (Fig. 1). It is the southernmost area of Niger and the most humid. mean annual rainfall recorded at Gaya (Fig. 2) varies from 600 to over 1000 mm occurs

over seven months of the year from April to October with the most intense months of rainfall from June to September. This region is classified as semi-arid within the Sudanese hydro-climatic zone. Diurnal temperatures vary considerably by values that can exceed 14°C. Potential evapotranspiration, estimated by the Penman method, is 2360 mm per year.

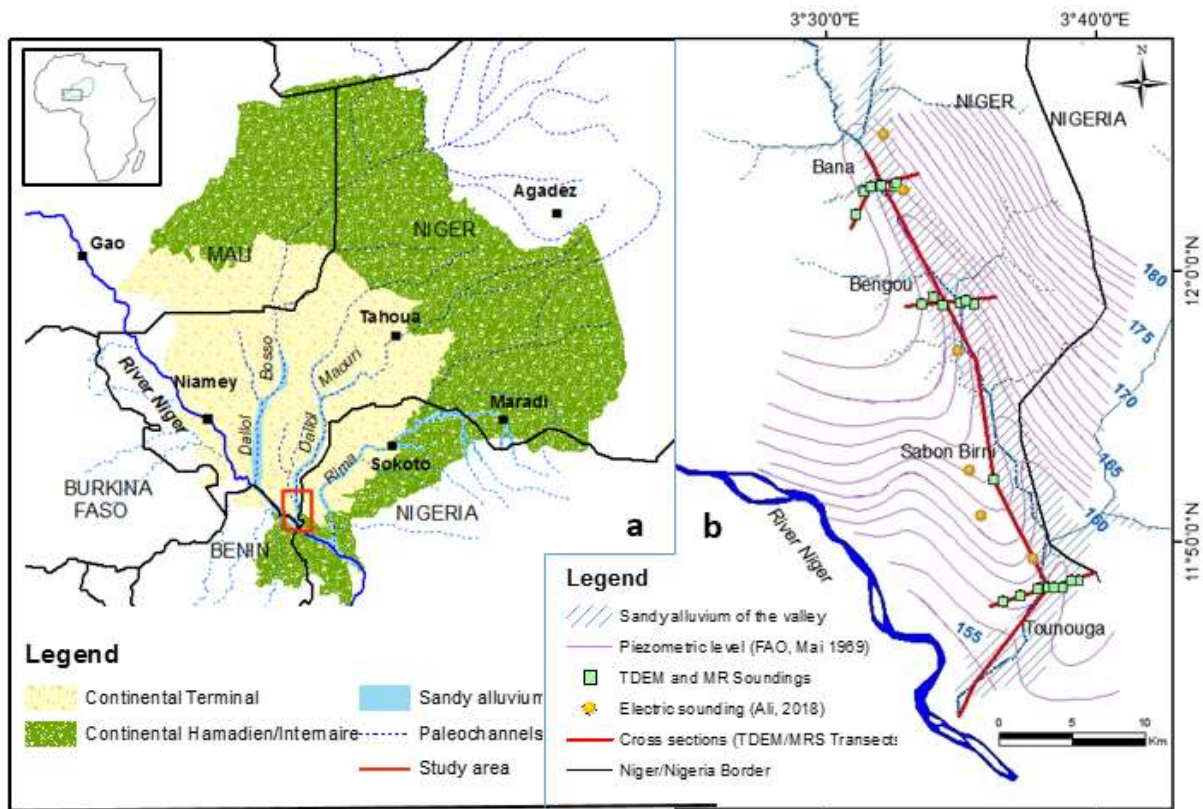


Fig. 1 (a) Surface geology with inset map of Africa showing context ; (b) location of TDEM and MRS drilling sites as well as piezometric contours of 1960's (FAO, 1969)

The valley of the Dallol Maouri is characterized by tropical ferruginous soils with little or no leaching of clays and ferrallitic soils on the plateaux and terraces of the River Niger. Hydromorphic soils are found in the valleys of the Dallol and the River Niger (Gavaud 1977). Discharges of the regional aquifer in the lowlands of the valley form a string of ponds that become interconnected during the rainy season and flow towards the River Niger. Due to its favorable climatic conditions for agriculture and livestock, this area is experiencing strong demographic pressures. The Gaya locality has an area of 4,044 Km² (Dambo 2007). The population of the Gaya area has increased from 164 000 inhabitants in 1988 to over 261 000

inhabitants in 2012, representing a density of 65 inhabitants/km² and annual growth rate of 3.4% (INS 2012) ; these changes are increasing freshwater demand for domestic and agricultural purposes.

2.2 Geological context

In the lower valley of the Dallol Maouri, the surface geology comprises Quaternary alluvium. On the plateau, the geological formations are made up of a detrital complex of Oligocene age, the siderolithic series of Ader Doutchi, fine to medium clayey oolitic sands (CT1), clayey sandstones of CT3, and sandstones of CH, (BGR/ABN 2019) (Fig. 2).

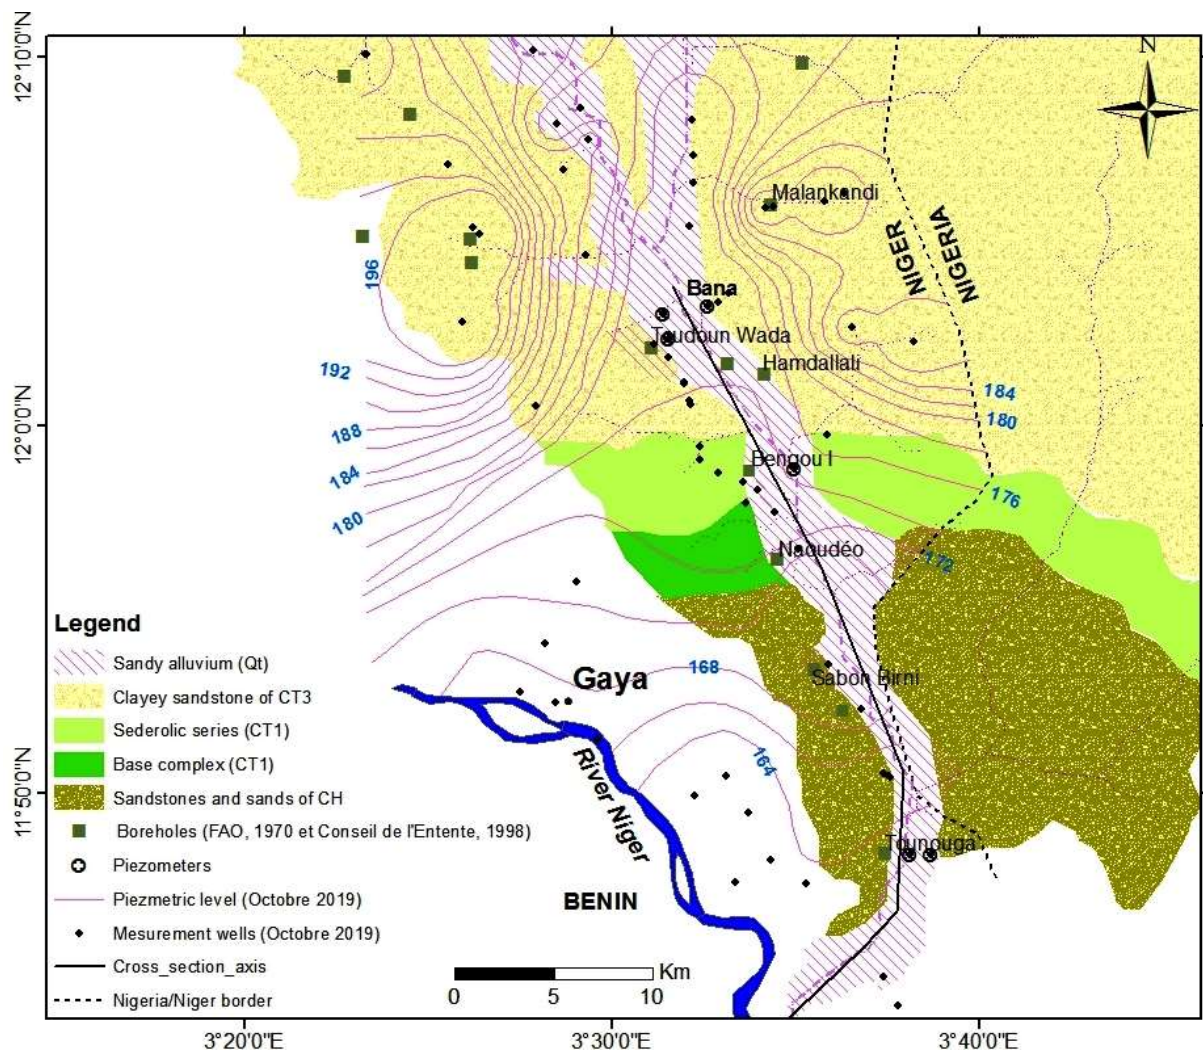


Fig. 2 Surface geology and piezometric contours of the unconfined aquifer in the Dallol Maouri valley and interfluvies of southwestern Niger (BGR/ABN, 2019)

A geological section along the longitudinal axis of the Dallol Maouri valley, presented in Fig. 3, is based on a synthesis of borehole logs with depths varying between 55 and 346 m, electrical soundings from previous work (CGG 1968; Abdou Ali 2018), and geological sections found in the literature (FAO 1970; Guéro 2003 and BGR/ABN 2019). This cross-section presents a succession of four (4) geological formations:

Precambrian basement rocks reached by Bengou I borehole at a depth of 342 m (FAO 1970). It is at 11 m in Talambou (Northwest of Gaya), 375 m in Dosso (north of the study area), and sub-outcrops on the banks of the Niger River between Koulou and Sia (Guéro 2003), west of the study area.

The Lower Cretaceous Continental Hamadien is considered to be the equivalent to the continental deposits of the Illo Formation of the Nigerian part of the Iullemeden Basin (BGR/ABN 2019). This formation outcrops in the southern part of the study area between the Sabon Birni area and the Niger River. Its thickness is estimated at 323 m at the borehole of Bengou I, (FAO 1970). The geological formation of the Continental Hamadien is made up of alternating fine to coarse sands and more or less clayey sandstones. The weathered sandstone formations of the Bengou sector are succeeded by more clayey sandstone formations at the village of Sabon Birni (Fig. 3). In places, there are traces of lignite and pyrite strewn in the sandstone formations.

Marine deposits of the Palaeocene-Eocene (Tertiary) present a geological formation of low thickness consisting mainly of marl, marl-limestone, gray to whitish clays and attapulgitites in the western part of the Dallol Fogha (Guéro 2003). It marks the upper boundary of the sandstone formations of the Continental Hamadien. Its thickness is estimated at 3 m at the Toudoun Wada borehole and disappears under the alluvium between Bana and Hamdallahi (Fig. 3).

The Continental Terminal (CT), equivalent to the Gwandu formation in Nigeria (Greigert 1966), outcrops on all plateaux of the Bana and Bengou sectors, but this formation is absent in the valley of the study area. The CT is traditionally subdivided into three main lithological units: the siderolithic series of Ader Douchi (CT1), the sandy clay series with lignites (CT2), and the clayey sandstones of Middle

Niger (CT3) (Greigert 1966). The siderolithic series is characterized by alternating loose sands and oolites. The thickness of this formation is estimated at 20 m by borehole of Malankadi, 5 km north of Bana (Conseil de l'Entente 1998) and 75 m in Dogondoutchi (Guéro 2003), 170 km north of the study area. CT2 does not appear in the study area. It is a formation characterized by the intercalation of fine to coarse sands and gray clay to lignite. The thickness of this formation is estimated at 60 m at Dogondoutchi (Guéro 2003). The Middle Niger clayey sandstone series (CT3) constitutes the most extensive outcrop formation in the study area. CT3 is essentially made up of alternations of ferruginous sandstone and yellow and reddish clays. In the study area, its thickness is estimated at 15 m by Toudoun Wada borehole. It is 175 m in Dogondoutchi (Guéro 2003), north of the study area.

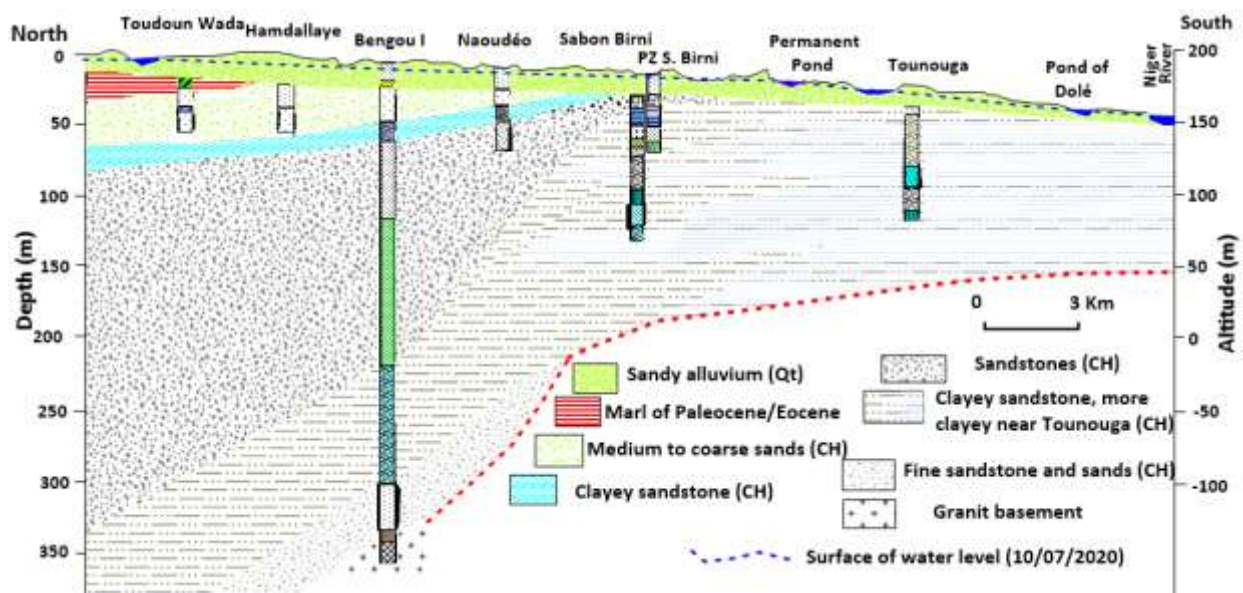


Fig. 3 Geological cross section along the longitudinal axis of the lower Dallol Maouri valley

2.3 Hydrogeological context

Previous hydrogeological studies (FAO 1970; Greigert 1978; Armand 1987; Gaoh 1993; Guero 2003 and Abdou Ali 2018) have described the general characteristics of the aquifers of the Dallol Maouri valley. Most groundwater is considered to be in detrital terrigenous sedimentary formations of the Cretaceous (Continental Intercalaire/Hamadien) and the Tertiary-Quaternary formations (Continental Terminal and alluvium valleys). In the lower valley of the Dallo Maouri dallol, groundwater is located

in alluvial formations and terrigenous detrital formations of the Continental Hamadien (FAO 1970). The two formations form an unconfined aquifer in the valley with a thickness of 220 m in the Bengou sector (Guéro 2003), but the Continental Hamadien formations present a confined aquifer between 300 and 342 m deep, and in the northern part of the study area where the formation of Continental Hamadien is sealed by Paleocene-Eocene marine formations. Based on pumping - test evidence from 14 boreholes and 24 piezometers, average values of transmissivity and hydraulic conductivity are respectively $3 \times 10^{-2} \text{ m}^2/\text{s}$ and $6.5 \times 10^{-4} \text{ m/s}$, an estimated storativity 3.5×10^{-4} was computed north of Bana where the aquifer is confined.

The piezometric map of the water table of the lower Dallol Maouri from 1969 shows a north-south flow along the axis of the valley with a hydraulic gradient of 0.3 ‰ (FAO, 1970). On the left bank plateau, the contours are rectilinear (Fig. 1) and there is an absence of evidence of human withdrawals from the unconfined aquifer during this period. The 2019 piezometric map (fig. 2) also shows a north-south flow along the axis of the valley, with a very low gradient of 0.4 ‰. On the plateau, the flow converges towards the Dallol Maouri valley with a hydraulic gradient of 3 ‰ on both banks of the Dallol Maouri. The disappearance of contours 160 m and 155 m towards the outlet also highlights a rise in the unconfined aquifer of 4 to 6 m, the high values of the hydraulic head on either bank suggest that the plateaux may constitute recharge areas to the unconfined aquifer.

3 Materials and Methods

3.1 Surface geophysics : combined use of Time Domain Electromagnetism and Magnetic Resonance Sounding

TDEM (Time Domain Electromagnetism) makes it possible to determine the vertical distribution of soil resistivity with depth (Descloitres 1998). Detailed descriptions of the method can be found in Fitterman and Stewart (1984), Descloitres (1998), and Reynolds (2011). Magnetic Resonance Sounding (MRS) is a non-invasive geophysical method (Legchenko and Valla 2002). This method makes it possible to obtain hydrogeological parameters of an aquifer by directly measuring a signal emitted by the hydrogen protons of the water molecule (Vouillamoz et al. 2008). Details of the method can be found in

(Legchencko and Valla 2002). This method has the advantage of having information that is directly related to the mobile water content in the subsoil and a relaxation time related to the size of the pores (Schirov et al. 1991).

The hydrogeophysical parameters from MRS are the water content, which represents the part of the investigated volume occupied by mobile water (Legchencko et al. 2004; Lubczynski and Roy 2005), and the proton relaxation time constants T_1 and T_2 , which provide information on the average pore size (Legchencko et al. 2002).

The water content (θ_{MRS}), given by MRS, is comparable to the effective porosity (Lubczynski and Roy 2005).

The hydraulic conductivity and transmissivity of the aquifer are deduced from these parameters using the following equations 1 and 2 (Kenyon 1997):

$$\mathbf{K}_{MRS} = \mathbf{C}_p \times \theta_{MRS}^a \times \mathbf{T}_1^b \quad (eq. 1)$$

$$\mathbf{T}_{MRS} = \mathbf{K}_{MRS} \times \Delta \mathbf{Z} \quad (eq. 2)$$

where \mathbf{K}_{MRS} : MRS hydraulic conductivity (m/s), \mathbf{T}_{MRS} : MRS transmissivity (m²/s), θ_{MRS} : water content, and C_p , a , and b are the parametric factors, dependent on the geology of the area, $\Delta \mathbf{Z}$ the thickness of aquifer. The factors a and b can take values 1 and 2 or 4 and 2 respective (Plata and Rubio 2008). It is generally the couple 1 and 2 which is the most used and which gives satisfactory results (Plata and Rubio 2008; Lubczynski and Roy 2005; Boucher et al. 2009a; Vouillamoz et al. 2008; Chalikakis et al. 2008; Descloitres et al. 2013, Kemgang et al. 2019). The parametric factor C_p depending on the geology of the area, requires calibration with data from pumping tests (Chalikakis et al. 2008; Boucher et al. 2009a). The geological formations of the study area are similar to the geological formations of the intensely studied Continental Terminal (CT3) (Favreau 2000; Favreau et al. 2009; Boucher et al. 2009a). All the hydrodynamic parameters (\mathbf{K}_{MRS} and \mathbf{T}_{MRS}) were estimated on all the points of the soundings using the

parametric factor ($C_P = 1.4 \times 10^{-8}$) determined on the unconfined aquifer of the Continental Terminal (Boucher et al. 2009a).

3.2 Field implementation

TDEM soundings employed Temfast 48, developed by Applied Electro Magnetism Research (AEMR Technology). This very light device, ~2 kg, enabled relatively deep soundings ranging from 50 to 200 m, recorded by a “nomad” mini-computer. For MRS soundings, NUMIS^{PLUS} (which has an investigation depth of approximately 100 m) and NUMIS^{LITE} (which has an investigation depth of approximately 50 m), developed by IRIS Instruments were used. Two campaigns of geophysical sounding (TDEM and MRS) were executed in December-January 2019 and April 2020. A total of twenty one (21) experiments were conducted, 20 sites on 3 transects perpendicular to the valley and one site at Sabon Birni. The first campaign was conducted at 13 sites. At each site, a series of 3 TDEM soundings were carried out with loops of 50 and 150 m, in coincident mode, and 150× 50 in central mode. During the second campaign, only one TDEM sounding per site was carried out with a 100 m side loop at 8 sites. The characteristics of all MRS experiments are summarised in Table 1. Eight-square loops were used to minimize the effect of electromagnetic noise on sounding (Trushkin et al. 1994).

3.3 Data inversion and assessment of the quality of sounding

TDEM soundings were inverted with TEM-RES software (AEMR Technology). The interpretation method adopted for the data follows that of Décloîtres et al. (2013).

For the inversion of the MRS, SAMOVAR_V11.6 software was used. The inversion is made by assuming a horizontally stratified tabular field (Vouillamouz 2003). The geological logs constrain the interpretation of the MR Soundings. The strategy adopted consists first of all of inverting the data into a “block” following a model of two (2) to three (3) layers consistent to the geology revealed by the geological logs and the TDEM results. To assess the quality of the data collected, two parameters were used. The first parameter is the signal-to-noise (S/N) ratio which must be greater than 4 (Descloîtres et al. 2013), for a sounding to be considered of good quality. The second parameter is the difference

between the average frequency of the MRS signal (Larmor frequency) and the average excitation frequency of the hydrogen protons which must be less than or equal to 1 Hz in absolute value, (Chalikakis et al. 2008).

The characteristics of MRS soundings are summarized in Table 1. Each experiment showed a good signal to noise ratio (S/N) ranging from 6 to 77 ; differences between the average frequency of the MRS signal (Larmor frequency) and average excitation frequency of the hydrogen proton varied from -1.41 to 1.56 Hz.

3.4 Hydrogeological method

Darcy's Law is applied to estimate groundwater discharge in the Bana, Bengou and Tounouga areas and the average linear velocity of groundwater through equations 3 and 4, respectively.

$$Q = -K \times A \times i \quad (eq. 3)$$

$$v = (-K \times i) / \phi \quad (eq. 4)$$

where Q is groundwater discharge (m³/day) ;

K is the hydraulic conductivity of Quaternary alluvium (m/day) ;

A is cross-sectional area (m²) ;

i is the hydraulic gradient (unitless);

v is the average linear groundwater velocity (m/day);

and ϕ effective porosity $\approx \theta_{MRS}$ (unitless).

Hydraulic conductivity K and aquifer thickness (ΔZ) are determined from surface geophysical soundings using TDEM and MRS. The hydraulic gradient was determined using observed variations in hydraulic head at levelled piezometers along the lower valley of Dallol Maouri

Table 1. Characteristics and results of MRS soundings in the lower valley of the dallol Maouri

Site	Coordinates		Formation	Loop size	Signal/Noise			ALLUVIUM (Qt)			MARL (Paleocene-Eocene)			Sandstone (CH)	
	Longitude	Latitude			S/N	Δf (Hz)	θ_{MRS} (%)	K_{MRS} (10^{-3} m/s)	Δz (m)	T_{MRS} (10^{-2} m ² /s)	θ_{MRS} (%)	K_{MRS} (m/s)	Δz (m)	θ_{MRS} (%)	K_{MRS} (10^{-3} m/s)
Toudou Wada	3.518183	12.034861	CH	E 125 m	42	-0.06	-	-	-	-	-	-	-	26	0.8
Baro_GF01	3.523093	12.049319	Q/P/CH	E 50 m	24	0.21	32	2	11	2	2	$\leq 10^{-6}$	4	32	0.4
Baro_Q1	3.527482	12.052118	Q/P/CH	E 100 m	21	-0.4	30	2	11	2	2	$\leq 10^{-6}$	6	35	0.4
Baro_Q2	3.533831	12.053284	Q/P/CH	E 100 m	20	-0.51	23	1.5	9	1.4	2	$\leq 10^{-6}$	6	30	0.3
Baro_Q3	3.541253	12.052517	Q/P/CH	E 100 m	10	-1.41	18	0.9	8	0.7	2	$\leq 10^{-6}$	6	32	0.5
Bana_GF02	3.544254	12.054242	Q/P/CH	E 100 m	10	-0.9	19	1	7	0.7	3	$\leq 10^{-6}$	7	29	0.4
Bengou P26	3.559065	11.980012	Q/CH	E 50 m	22	0.47	30	1.5	7	1	-	-	-	26	1
Bengou_Q1	3.565937	11.983333	Q/CH	E 100 m	19	0.46	34	0.7	16	1	-	-	-	20	0.2
Bengou P23	3.572120	11.979304	Q/CH	E 50 m	14	-0.07	38	2	18	3.6	-	-	-	20	2
Bengou_GF01	3.582884	11.980524	Q/CH	S 75 m	10	-0.67	35	0.8	19	1.5	-	-	-	22	0.8
Bengou_Q2	3.587077	11.982084	Q/CH	E 75 m	8	-1.2	34	0.7	17	1	-	-	-	19	0.2
Bengou_CEG	3.591489	11.980006	CH	E 100 m	9	1.56	-	-	-	-	-	-	-	23	0.1
Sabon Birni	3.604858	11.87207	Q/CH	E 50 m	7	-0.36	34	0.8	10	0.8	-	-	-	9	0.01
Toun_CT_CH-1	3.610111	11.797124	CH	S 150 m	33	0.12	-	-	-	-	-	-	-	10	0.08
Toun_CT/CH-2	3.651577	11.809453	CH	S 150 m	10	0.43	-	-	-	-	-	-	-	11	0.08
Toun_Q1	3.631106	11.805919	Q/CH	E 100 m	10	0.02	23	3	7	2	-	-	-	3	0.01
Toun_GF01	3.636271	11.805167	Q/CH	S 75 m	9	0.27	18	2	10	2	-	-	-	4	0.06
Toun_Q2	3.645356	11.805219	Q/CH	S 75 m	6	0.48	19	0.6	9	0.5	-	-	-	7	0.06
Toun_GF02	3.645874	11.804921	Q/CH	S 75 m	8	0.29	33	2	11	2	-	-	-	14	0.05
Toun_Q3	3.620080	11.800585	Q/CH	E 50 m	16	-0.59	26	2	10	2	-	-	-	15	0.3
Toun_CT_CH-3	3.654995	11.809747	CH	E 50 m	10	-0.35	-	-	-	-	-	-	-	9	0.02

CH Continental Hamadien; Q Quaternary; P Paleocene; E Eight; S Square; S/N signal/noise; θ_{MRS} MRS water content; K_{MRS} MRS hydraulic conductivity; Δz thickness of the saturated aquifer; T_{MRS} MRS transmissivity. K_{MRS} and T_{MRS} were estimated using the parametric factor ($C_P = 1.4 \times 10^{-8}$) (Boucher et al., 2009a)

4 Results

4.1 Interpretation procedure for TDEM and MRS soundings

Figures 4 and 5 show detailed descriptions of lithological logs with evidence from MRS and TDEM experiments for Bengou I borehole and Sabon Birni piezometer, respectively. Evidence from Bengou I borehole (Fig. 4) shows a succession of four layers of varying resistivity that include two aquifer formations. The first (shallowest) layer (ρ (real resistivity) = 60 to 70 $\Omega \cdot m$) with a thickness of 15 m and effective porosity of 30% corresponds to unconsolidated Quaternary sediments in the lithological log. The second, more resistant layer ($\rho = 200$ to 240 $\Omega \cdot m$) with a thickness of 30 m and effective porosity of 25%, corresponds on the lithological log to the fine to coarse sands of CH. The third, more conductive layer ($\rho = 13$ to 20 $\Omega \cdot m$) over a thickness of 14 m, corresponds to fine clayey sandstones of the CH. The fourth layer ($\rho = 150$ to 200 $\Omega \cdot m$) encountered beyond a depth of 60 m, corresponds to the alternations of hard and soft sandstones of the CH as suggested by the lithological the log. At Sabon Birni (Fig. 5), soundings reveal a succession of three layers of variable resistivity. The first (shallowest) layer ($\rho = 90$ to 137 $\Omega \cdot m$) with a thickness of 10 m and effective porosity of 34 % corresponds to Quaternary sands. The second layer ($\rho = 30$ to 50 $\Omega \cdot m$) has a thickness of 20 m below a depth of 10 m and corresponds to fine to medium clayey sands of the CH. The third layer ($\rho = 2$ to 3 $\Omega \cdot m$) strating at a depth of 30 m is associated with clayey sandstones of CH.

The interpretation of soundings from these two sites enabled the calibration of inversion of the TDEM and MRS soundings of the lower valley of the Dallol Maouri. It emerges from this interpretation that Quaternary sands have a resistivity that varies between 60 and 130 $\Omega \cdot m$ from Bengou to Tounouga. The predominantly hard sandstones of CH exhibit a resistivity greater than 200 $\Omega \cdot m$ whereas clayey sandstone formations of the Bana-Bengou sector have a resistivity close to 15 $\Omega \cdot m$. The very fine clayey sandstones of the Sabon Birni-Tounouga sector reveal a very low resistivity around 3 $\Omega \cdot m$.

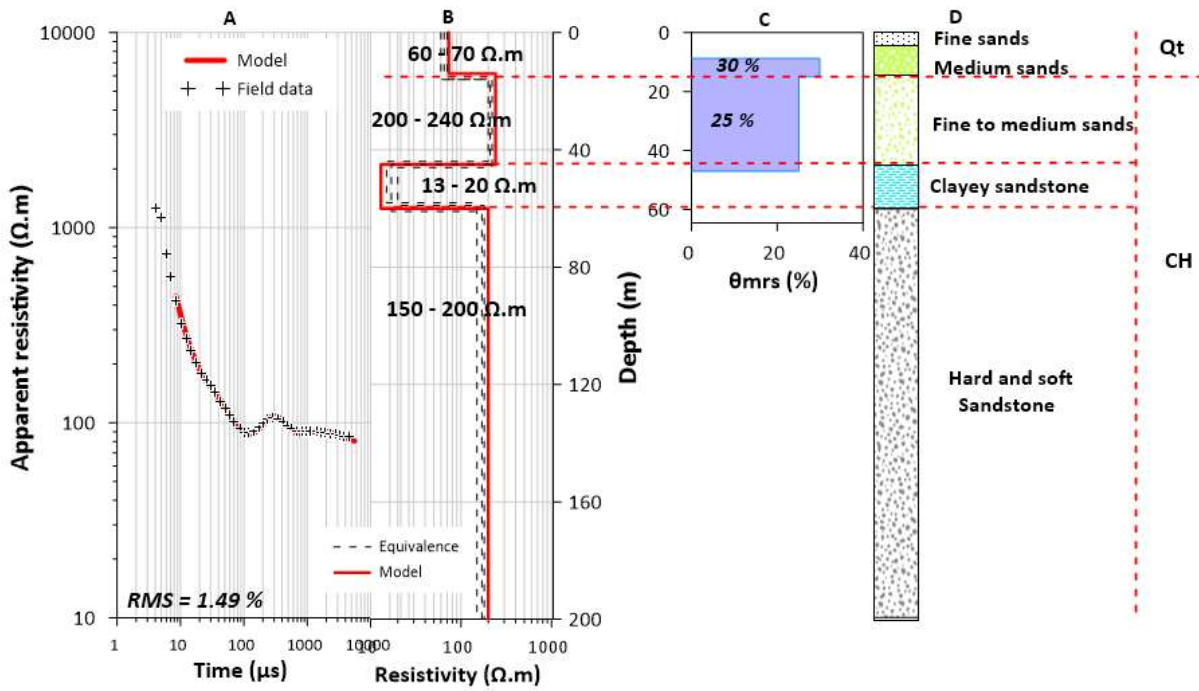


Fig. 4 Interpretation procedure for TDEM and MRS soundings, example of soundings around Bengou I borehole, Bengou cross-section. A : TDEM raw data and the inversion model, B : TDEM results best model and equivalences, MRS results D : geological log of Bengou I borehole


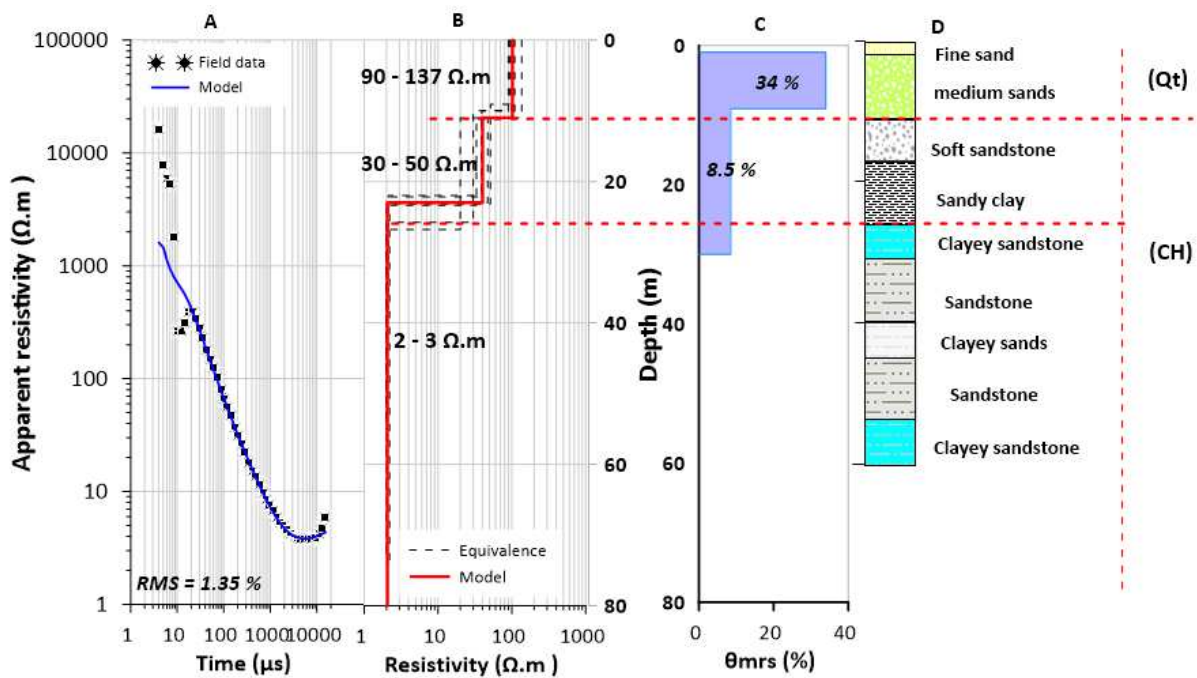


Fig. 5 Interpretation procedure for TDEM and MRS soundings, example of soundings around Sabon Birni piezometer. A : TDEM raw data and inversion model, B : TDEM results, best model and equivalences, C : MRS results, D : geological log of Sabon Birni piezometer


4.2 Characterization of the geometry of aquifers

The inversion results of TDEM and MRS soundings carried out in the lower valley of the Dallol Maouri show two aquifer layers with different characteristics depending on the transect. The first (shallowest) aquifer layer is generalized across the entire valley and characterized by resistivities ranging from 25 to 40 $\Omega\cdot\text{m}$ at Bana (Fig. 6a), 60 to 70 $\Omega\cdot\text{m}$ at Bengou (Fig. 6b), and 90 to 120 $\Omega\cdot\text{m}$ at Tounouga (Fig. 6c). Average thicknesses over these three transects range from 11 to 18 m (Fig. 6d). The associated evidence from MRS reveals mean effective porosities that vary from 25% (range: 20 to 35%) at Bana to 33% (range: 30 to 38%) at Bengou, and 20% (range: 17 and 26%) at Tounouga transect (Table 1).


The second shallowest aquifer layer is better represented in the Bana to Bengou sectors relative to the Tounouga sector. It is characterized by resistivities ranging from 60 to 150 $\Omega\cdot\text{m}$ at Bana (Fig. 6a) and 200 to 220 $\Omega\cdot\text{m}$ at Bengou (Fig. 6b). Average thickness over these two transects is 30 m. From Sabon Birni village to Tounouga, this aquifer layer has a resistivity of 30 to 40 $\Omega\cdot\text{m}$, and an average thickness of 20 m. The associated evidence from MRS reveals means effective porosities ranging from 25 to 33 % in at Bana-Bengou sector, and from 3 to 15 % from Sabon Birni village to Tounouga sector. A highly conductive formation (5 to 7 $\Omega\cdot\text{m}$), and very low effective porosity (2 to 3%), with an average thickness of 5 m, separates the first two shallowest aquifers layers on the Bana transect.

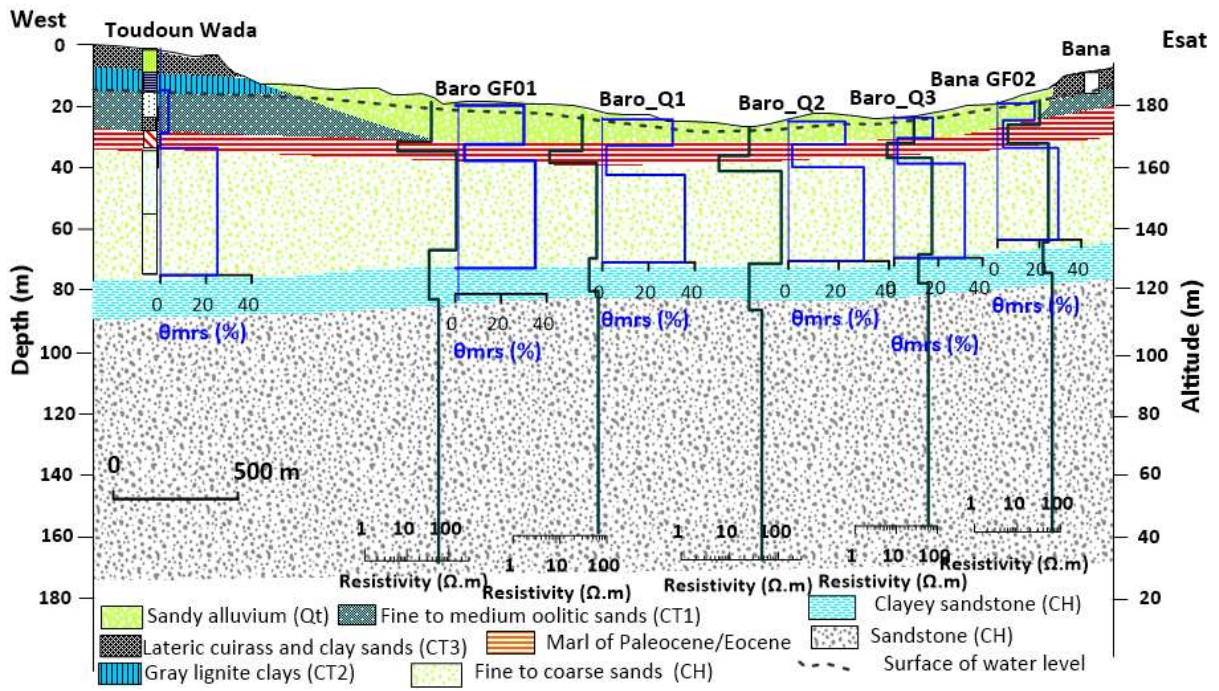


(a)

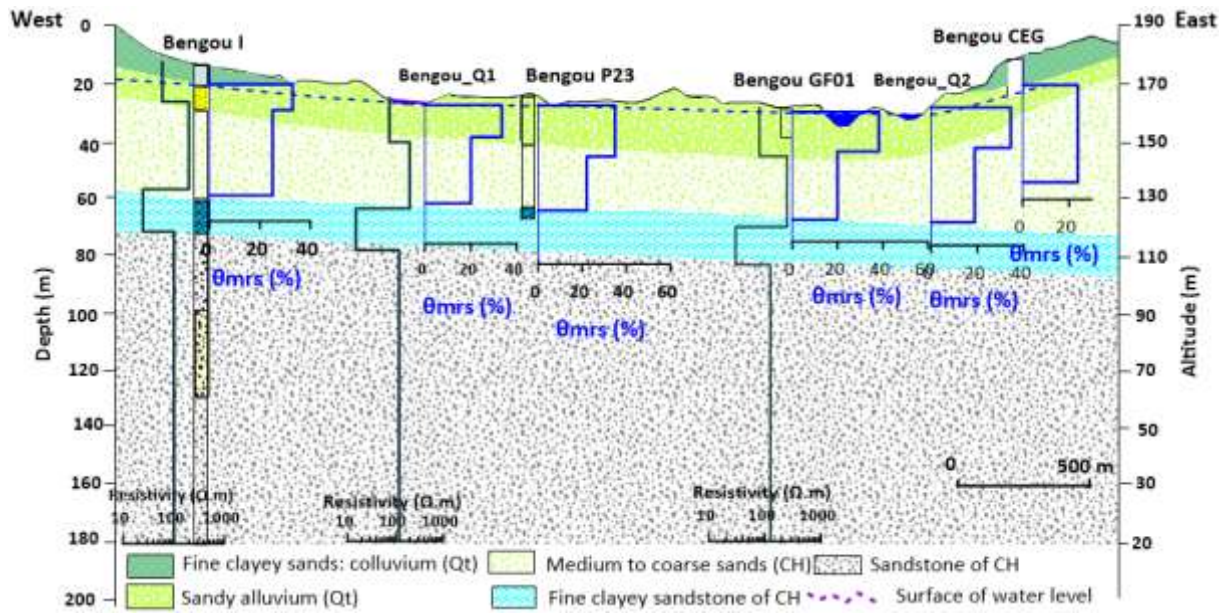

(b)

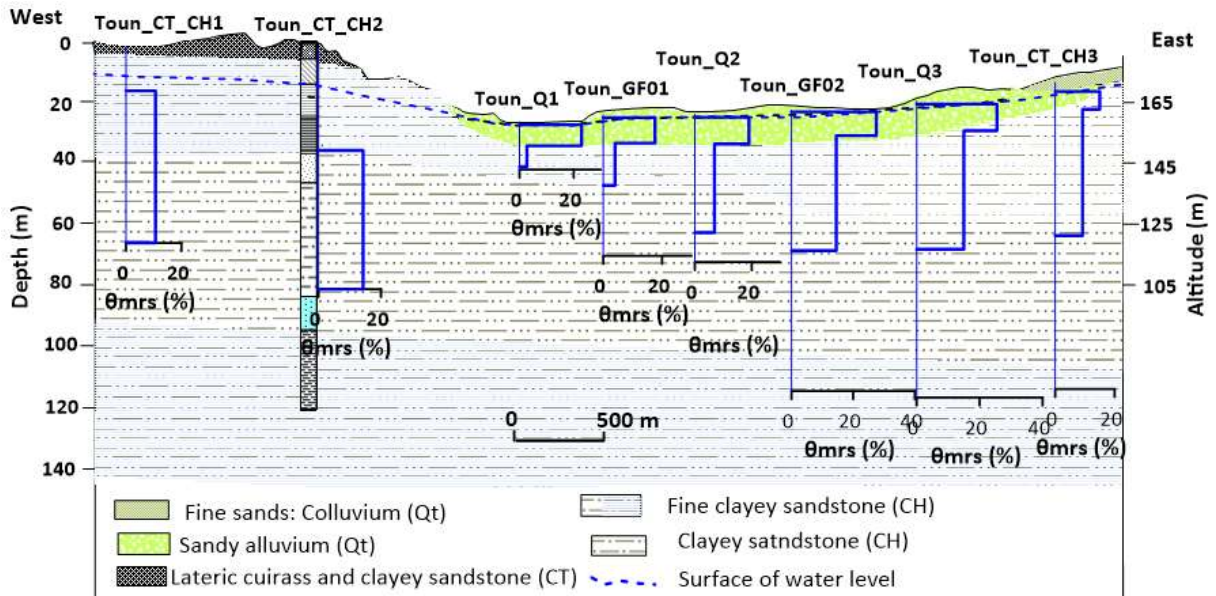

(c)

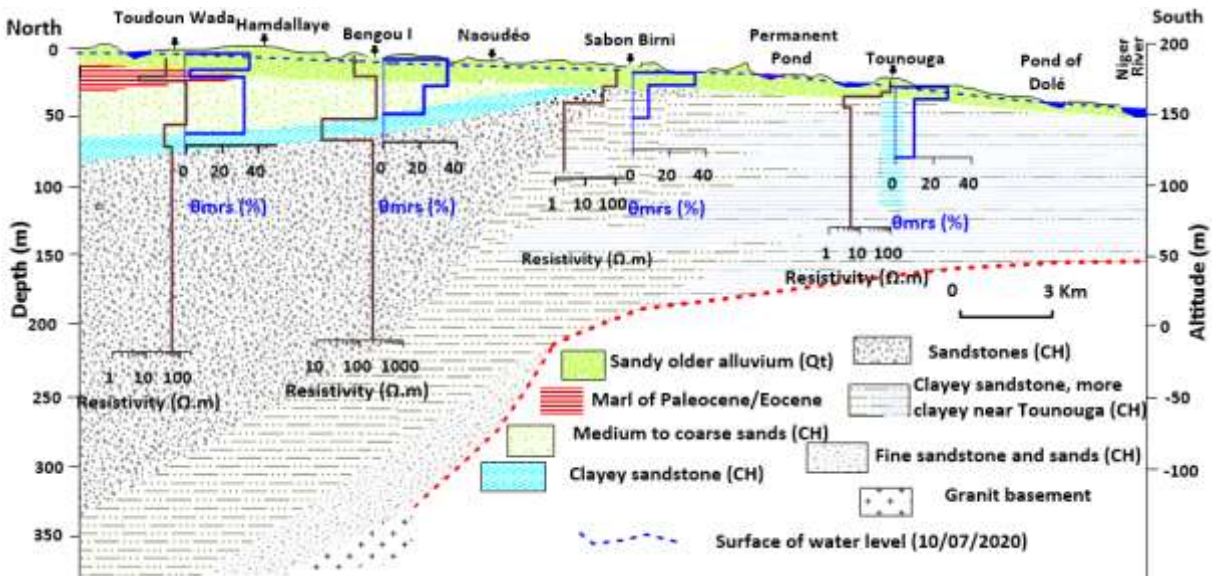

(d)

Fig. 6 Distribution of the water content and resistivity correlated to the geological formation (a) on the Bana transect, (b) on the Bengou transect, (c) on the Tounouga transect, (d) along the longitudinal axis of the valley.

4.3 Estimation of hydrodynamic parameters from MRS

The hydraulic conductivity (K) of Quaternary sands in the paleochannel ranges from 9×10^{-4} to 2×10^{-3} m/s with a geometric mean value of $1.4 \pm 0.1 \times 10^{-3}$ m/s at Bana transect, 7.4×10^{-4} to 2×10^{-3} m/s with a geometric mean value of $1 \pm 0.1 \times 10^{-3}$ m/s at Bengou transect, and 6×10^{-4} to 2×10^{-3} m/s with a geometric mean of $9 \pm 0.2 \times 10^{-4}$ m/s at Tounouga transect (Table 1). The value of transmissivity ranges from 2×10^{-3} to 4×10^{-2} m²/s with a geometric mean of 1.5×10^{-2} m²/s. In the medium to coarse sand and Continental Hamadien sandstone formations, hydraulic conductivities vary from 10^{-4} to 2×10^{-3} m/s with a geometric mean of 6×10^{-4} m/s in the Bana – Bengou sector. In the clayey sandstones from Sabon Birni to Tounouga sector, hydraulic conductivities vary from 3×10^{-5} to 10^{-4} m/s with a geometric mean of 5×10^{-5} m/s. Geometric mean transmissivity is 2×10^{-2} m²/s in the Bana-Bengou sector and 2×10^{-3} m²/s in the clayey sandstones encountered from Sabon Birni village to Tounouga sector.

5 Discussions

5.1 Integration of geological and geophysical data to delineate paleochannel architecture

The shallowest aquifer layer with a high effective porosity (18 to 38%), identified across the entire valley, is correlated to Quaternary alluvial sands. The range of resistivity values given by the TDEM soundings (60 to 70 $\Omega \cdot m$) in the Bengou sector is comparable to that (88 $\Omega \cdot m$) found by Abdou Ali (2018) using Vertical Electrical Soundings (VES). The conductive layer with resistivity values of 5 to 7 $\Omega \cdot m$ revealed by soundings of the Bana transect corresponds to the marl-limestone, a marine formation of the Paleocene-Eocene encountered in a borehole of Toudoun Wada (Conseil de l'Entente 1998) and located on the plateau 1.5 km from the sounding site. This formation has also been identified by VES with resistivity values of 5 $\Omega \cdot m$, (CGG 1968) and a range of values from 2 to 60 $\Omega \cdot m$ (Abdou Ali 2018). The second shallowest aquifer layer with effective porosities ranging from 20 to 35 % in the Bana-Bengou sector corresponds to the fine to coarse sands encountered by the Bengou I borehole (Fig. 4) between 19 and 45 m deep (FAO 1970). From Sabon Birni village to Tounouga sector, the more conductive layer revealed by the TDEM soundings corresponds to the soft clayey sandstone and sandstone clay formations (effective porosities ranging from 3 to 15%) encountered by the Sabon Birni piezometer (FAO 1970) and the Tounouga borehole (Conseil de l'Entente 1998).

Hydrodynamic parameters determined by MRS compare favourably with data obtained by pumping tests in the area (FAO 1970) and MRS soundings carried out in Niger (Boucher et al. 2009a; Descloitres et al. 2013 ; Vouillamoz et al. 2008), as well as the results of hydrogeological modeling (Guéro 2003). Values of hydraulic conductivity that vary from 3×10^{-4} to 2×10^{-3} m/s (geometric mean : 10^{-3} m/s) in the alluvial sands are consistent with those found by Descloitres et al. 2013, in the Quaternary deposit of the Komadouga valley, and the unconfined aquifer of the Continental Terminal (Boucher et al. 2009a). Estimated transmissivities vary from 2×10^{-3} to 3×10^{-2} m²/s (geometric mean: 1.5×10^{-2} m²/s) are similar to that found in the sandy alluvium of Kizamou (1.4×10^{-2} m²/s) by Boucher et al. (2009a). In the sands and sandstones of the Continental Hamadien, the average geometric of K revealed by MRS (5×10^{-4} m/s) is very close to that obtained by pumping tests in the aquifers of the Continental Hamadien (6.5×10^{-4} m/s) throughout the Dallol Maouri (FAO 1970). K values of around 10^{-5} m/s on the plateau of the Tounouga sector are consistent with those derived by hydrogeological modeling (Guéro 2003).

5.2 Estimation of groundwater flow

Groundwater flow within Quaternary sand formations of the lower valley of the Dallol Maouri is shown schematically in Fig. 7. Longitudinal variations in the hydraulic head along the paleochannel reveal a change in hydraulic gradient between Bana and Bengou compared to that between Bengou and Tounouga (Fig. 8). Estimated hydraulic gradients, hydraulic conductivities deduced from MRS soundings, cross-sectional areas, and Darcy fluxes are summarized in Table 2.

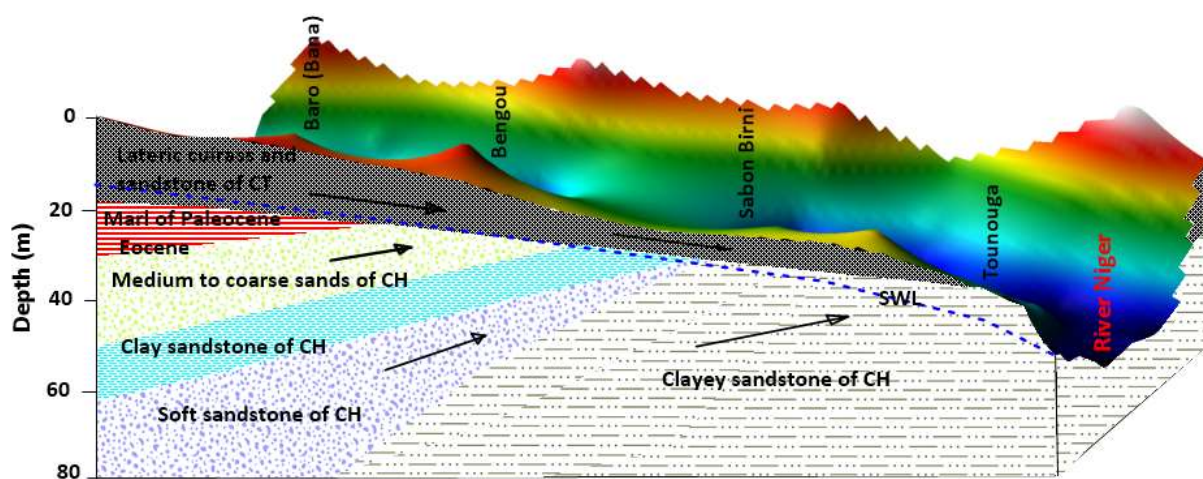


Fig. 7 Conceptual model of groundwater discharge in Quaternary alluvial formations of the lower valley of the Dallol Maouri


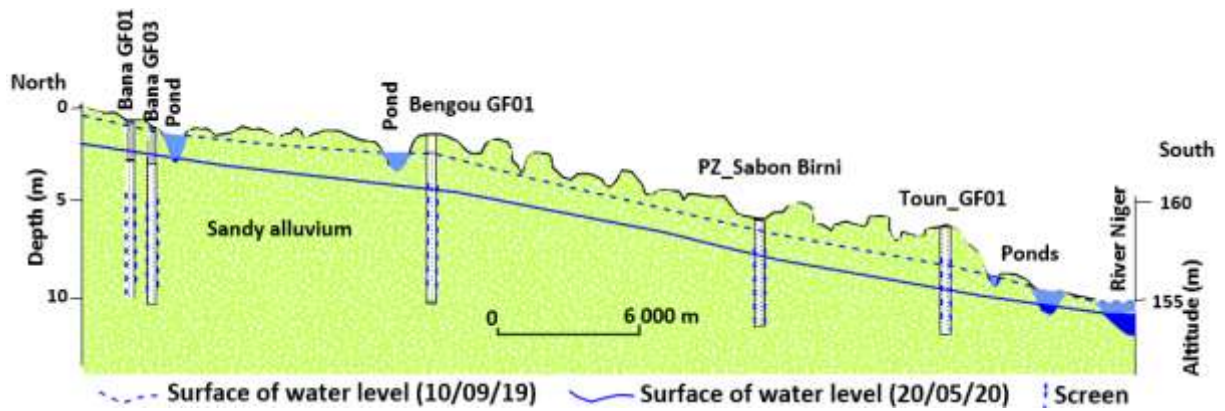


Fig. 8 Longitudinal variations in hydraulic head of the unconfined aquifer of Quaternary alluvium along the paleodrainage channel of the Dallol Maouri


Table 2 : Groundwater discharge and its velocity in the Quaternary alluvium evaluated at the three (3) cross-sections investigated

Section	Sub-section	Hydraulic gradient	Distance/River (km)	Hydraulic conductivity (10^{-3} m/s)	Area (m^2)	Groundwater flow (m^3/day)	Velocity (cm/day)
Bana	1	0,0002	40	2	10 000	400	50
	2			2	9 000	350	
	3			1.5	6 000	200	
	4			0.9	5 000	100	
	5			1	5 000	100	
Total					35 000	1 200	
Bengou	1	0,0002	30	1.5	5 600	150	75
	2			0.7	6 400	100	
	3			2	14 000	500	
	4			0.8	15 000	200	
	5			0.7	10 200	100	
Total					45 000	1 000	
Tounouga	1	0,0003	10	0.3	3 000	100	80
	2			2	6 000	400	
	3			0.6	4 000	100	
	4			2	8 000	450	
	5			2	14 000	700	
Total					40 000	2 000	


Groundwater flow calculated by Darcy’s Law for the cross-section at Bana (Fig. 9a), located 40 km from the River Niger with an hydraulic gradient of 0.2 ‰, is estimated to 1,200 m³/day or $\sim 4.5 \times 10^5$ m³/year. The value calculated for the Bengou cross-section (Fig. 9b) is 1000 m³/day, or $\sim 4 \times 10^5$ m³/year whereas that calculated for the cross-section at Tounouga, which is located 10 km from the River with an hydraulic gradient of 0.3 ‰ (Fig. 9c), is 2000 m³/day or $\sim 7 \times 10^5$ m³/year. The average linear velocity of groundwater is 50 cm/day at the Bana section, 75 cm/day at the Bengou section, and 80 cm/day at Tounouga. Upstream, groundwater discharge at Bana ($1,200 \pm 60$ m³/day) exceeds that computed mid-stream at Bengou ($1,000 \pm 90$ m³/day). The difference observed between these two discharges may derive from uncertainty in parameters (K, i, cross-sectional area) that inform these calculations. Downstream discharge at Tounouga records a greater flow ($2,000 \pm 250$ m³/day), due to the change in the hydraulic gradient and especially to the contribution of the regional aquifer (converging flow) to the valley for the Tounouga section. The groundwater discharges computed at the Dallol Maouri paleochannel are comparable to the groundwater discharges quantified at the Gillingarra paleochannel and at Heihe River in the drylands of Australia and China respectively (Speed & Killen 2020 ; Yao et al. 2017).

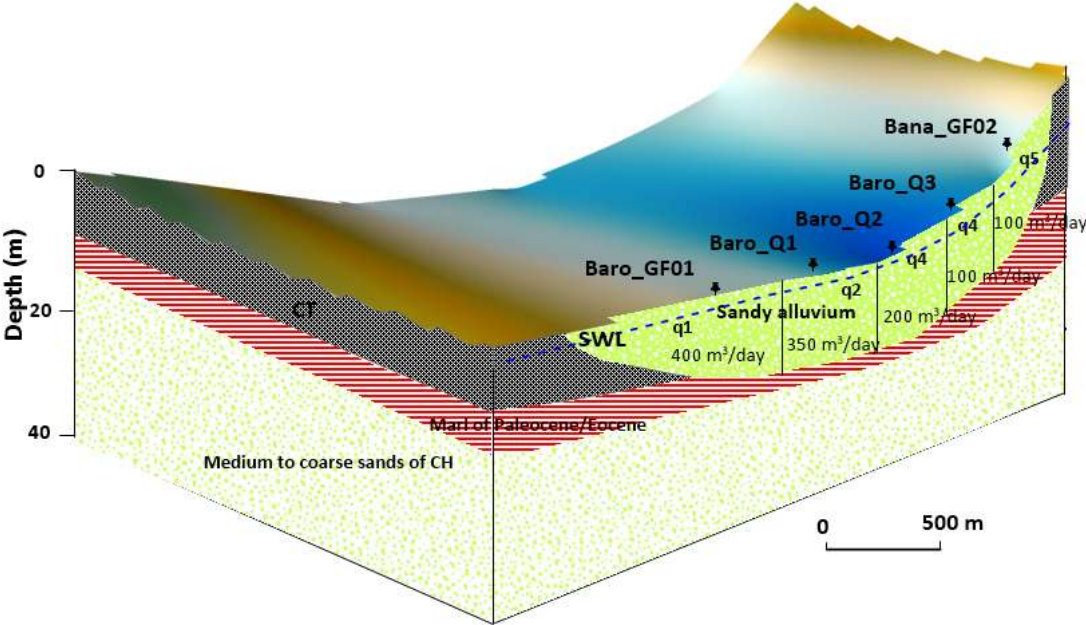

(a)

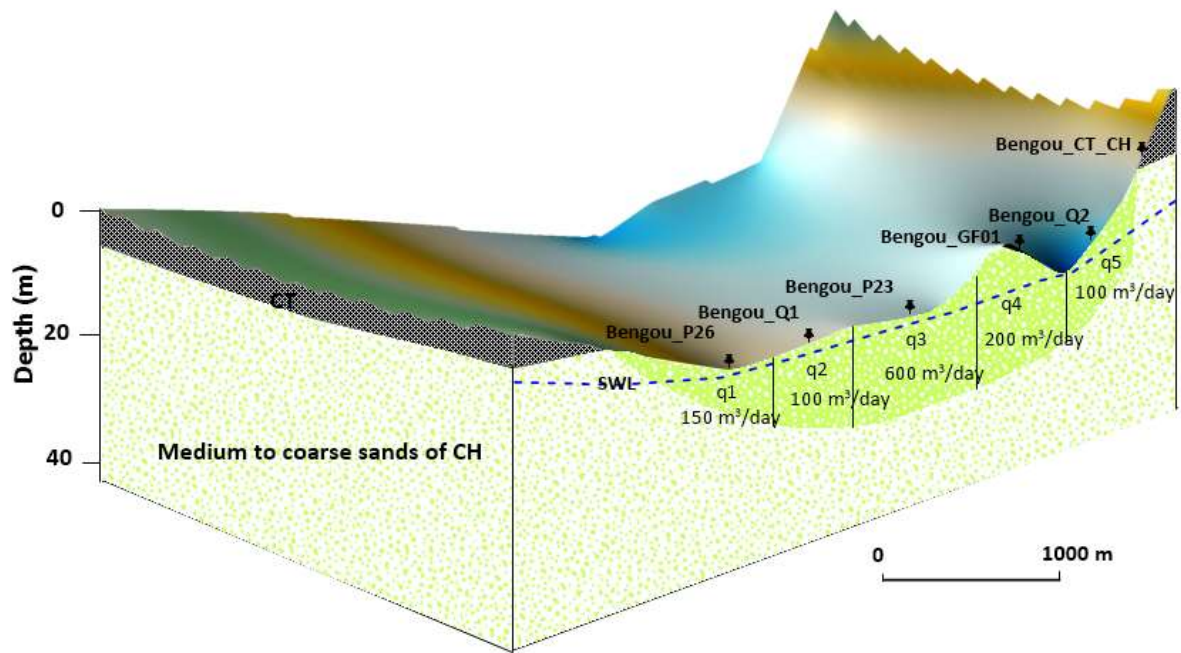

(b)

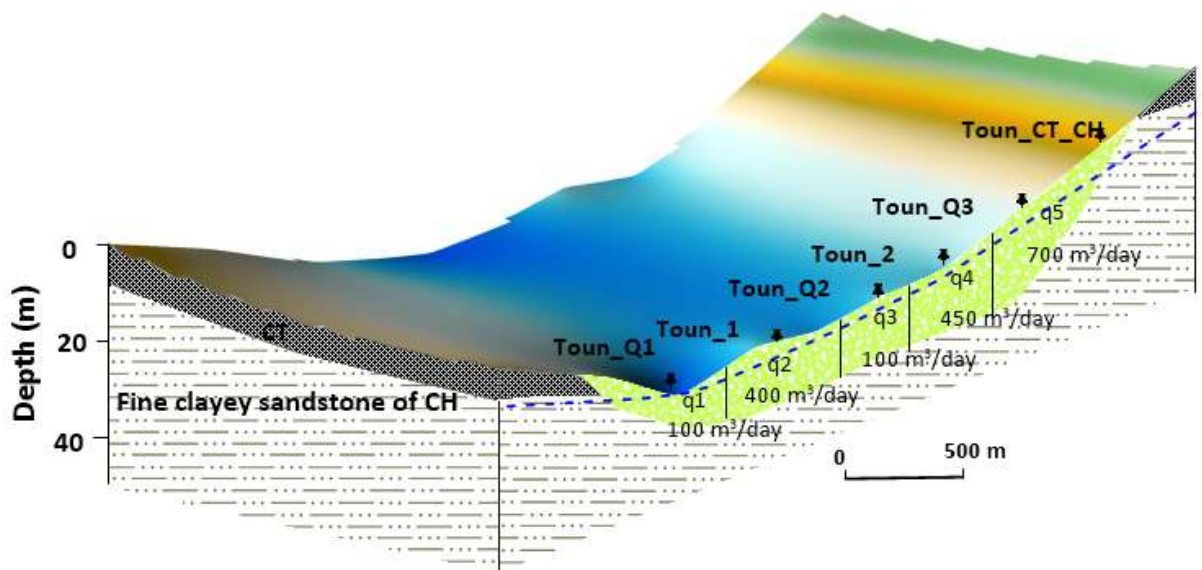

(c)

Fig. 9 Groundwater discharge quantification (a) Bana section, (b) Bengou section, (c) Tounouga. The q1, q2, q3, q4 and q5 are the groundwater amounts through the sub-sections delimited according to geophysical investigation

5.3 Paleochannel discharge in the Niger Basin

Groundwater discharge of 2000 m³/day (0.02 m³/s) quantified during the dry season at the most downstream station of the lower valley of the Dallol Maouri, constitutes an environmental flow contributing to the flow of the River Niger during low-flow periods. The average flow of the River Niger during the period of low flow (in May, 1971-2019) at the gauging station in Niamey is 22 m³/s though exceptional low flows have occurred during the Sahelian drought with no flow recorded from June 16 to 22, 1986.

Due to the low productivity of rainfed crops, communities in the lower valley of the Dallol Maouri are moving towards the use of groundwater for irrigation. Maintaining the environmental flow of the River Niger is governed by Annex 1 of the Niger Basin Water Charter relating to environmental protection in its "Article 95". The latter stipulates that: "The States Parties undertake, within the framework of the qualitative and quantitative protection of water resources, to preserve an environmental flow in the rivers of the basin to ensure the life of the aquatic ecosystems and to maintain the services and goods they provide to populations "(ABN 2011). This environmental flow must be preserved and is defined in Article 6 of Annex 2 of the Niger Basin Water Charter (ABN 2019). Article 4 of the Water Code of Niger Republic enshrines the right of everyone to have water corresponding to the satisfaction of their personal and domestic needs. But these assets are subject to certain provisions underlined by article 47 of this code, which stipulates that all activities likely to reduce water resources, or to substantially modify the level, the flow mode or the regime of water, damaging the biodiversity of aquatic ecosystems, are subject to a declaration. The authorization lays down, as necessary, the requirements imposed with a view to eliminating, reducing or compensating for dangers or negative effects on water and aquatic ecosystems.

The study area has significant potential for irrigable land (Guéro 2003; Cochand 2007 ; CEIPI 2011). Despite this significant land potential for irrigation in the study area, only a few individual plots are sporadically developed throughout the valley. With the Government of Niger's new "3N" initiative that emphasizes the use of groundwater for irrigation, the areas of Dallol Maouri are one of the potential targets for ensuring food self-sufficiency. To await the latter, Niger needs major agricultural developments in the large valleys such as that of Dallol Maouri. This large-scale achievement could be

compromised by a provision of the Niger Basin Water Charter which calls to guarantee an environmental flow that contributes to the flow rate of the River Niger during the low flow period.

6 Conclusion

Surface geophysical investigations applying TDEM (Time Domain ElectroMagnetic) and (Magnetic Resonance Soundings) have assessed lithological variations and estimated groundwater flow within the paleochannel in the lower valley of the Dallol Maouri of southern Niger, which discharges to the River Niger. TDEM soundings distinguish CH clay formations in the Tounouga transect and the Paleocene-Eocene marl formation in the Bana transect. The thickness of Quaternary alluvial sediments of the valley was also estimated, and varies between 10 to 20 m at the three analysed transects. MRS reveals substantial groundwater storage in the Quaternary alluvium with effective porosities ranging from 20 to 38 % over the entire valley; hydraulic conductivities range from 9×10^{-4} to 1.4×10^{-3} m/s. The clayey sandstone formations of the Tounouga sector reveal a lower water content compared to the medium to coarse sand and soft sandstone formations of the Bana-Bengou transects. Groundwater flow estimated from Darcy's Law at the Bana cross-section is 4.5×10^5 m³/year, 4×10^5 m³/year at Bengou cross-section, and 7×10^5 m³/year at the cross-section of Tounouga. The latter groundwater discharge draining the lower valley of Dallol Maouri contributes to the flow of the River Niger, that increases in importance during dry periods. Groundwater flowing through fine to coarse sands of the Continental Hamadian is also considered a potential resource to enable irrigation, especially in the Bana area where the Paleocene-Eocene marine formation separates this formation from the Quaternary alluvium.

Acknowledgements

This study was conducted with the support of grants under the *GroFutures* (www.grofutures.org) project (refs. NE/M008576/1, NE/M008932/1) from the UK government's NERC-ESRC-DFID UPGro programme. We would also like to thank « l'Institut de Géosciences et de l'Environnement (IGE) » for lending us the NUMIS Lite to supplement our soundings. Thanks also go to Mr. Issa Taweye (IRD Staff, Niamey for his assistance in the field).

Declarations

Conflict of interest All authors certify that, they have no conflict of interest.

References

Abdou Ali (2018) *Caractérisation des réservoirs aquifères multicouches du bassin des Iullemeden dans la région de Dosso (Sud-Ouest du Niger) : Apport de la télédétection, du SIG, de la géophysique et de l'hydrogéochimie, Thèse de doctorat de l'Université Abdou Moumouni de Niamey, 310p.*

ABN (2011) Annexe°1 à la charte de l'eau du bassin du Niger relative à la protection de l'environnement. *Rapport de réunion des gouvernements de pays membres de l'Autorité du Bassin du Niger (ABN), 74pp.*

ABN (2019) Annexe°2 à la charte de l'eau du bassin du Niger relative au règlement d'eau pour la gestion coordonnée des barrages constituants. *Rapport de réunion des gouvernements de pays membres de l'Autorité du Bassin du Niger (ABN), 17pp.*

Armand C (1987) *Actualisation de l'Atlas des eaux souterraines du Niger, Rapport BRGM 87 NER 108 EAU ; 148p.*

Berthou S, Kendon EJ, Rowell DP, Roberts MJ, Tucker S, & Stratton R (2019) Larger Future Intensification of Rainfall in the West African Sahel in a Convection-Permitting Model. *Geophysical Research Letters, 46(22), 13299-13307. doi:10.1029/2019gl83544*

BGR/ABN (2019) Geological map of the transboundary region Benin, Niger and Nigeria. Sedimentary basins: Southern Iullemeden, Kandi and Sokoto. *Technical rapport N°5, 148pp.*

Boucher M (2007) *Estimation des propriétés hydrodynamiques des aquifères par Résonance Magnétique des Protons dans différents contextes géologiques, de l'échantillon à l'échelle hydrogéologique, Thèse de doctorat de l'Université d'Orléans ; 199p*

Boucher M, Favreau G, Vouillamoz JM, Nazoumou Y, & Legchenko A (2009a) Estimating specific

- yield and transmissivity with magnetic resonance sounding in an unconfined sandstone aquifer (Niger). *Hydrogeology Journal*, 17(7), 1805–1815. <https://doi.org/10.1007/s10040-009-0447-x>
- Boucher M, Favreau G, & Descloitres M (2009b) *Contribution of geophysical surveys to groundwater modelling of a porous aquifer in semiarid Niger : An overview. Comptes Rendus Geoscience*, 341, 800–809. <https://doi.org/10.1016/j.crte.2009.07.008>
- Boucher M, Favreau G, Nazoumou Y, Cappelaere B, Massuel S, & Legchenko A (2012) Constraining Groundwater Modeling with Magnetic Resonance Soundings. *Ground Water*, 50(5), 775–784. <https://doi.org/10.1111/j.1745-6584.2011.00891.x>
- CEIPI (2011) Projets et Programmes de développement de l’irrigation au Niger (1960-2010) : Eléments pour un bilan, *p115*
- CGG (1968) Projet de mise en valeur du Dallol Maouri : Prospection géophysique par sondages électriques, *Rapport final*, 22p
- Chalikakis K M (2006) *Application de méthodes géophysiques pour la reconnaissance et la protection de ressources en eau dans les milieux karstiques, Thèse de doctorat de l’Université Paris 6 ; 223p*
- Chalikakis K, Nielsen M R, & Legchenko A (2008) MRS applicability for a study of glacial sedimentary aquifers in Central Jutland, Denmark. *Journal of Applied Geophysics*, 66(3–4), 176–187. <https://doi.org/10.1016/j.jappgeo.2007.11.005>
- Cochand J (2007) La petite irrigation privée dans le sud Niger: potentiels et contraintes d'une dynamique locale, Le cas du sud du département de Gaya, *mémoire de maîtrise de l’Université de Lausanne*, 149pp.
- Conseil de l'Entente (1998) Campagne de réalisation des 1000 forages au Niger: Logs lithologiques des forages.
- Cuthbert M O, Acworth R I, Andersen M S, Larsen J R, McCallum A M, Rau G C, & Tellam J H, (2016)

Understanding and quantifying focused, indirect groundwater recharge from ephemeral streams using water table fluctuations, *Water Resour. Res.*, 52, 827-840, doi:10.1002/201SWR017503

Cuthbert M O, Taylor R G, Favreau G *et al.* (2019) Observed controls on resilience of groundwater to climate variability in sub-Saharan Africa. *Nature* **572**, 230–234. <https://doi.org/10.1038/s41586-019-1441-7>

D'ordorico P, and Bhattachan A (2012) *Review*. Hydrologic variability in dryland regions: impacts on ecosystem dynamics food security, *Phil. Trans. R. Soc. B* (2012) 367, 3145-3157, doi:10.1098/rstb.2012.0016

Dambo L (2007) *Usages de l ' eau à Gaya (Niger) : entre fortes potentialités et contraintes majeures Usages de l ' eau à Gaya (Niger) : entre fortes potentialités et contraintes majeures, thèse de doctorat à l'université de Lausanne ; 424p.*

Davies J, Barchiesi S, Ogali C J, Welling R, Dalton J, and Laban P (2016) Water in drylands: Adapting to scarcity through integrated management. *Gland, Switzerland: IUCN, ISBN: 978-2-8317-1803-3*, <http://dx.doi.org/10.2305/IUCN.CH.2016.06>

DeGraaf I E M, Gleeson T, Rens ven Beek L P H, Sutanudjaja E H, & Bierkens M F P (2019) Environmental flow limits to global groundwater pumping, *92 /NATURE/VOL574/3 OCTOBER 2019*, <https://doi.org/10.1038/s41586-019-1594-4>

Descloitres M, Chalikakis K, Legchenko A, Moussa A M, Genthon P, Favreau G, Le Coz M, Boucher M, & Oï M (2013) Investigation of groundwater resources in the Komadugu Yobe Valley (Lake Chad Basin, Niger) using MRS and TDEM methods. *Journal of African Earth Sciences*, 87, 71–85. <https://doi.org/10.1016/j.jafrearsci.2013.07.006>

Descloitres M (1998) *Les sondages électromagnétiques en domaine temporel (TDEM): Application à la prospection d'aquifères sur les volcans de Fogo (cap vert) et du Piton de la Fournaise (la Réunion). Thèse de doctorat de l'Université Paris 6 ; 256p.*

- FAO (1970) Etude en vue de la mise en valeur des dallols Bosso et Maouri : Les eaux souterraines, *rapport final, 98pp plus annexes*
- Favreau G (2000) Caractérisation et modélisation d'une nappe phréatique en hausse au Sahel : dynamique et géochimie de la dépression piézométrique naturelle du kori de Dantiandou (sud-ouest du Niger). *Th. : Sci. de La Terre, Université Paris-Sud 11 : Orsay*, 348
- Favreau G, Cappelaere B, Massuel S, Leblanc M, Boucher M, Boulain N, and Leduc C (2009) Land clearing, climate variability, and water resources increase in semiarid southwest Niger: A review, *Water Resour. Res.*, 45, W00A16, [doi:10.1029/2007WR006785](https://doi.org/10.1029/2007WR006785)
- Favreau V, Nazoumou Y, Leblanc M, Guéro A, Goni I B, (2012) Groundwater resources increase in the Iullemeden Basin, West Africa. *In Climate Change Effects on Groundwater Resources: A Global Synthesis of Findings and Recommendations (Pp. 113-128). CRC Press*
- Favreau G, Leduc C, (1998) Fluctuations à long terme de la nappe phréatique du Continental Terminal près de Niamey (Niger) entre 1956 à 1997. *Water Ressources Variability in Africa during the XXJh CenJury (Proceedings of the Abidjan '98 Conference 253 held at Abidjan Côte d'Ivoire, Novembre 1998). IAHS Publ. no. 252, 1998*
- Favreau G, Leduc C, Schroeter P, (2002) Replay to comment 'Long-terme rise in the Sahelian water-table : the Continental Terminal in South-West Niger' by Leduc, C., Favreau, G., Schroeter, P., 2001. *Journal of Hydrology*, 243, 43-54. *Journal of Hydrology* 255 (2002) 263-265. *PII:S0022-1694(01)00517-0*
- Fitterman D V, & Stewart M T (1986) Transient electromagnetic sounding for groundwater. *Geophysics*, 51(4), 995–1005. <https://doi.org/10.1190/1.1442158>
- Gaoh A D (1993) *Etude des nappes aquifères du Continental Terminal entre les dallols Bosso et Maouri, Département de Dosso, République du Niger, thèse de doctorat à l'université de Liège ; 316p.*

- Gavaud M (1977) *Les grands traits de la pédogénèse au Niger Méridional. Paris, rapport ORSTOM N°76 ; 106p.*
- Goldman M, Rabinovich B, Rabinovich M, Gilad D, Gev I, & Schirov M (1994) Application of the integrated NMR-TDEM method in groundwater exploration in Israel. *Journal of Applied Geophysics*, 31(1–4), 27–52. [https://doi.org/10.1016/0926-9851\(94\)90045-0](https://doi.org/10.1016/0926-9851(94)90045-0)
- Greigert J (1957) *Introduction à la connaissance hydrogéologique du bassin occidental du Niger. Rapport de fin de campagne 1955-1956 : troisième partie ; 55p.*
- Greigert J (1966) *Description des formations crétacées et tertiaires du bassin des Iullemeden (Afrique Occidentale). Rapport BRGM ; 229 p*
- Greigert J (1978) *Atlas des eaux souterraines du Niger : Etat des connaissances, Tome I, Rapport BRGM, 438p*
- Greigert J, & R Pognet (1965) *Carte géologique de la République du Niger au 1/2 000 000, BRGM, éd. Paris, France*
- Guéro A (2003) *Etude des relations hydrauliques entre les différentes nappes du complexe sédimentaire de la bordure Sud-Ouest du bassin des Iullemeden (Niger) : Approches géochimique et hydrodynamique. Thèse de doctorat à l'université de Paris Sud, 257p*
- INS (2012) *Présentation des résultats préliminaires du quatrième recensement général de la population et de l'habitat (RGP/H). Rapport, 10*
- Kemgang Dongmo T, Boucher M, Mvondo V Y E, Favreau G, Ngounou Ngatcha B, Yalo N, Goni I B, & Legchenko A (2019) Contribution of time domain electromagnetic and magnetic resonance soundings to groundwater assessment at the margin of lake Chad basin, Cameroon. *Journal of Applied Geophysics*, 170, 103840. <https://doi.org/10.1016/j.jappgeo.2019.103840>
- Kenyon W E (1997) Petrophysical principles of applications of NMR logging. *Log Analyst*, 38(2), 21–

- Koch M, and Missimer T M (2016) Water Ressources Assessment and Management in Drylands, *Water* 2016, 8, 239; [doi:3390/w8060239](https://doi.org/10.3390/w8060239)
- Leblanc M J, Favreau G, Massuel S, Tweed S O, Loireau M, Cappelaere B (2008) Land clearance and hydrological changes in the Sahel : SW Niger. *Global and Planetary Change* 61 (2008) 135-150; [doi:10.1016/j.gloplacha.2007.08.011](https://doi.org/10.1016/j.gloplacha.2007.08.011)
- Leduc C, Favreau G, Schroeter P (2001) Long terme rise in the Sahelian water-table : The Continental Terminal in South-West Niger. *Journal of Hydrology*, 243, (2001) 43-54
- Legchenko A, Baltassat J M, Beauce A, & Bernard J (2002) Nuclear magnetic resonance as a geophysical tool for hydrogeologists. *Journal of Applied Geophysics*, 50(1–2), 21–46. [https://doi.org/10.1016/S0926-9851\(02\)00128-3](https://doi.org/10.1016/S0926-9851(02)00128-3)
- Legchenko A, Comte J C, Ofterdinger U, Vouillamoz J M, Lawson F M A, & Walsh J (2017). Joint use of singular value decomposition and Monte-Carlo simulation for estimating uncertainty in surface NMR inversion. *Journal of Applied Geophysics*, 144, 28–36. <https://doi.org/10.1016/j.jappgeo.2017.06.010>
- Legchenko A, Ezersky M, Camerlynck C, Al-Zoubi A, & Chalikakis K (2009) Joint use of TEM and MRS methods in a complex geological setting. *Comptes Rendus Geoscience*, 341(10–11), 908–917. <https://doi.org/10.1016/j.crte.2009.07.013>
- Legchenko A, & Valla P (2002) A review of the basic principles for proton magnetic resonance sounding measurements. *Journal of Applied Geophysics*, 50(1–2), 3–19. [https://doi.org/10.1016/S0926-9851\(02\)00127-1](https://doi.org/10.1016/S0926-9851(02)00127-1)
- Lubczynski M, & Roy J (2005) MRS contribution to hydrogeological system parametrization. *Near Surface Geophysics*, 3(3), 131–139. <https://doi.org/10.3997/1873-0604.2005009>

- Nazoumou Y, Favreau G, Adamou M M, & Mainassara I (2016) La petite irrigation par les eaux souterraines, une solution durable contre la pauvreté et les crises alimentaires au Niger ? *Cahiers Agricultures*, 25(1). <https://doi.org/10.1051/cagri/2016005>
- Oladunjoye M A, Adefehinti A, & Akinrinola O R, (2021) Integrated geophysical investigation for the characterisation of valley bottom soil at Ilora, Southwestern Nigeria, *NRIAG Journal of Astronomy and Geophysics*, 10:1, 110-124, DOI: 10.1080/20909977.2020.1859668
- Amal Othman, Ismael M Ibraheem, Hosni Gazali Hani Mesbah, Torleif Dahlin (2018) Hydrogeophysical and hydrochemical characteristics of Pliocene groundwater aquifer at the area northwest El Sadat city, West Nile Delta, Egypt., *Journal of African Earth Sciences*, doi:10.1016/j.jafrearsci.2018.10.011
- Owen R, & Dahlin T (2005) Alluvial aquifers at geological boundaries: geophysical investigations and groundwater resources. In E. Bocanegra, M. Hernandez, & E. Usunoff (Eds.), *Groundwater and human development*. (pp. 233-246). A A Balkema Publishers
- Plata J L, & Rubio F M (2008) The use of MRS in the determination of hydraulic transmissivity: The case of alluvial aquifers. *Journal of Applied Geophysics*, 66(3–4), 128–139. <https://doi.org/10.1016/j.jappgeo.2008.04.001>
- Plata J, & Rubio F (2002) MRS experiments in a noisy area of a detrital aquifer in the south of Spain. *Journal of Applied Geophysics*, 50(1–2), 83–94. [https://doi.org/10.1016/S0926-9851\(02\)00131-3](https://doi.org/10.1016/S0926-9851(02)00131-3)
- Prakash R, Srinivasamoorthy K, Gopinath S, & Saravanan K (2018) Measurement of submarine groundwater discharge using diverse methods in Coleroon Estuary, Tamil Nadu, India. *Applied Water Science*, 8(1), 1–11. <https://doi.org/10.1007/s13201-018-0659-0>
- Reynolds J M (2011) An Introduction to Applied and Environmental Geophysics, *Second Ed*, J. Wiley Publ., UK. 712 pp

- Schirov M, Legchenko A, & Creer G (1991) A new direct non-invasive groundwater detection technology for Australia. *Exploration Geophysics*, 22(2), 333–338. <https://doi.org/10.1071/EG991333>
- Speed R, & Killen A (2020) Hydrogeology of the Gillingarra Paleochannel, *Resource management technical report 413, Department of Primary Industries and Regional Development, Perth. 74pp*
- Tarnavsky E, Mulligan M, Ouessar M, Faye A, Black E, (2013) Dynamic Hydrological Modeling in Dryland with TRMM Based Rainfall, *Remote sens. 2013, 5, 6691-6716; doi:10.3390/rs5126691*
- Taylor R G, Todd M, Kongola L, Nahozya E, Maurice L, Sanga H, and MacDonald A (2013a) Evidence of the dependence of groundwater resources on extreme rainfall in East Africa. *Nature Climate Change*, Vol. 3, 374-378
- Taylor G R, Scanlon B, Döll P, Rodell M, et al. (2013b) Ground water and climate change, *Nature Clim. Change* <http://dx.doi.org/10.1038/nclimate1744> (2012)
- Taylor M C, Belušić D, Guichard F, Parker D J, Vischel T, Bock O, Harris P P, Janicot S, Klein C, & Panthou G (2017) Frequency of extreme Sahelian storms tripled since 1982 in satellite observations. *NATURE*, 544(7651), 475-478. [doi:10.1038/nature22069](https://doi.org/10.1038/nature22069)
- Trushkin D V, Shushakov O A, L A V (1994) *The potential of a noise-reducing antenna for surface NMR groundwater surveys in the earth's magnetic field*, *Geophysical Prospecting*, 42(8), 855-862. <https://doi.org/10.1111/j.1365-2478.1994.tb00245.x>
- Vouillamoz J M (2003) *Les caractéristiques des aquifères par une méthode non invasive: Les sondages par resonance magnétique protonique. Thèse de doctorat de l'Université de Paris XI, 315p*
- Vouillamoz J M, Chatenoux B, Mathieu F, Baltassat J M, & Legchenko A (2007) Efficiency of joint use of MRS and VES to characterize coastal aquifer in Myanmar. *Journal of Applied Geophysics*, 61(2), 142–154. <https://doi.org/10.1016/j.jappgeo.2006.06.003>

- Vouillamoz J M, Favreau G, Massuel S, Boucher M, Nazoumou Y, & Legchenko A (2008) Contribution of magnetic resonance sounding to aquifer characterization and recharge estimate in semiarid Niger. *Journal of Applied Geophysics*, 64(3–4), 99–108. <https://doi.org/10.1016/j.jappgeo.2007.12.006>
- Yalo N, Alle C, D M, (2013) TDEM study of the variation of freshwater lens morphology between rainy and dry season in the coastal shallow aquifer of south Benin. *International Journal of Current Research*, Vol. 5, 11, pp.3547-3553, November. <http://www.journalcra.com>
- Yao Y, Zheng C, Tian Y, Li X, Liu J (2017) Eco-hydrological effects associated with environmental flow management: A case study from the arid desert region of China. *Ecohydrology*. 2018;11:e1914, <https://doi.org/10.1002/eco.1914>
- Yao Y, Tian Y, Andrews C, Li X, Zheng Y, & Zheng C (2018) Role of groundwater in the dryland ecohydrological system: A case study of the Heihe River Basin. *Journal of Geophysical Research: Atmospheres*, 123. <https://doi.org/10.1029/2018JD028432>
- Yaranmaci U (2004) New technologies in groundwater exploration. Surface Nuclear Magnetic Resonance. *Geologica Acta*, Vol. 2, No.2, 2004, 109-120. <http://www.geologica.acta.com>
- Zhao Y, Wei Y, Li S, Wu B, (2016) Downstream ecosystem responses to middle reach regulation of river discharge in the Heihe River Basin, China. *Hydrol. Earth Syst. Sci.*, 20, 4469-4481, 2016, www.hydrol-earth-syst-sci.net/20/4469/2016, doi:10.5194/hess-20-4469-2016

