

Reactional Ultrasonic Systems And Microwave Irradiation For Pretreatment Of Agro-Industrial Waste To Increase Enzymatic Activity

Fabiane Fernanda Czapela

Laboratory of Microbiology and Bioprocesses, Universidade Federal da Fronteira Sul - UFFS, Rodovia ERS 135 - km 72, nº 200, Erechim, RS, Brazil. Zip code 99700-970

Simone Kubeneck

Laboratory of Microbiology and Bioprocesses, Universidade Federal da Fronteira Sul - UFFS, Rodovia ERS 135 - km 72, nº 200, Erechim, RS, Brazil. Zip code 99700-970

Karina Paula Preczeski

Laboratory of Microbiology and Bioprocesses, Universidade Federal da Fronteira Sul - UFFS, Rodovia ERS 135 - km 72, nº 200, Erechim, RS, Brazil. Zip code 99700-970

Caroline Dalastra

Laboratory of Microbiology and Bioprocesses, Universidade Federal da Fronteira Sul - UFFS, Rodovia ERS 135 - km 72, nº 200, Erechim, RS, Brazil. Zip code 99700-970

Thamarys Scapini

Laboratory of Microbiology and Bioprocesses, Universidade Federal da Fronteira Sul - UFFS, Rodovia ERS 135 - km 72, nº 200, Erechim, RS, Brazil. Zip code 99700-970

Charline Bonatto

Laboratory of Microbiology and Bioprocesses, Universidade Federal da Fronteira Sul - UFFS, Rodovia ERS 135 - km 72, nº 200, Erechim, RS, Brazil. Zip code 99700-970

Fábio Spitz Stefanski

Laboratory of Microbiology and Bioprocesses, Universidade Federal da Fronteira Sul - UFFS, Rodovia ERS 135 - km 72, nº 200, Erechim, RS, Brazil. Zip code 99700-970

Aline Frumi Camargo

Laboratory of Microbiology and Bioprocesses, Universidade Federal da Fronteira Sul - UFFS, Rodovia ERS 135 - km 72, nº 200, Erechim, RS, Brazil. Zip code 99700-970

Jessica Zanivan

Laboratory of Microbiology and Bioprocesses, Universidade Federal da Fronteira Sul - UFFS, Rodovia ERS 135 - km 72, nº 200, Erechim, RS, Brazil. Zip code 99700-970

Altemir José Mossi

Laboratory of Microbiology and Bioprocesses, Universidade Federal da Fronteira Sul - UFFS, Rodovia ERS 135 - km 72, nº 200, Erechim, RS, Brazil. Zip code 99700-970

Gislaine Fongaro

Department of Microbiology, Immunology and Parasitology, Universidade Federal de Florianópolis - UFSC, Engenheiro Agrônomo Andrei Cristian Ferreira St., Trindade, Florianópolis, SC, Brazil. Zip code 88040-900

Helen Treichel (✉ helentreichel@gmail.com)

Universidade Federal da Fronteira Sul <https://orcid.org/0000-0002-3810-3000>

Research

Keywords: Reaction system, Keratin residues, Biotechnological processes

Posted Date: April 23rd, 2020

DOI: <https://doi.org/10.21203/rs.3.rs-22357/v1>

License: © ⓘ This work is licensed under a Creative Commons Attribution 4.0 International License.

[Read Full License](#)

Version of Record: A version of this preprint was published on September 26th, 2020. See the published version at <https://doi.org/10.1186/s40643-020-00338-2>.

Abstract

Keratinous residues are generated in large quantities in industrial processes and because of this they are difficult to manage because the presence of keratin. Keratinases are emerging as promising alternatives in technological processes. The objective of this work was to determine the potential of pretreatment of agro-industrial residues using an ultrasonic probe, and to evaluate activity enhancement strategies by analyzing the behavior of enzymatic activity of keratinases exposed to various reaction systems as well as to enzymatic concentration. We tested the application of enzymatic extracts in the degradation of keratinous residues. Submerged fermentation was performed with swine hair pretreated with and without ultrasonic probe. The enzymatic extracts were exposed to reaction systems and the enzymatic concentration technique to measure the increments of enzymatic activity. We found that the ultrasonic probe increased reaction rates, enabling higher enzyme production in shorter time periods. The ultrasonic probe reached 38.4% of relative activity and the enzyme concentration, increased the enzymatic activity in 53.5%. We observed potential degradation of chicken feathers with homemade enzyme extracts. Taken together, our findings suggest that the results obtained in this work are promising, despite the fact that the data in this area are scarce.

1. Introduction

Keratinous waste is generated in large quantities; management is hampered by its resilient structure (Onifade et al, 1998; Łaba et al. 2015). These residues consist of fibrous proteins such as keratins that are resistant to physical, chemical and enzymatic actions (Korniłowicz-Kowalska and Bohacz 2011). When found in their solid state, the structure of the keratin increases its stiffness because of cysteine bonds (Barone et al. 2006), as well as by α and β -keratin chains and disulfide bonds (Onifade et al. 1998). A α -keratin can be found in materials such as hair, fur, nails, hooves and animal horns, while β -keratin is present in scales, bird feathers and beaks (Korniłowicz-Kowalska and Bohacz 2011; Mazotto et al. 2011; Ire and Onyenama 2017).

One way to promote the degradation of these residues is via biotechnological processes, allowing degradation through the action of specific enzymes such as keratinases (Gupta and Ramnani 2006; Brandelli 2008; Brandelli, Daroit and Riffel 2010; Gegeckas et al. 2018). Keratinases (EC 3.4.21/24/99.11) are a class of proteases with the specific potential to hydrolyze keratin, giving them a prominent role over other proteases (Brandelli, Daroit and Riffel 2010; Gegeckas et al. 2018). These enzymes have applications such as biotechnology (Okoroma et al. 2012; Mazotto et al. 2013; Paul et al. 2014; Brandelli, Sala and Kalil 2015) and waste degradation (Fang et al. 2013a; Yusuf et al. 2016; Su et al. 2017; Abdel-Fattah et al. 2018; Thankaswamy et al. 2018). They can be obtained commercially or from submerged fermentation (FS) or solid-state fermentation (FES) through microorganisms (Mazotto et al. 2013) such as fungi (Kushwaha 1983; Santos et al. 1996), considered good producers of keratinases; they can also be isolated from keratinous waste disposal sites (Kaul and Sumbali 1997; Riffel and Brandelli 2006). When obtained in this way, they are designated "homemade" and can be used in crude or concentrated

form, a technique that combines the interaction of the enzyme with salts and solvents so as to separate out interferences (Preczeski et al. 2018).

Because of the biotechnological importance of keratinases, several studies have been performed to improve the activity and evaluate the conformational change of enzymes in general, when exposed to different reaction systems, including ultrasonic probe and bath and microwave (Ma et al. 2011; Jin et al. 2015; Mazinani, DeLong and Yan 2015). Simple and efficient heating technologies increase enzyme activity and conformational change (Ma et al. 2011); residue pretreatment techniques using an ultrasonic probe (Azmi, Idris and Yusof 2018), makes the structures more accessible to microbial and enzymatic attack (Yusof and Ashokkumar 2015).

The present study aimed to evaluate the potential for pretreatment of agro-industrial residues using an ultrasonic probe and to investigate the behavior of keratinases exposed to the following reaction systems: ultrasonic probe, ultrasonic bath and microwave and enzymatic concentration technique. In addition to comparing the activity of homemade enzymes with commercial enzymes and finally, we applied enzymatic extracts for the degradation of keratinous residues such as swine hair and chicken feathers.

2. Materials And Methods

2.1 Keratin substrates

Swine hair and chicken feathers were obtained from a food agroindustry in Rio Grande do Sul, Brazil. Residues were stored at -4 °C until use. Prior to use, the residues were washed with water and detergent, and immersed in 70% alcohol for 1 h, followed by drying at 70 ± 2 °C for 16 h (Adapted Călin et al. 2017). Chicken feathers were used in the degradation tests only.

2.2 Swine hair pretreatment by ultrasonic probe

Swine hair (1 g) underwent pretreatment using an ultrasonic probe, comparing the micropoint and macropoint. The variables used were power (100%), pulse (3) and exposure time (15 min) using distilled water as a liquid medium (Adapted from Azmi, Idris and Yusof 2018). The tests were performed with the ECO-SONICS Ultrasonic Probe/Cell Disrupter Sonicator, 20 KHz ultrasonic frequency and 550 W ultrasonic power, equipped with a 4 mm titanium micropoint and 13 mm diameter titanium macropoint.

The sonicated content was filtered on filter paper and the solid fraction was subjected to a microbial load reduction process using 70% alcohol and heating at 70 ± 2 °C for 16 h before starting fermentation.

2.3 Submerged fermentation

Submerged fermentation was performed with swine hair. To this end, 10 g L^{-1} of pretreated and not pretreated ultrasonic probe residue was poured into 50 mM Tris HCl buffer (pH 8.5) with the addition of 10^6 spores mL^{-1} of *Fusarium oxysporum*. The fermentative medium was incubated at 150 rpm and

28 °C for 9 days (Preczeski et al. 2020). The fungus used was isolated from soil-borne chicken feather residues and identified by the Next Generation Sequencing (NGS) method.

At the end of the fermentation, the fermented medium was filtered and the retained solid fraction was dried to quantify the degradation percentage of the agro-industrial residue. The filtrate was used to measure keratinolytic activity and exposure in different reaction systems. Keratinolytic activity was quantified at 3, 6 and 9 days and the percentage of residue degradation after 9 days.

2.4 Keratinase assay

Keratinolytic activity was measured using 0.013 g azoqueratin as substrate (SIGMA-ALDRICH K8500 *α -K*), 3.2 mL 50 mM Tris HCl buffer (pH 8.5) and 0.8 mL enzyme extract. The reaction took place in an ultrathermostatic bath at 50 °C for 1 h, after which 0.8 mL of 10% trichloroacetic acid (TCA) was added to stop the reaction, reading at 595 nm spectrophotometer (Adapted Bressollier et al. 1999).

One unit of keratinase activity was defined as the amount of enzyme required to produce a 0.01 absorbance increase under the described assay conditions. Enzyme activity was determined before and after exposure to reaction systems. Relative activity (%) was also calculated for activity increment purposes.

2.5 Enzyme activity increase

2.5.1 Exposure of enzyme extracts to reaction systems

Enzymatic extracts produced using swine hair as substrate pretreated with ultrasonic probe with macropoint and not pretreated were exposed to ultrasonic probe, ultrasonic bath and microwave using the experimental design methodology, aiming to evaluate the behavior of the enzymes. Each reaction system was evaluated using central composite design (CCD) based on previously defined independent variables, according to reaction interest and system possibilities. The response variable was relative activity (%), resulting from the variation between keratinolytic activities of the extract before and after exposure to reaction systems.

2.5.1.1 Ultrasonic probe

A 20 mL aliquot of the crude enzyme extract was exposed to the ECO-SONICS Cell Disruptor Probe (20 KHz and 550 W) equipped with a 4-mm diameter titanium micropoint. The behavior of keratinases was evaluated under different conditions of exposure time (2 to 10 minutes), power (40–80%) and pulse (1 to 3) following experimental design.

2.5.1.2 Ultrasonic bath

In this reaction system, 2 mL aliquots of the crude enzyme extract were exposed to the ultrasonic bath, varying the temperature (°C), the power (%) and the exposure time (min) of the enzyme extract according to experimental design. The equipment used was the UNIQUE Ultrasonic Washer, model USC-1800 A,

frequency US 40 KHz and maximum power of 137 W ($0.42 \text{ W cm}^2 \text{ }^{-1}$). The tests were performed with ultrasonic bath temperature ranging from 30 to 80 °C, ultrasonic power ranging from 0 to 100% and with exposure time of 10 to 40 minutes, following experimental design (Mulinari et al. 2017).

2.5.1.3 Microwave

Aliquots of 3 mL of crude enzyme extract were exposed to microwave, varying conditions according to experimental design. Exposure of the enzyme to microwaves was evaluated in the time range of 5 to 15 minutes, using temperatures between 30 and 80 °C, according to the methodology described by Mazinani, Delong and Yan, (2015). The equipment used was the ANTON PAAR Monowave 100 Microwave Reactor which has unpulsed 500 W output power (ANTON PAAR).

2.5.2 Enzymatic concentration

To test the most economically viable enzymatic activity increment methods, the enzyme concentration technique was performed. Enzyme extracts obtained from the fermentation process were concentrated using 0.5 mol L^{-1} NaCl and 50% ($v v^{-1}$) acetone. The tests were performed in an ice bath at 4 °C. After centrifugation at $9500 \times g$, 4 °C and 20 min, the supernatant phase was discarded and the precipitate was resuspended with 50 mM Tris HCl buffer (pH 8.5) (Preczeski et al. 2018).

The concentrated enzymatic extract (homemade) was exposed to reaction systems under the conditions of greatest activity increase in experimental designs and applied to the degradation of swine hair and chicken feathers, aiming to evaluate the degradation potential of keratinous residues.

2.6 Commercial enzymes and reaction systems

The activity of the homemade enzyme extract was compared with that of the commercial enzyme K4519 SIGMA with initial enzymatic activity of 2812.5 U mL^{-1} . K4519 SIGMA keratinase was diluted in 5 mM phosphate buffer (pH 7.0). The enzyme was exposed to the optimal enzymatic increment conditions obtained in the experimental designs for the ultrasonic probe, ultrasonic bath and microwave and was subsequently used for the degradation of keratinous residues.

2.7 Evaluation of keratin residue degradation

Swine hair and chicken feather degradation was evaluated using crude and concentrated enzyme extracts, both with and without exposure to reaction systems. The degradation potential of agro-industrial residues was also evaluated using the commercial enzyme extract K4519 SIGMA before and after exposure to reaction systems.

One whole feather or 0.1 g of swine hair was used for each 8 mL of enzyme extract. Assays were incubated at 28 °C for 28 days (Scott and Untereiner 2004), and the result was evaluated based on visible residue degradation.

2.8 Characterization of homemade keratinase enzymes

For the purpose of obtaining the optimal pH and temperature of the enzyme used, a characterization was carried out evaluating different pH conditions, ranging from 5 to 9 and temperature, from 37 °C to 70 °C. The buffers used were: 50 mM citrate buffer pH 5.0 and 5.7; 50 mM sodium phosphate buffer pH 7.1, pH 8.4 and pH 9.0; 50 mM Tris HCl buffer pH 8.5. The characterization was carried out in an ultrathermostatic bath and the activity measurement followed that specified in item 2.4.

2.9 Statistical analysis

The experiments were statistically evaluated using CCD and the results of the enzymatic activity were analyzed using Protimiza Experimental Design software (Rodrigues and lemma, 2014), using 95% confidence analysis of variance ($p < 0.05$). Results were presented as mean \pm standard deviation of triplicate experiments. Statistical differences between data sets were verified using ANOVA and Tukey test.

3. Results And Discussion

3.1 Swine hair pretreatment by ultrasonic probe

The fermentative process to obtain the enzymatic extract was performed using swine hair as the substrate that had been pretreated with or without the ultrasonic probe. Enzymatic activities and degradation percentages were evaluated (**Table 1**).

Table 1

Keratinolytic activity after pretreatment in an ultrasonic probe and without pretreatment at 3, 6 and 9 days, as well as the percentage of degradation obtained at the end of the fermentation process.

Swine hair		Enzymatic activity (U mL ⁻¹)			Degradation (%)
Pretreatment by ultrasonic probe	<i>Micropoint</i>	3 days	6 days	9 days	31.8 \pm 1.1 ^a
		38.8 \pm 5.3 _a	81.0 \pm 5.2 _a	55.7 \pm 3.0 _a	
	<i>Macropoint</i>	3 days	6 days	9 days	45.5 \pm 0.8 ^b
		50.8 \pm 5.3 _b	39.5 \pm 4.8 _b	43.8 \pm 1.1 _b	
Without pretreatment		3 days	6 days	9 days	36.3 \pm 4.0 ^a
		25.0 \pm 5.6 _a	82.2 \pm 9.4 _a	75.2 \pm 3.2 _c	
*Equal lowercase letters do not differ from each other by the Tukey test on the column.					

The keratinolytic activity obtained on the third day of the fermentation in the swine hair pretreated with the ultrasonic probe macropoint was $50.8 \pm 5.3 \text{ U mL}^{-1}$. From this result, it can be inferred that the greater energy dissipation caused by the macropoint resulted in more relevant data of enzymatic activity, because it has a larger diameter than that of the micropoint, which achieved enzymatic activity ($38.8 \pm 5.3 \text{ U mL}^{-1}$) similar to that obtained with the crude residue ($25.0 \pm 5.6 \text{ U mL}^{-1}$).

We found that the micropoint did not have the same impact on structure in terms of enzymatic activity for the 3rd day, because the ultrasonic system can be influenced by several factors, including energy dissipation, ultrasonic intensity, temperature, exposure time, and diameter (Lippert et al. 2018), all of which may have resulted in lower erosion efficiency of the structure when using the micropoint than when using the macropoint.

The highest keratinolytic activity was observed for swine hair without pretreatment and with micropoint pretreatment at 6 days of fermentation: $82.2 \pm 9.4 \text{ U mL}^{-1}$ and $81.0 \pm 5.2 \text{ U mL}^{-1}$, respectively. Regarding the degradation percentage, the highest degradation occurred in the pretreatment test with ultrasonic probe with macropoint ($45.5\% \pm 0.8\%$), and it can be inferred that the abrasion and erosion in the structure of swine hair, which resulted in the highest enzymatic activity in three days for the same assay, also presented the highest dissolution of structural chains that make up the residue in question, resulting in the largest mass loss in this experiment.

The ultrasonic probe increases reaction rates, especially hydrolysis processes (Zou et al. 2016). Ultrasonic systems facilitate structural degradation via propagation of ultrasonic waves that cause bubble cavitation, causing temperature rise, favoring the formation of rapidly reacting radicals (Wang 1981; Manasseh et al. 2010; Yusof and Ashokkumar 2015), improving the enzymatic attack on the substrate (Yang and Fang 2015). The cavitation process is the fundamental factor for the efficiency of ultrasound pretreatment, because the explosion of bubbles near the surface of the material causes abrasion and erosion, reducing the surface area of the structure and, consequently, improving the processes. hydrolysis and enzyme production (McClements 1995; Barton Bullock and Weir 1996; Mason et al. 2011). Similar observations were reported by Jin et al. (2015), who verified changes in the kinetic characteristics between proteins and substrates in ultrasonic systems, observing the increase in hydrolysis rate, improving the affinity between enzyme and substrate.

Pretreatment with an ultrasonic probe can be considered viable with the use of the macropoint when the objective of the process is enzyme production in shorter times. Visualizing the system in search of an efficient residue degradation and relevant enzymatic activities, the system with swine hair without pretreatment presented greater viability in relation to the higher enzymatic productions of the other experiments, considering that in six days there was an enzymatic production of approximately 38% greater than with the pretreated macropoint residue in three days, and only a 10% difference in residue degradation from the same assay. Comparing the data from the pretreated residue with micropoint, there was no significant difference between the data, suggesting that using the residue without pretreatment is more promising, in addition to ensuring lower energy expenditure.

3.2 Enzyme activity increase

3.2.1 Exposure of enzyme extracts to reaction systems

Exposure to reaction systems was performed to evaluate the behavior of keratinases enzymes in various reaction systems. The ultrasonic probe, ultrasonic bath and microwave were evaluated. Two enzyme extracts were exposed to the reaction systems: a) enzymatic extract from FS carried out with swine hair pretreated with ultrasonic probe with micropoint; b) enzymatic extract from FS carried out with swine hair without pretreatment.

3.2.1.1 Ultrasonic Probe

The enzymatic extracts were exposed to an ultrasonic probe using the micropoint. This was studied based on an experimental matrix (**Table 2**), which presents the results obtained for the independent variables of exposure time, power and pulse, and evaluated relative activity in response.

Table 2

Experimental planning matrix (real and coded values) and relative activity results (%) for the conditions evaluated in the reaction system ultrasonic probe with enzymatic extracts produced from swine hair pretreated by ultrasonic probe and without pretreatment.

Assays	Ultrasonic probe			Relative activity (%)	
	Time (min)	Power (%)	Pulse	Pretreatment by ultrasonic probe	Without pretreatment
1	-1 (2)	-1 (40)	-1 (1)	11.3	38.4
2	+ 1 (10)	-1 (40)	-1 (1)	0.0	1.4
3	-1 (2)	+ 1 (80)	-1 (1)	2.7	16.3
4	+ 1 (10)	+ 1 (80)	-1 (1)	0.0	9.1
5	-1 (2)	-1 (40)	+ 1 (3)	0.0	21.1
6	+ 1 (10)	-1 (40)	+ 1 (3)	0.0	0.0
7	-1 (2)	+ 1 (80)	+ 1 (3)	23.3	25.2
8	+ 1 (10)	+ 1 (80)	+ 1 (3)	0.0	10.3
9	0 (6)	0 (60)	0 (2)	0.0	0.0
10	0 (6)	0 (60)	0 (2)	0.0	3.0
11	0 (6)	0 (60)	0 (2)	0.0	0.0
12	0 (6)	0 (60)	0 (2)	0.0	0.0
Crude enzymatic extract*				75.0 U mL ⁻¹	124.3 U mL ⁻¹
* Enzymatic extract obtained after FS without exposure to reaction systems.					

For the enzymatic extract produced from swine hair pretreated using the ultrasonic probe, up to 23.3% were observed in test 7, corresponding to the shortest time evaluated (2 min) (**Table 2**). When subjected to effects analysis, only the time variable was significant, affecting it negatively: the shorter the exposure time to the ultrasonic probe, the greater the keratinolytic activity. Power and pulse were not significant.

For the enzymatic extracts obtained with swine hair that was not pretreated, more promising increments were observed. **Table 2** shows that test 1 showed the largest increase in keratinolytic activity in relation to crude enzyme extract, i.e., 38.4% increase in enzymatic activity. The analysis of the effects of the variables on keratinolytic activity showed that only the time variable was significant in the process, negatively affecting the enzymatic activity: the longer the exposure time to the ultrasonic probe, the lower the keratinolytic activity achieved. As before, power and pulse were not significant in the process. In both cases studied, the statistical model was not validated due to $F_{cal} < F_{tab}$.

The largest increases in activity occurred in the shortest exposure time evaluated (2 min), corroborating the statistical analysis. Ultrasonic systems are responsible for generating waves that propagate through a liquid, which collapse at high temperatures. This phenomenon is called cavitation. The shear force

resulting from the explosion of these microbubbles causes rapid heat and mass transfer, promoting increased enzymatic activity (Jin et al. 2015). Thus, the increase in activity may be a result of the shorter exposure time to the ultrasonic probe that favors the decomposition of interfering molecules and the change in enzymatic specificity, making enzymes more easily accessible to the reaction and consequently increasing their activity, providing an ideal environment for the reaction between enzyme and substrate (McClements 1995; Jin et al. 2015). The enzyme also remains more regular and flexible because thermodynamic parameters such as E_a , ΔH and ΔS are reduced with the use of ultrasound, causing an improvement in its activity and improving the operational stability of enzymes (Ma et al. 2011; Wang, Chen and Zhu 2013).

In assays where the exposure time was longer (from 6 to 10 min), the activity was lower and, in some cases, lower than the activity obtained in the enzyme extract without exposure to the ultrasonic probe, possibly due to the enzymatic denaturation caused by the longer exposure time to the ultrasonic probe (Kapturowska, Stolarzewicz and Krzyczkowska 2012). Denaturation of enzymes can occur due to excess pressure, temperature or even shear force generated during the cavitation phenomenon in the ultrasonic system (Grintsevich et al. 2001; Potapovich, Eremin and Metelitzka 2003).

It is important to note that the use of ultrasonic systems is efficient in reducing reaction time, promoting increased enzymatic activity in many cases. On the other hand, depending on the conditions studied, there may be an enzymatic denaturation and consequently a decrease in enzyme activity.

3.2.1.2 Ultrasonic bath

The greatest increase in enzymatic activity obtained for the ultrasonic bath occurred in the enzymatic extract from swine hair pretreated with ultrasonic probe (30.2%), with a temperature of 80 °C during 40 minutes of exposure and 0% power, corresponding to test 6.

Analysis of effects on keratinolytic activity showed that temperature and power were important. The temperature variable had significant positive effects; that is, the higher the temperature, the higher the keratinolytic activity. The power variable affected the enzyme activity negatively; the lower the power, the higher the activity. Time had no influence on enzymatic activity. Because $F_{cal} > F_{tab}$, the statistical model was validated.

For enzymatic extract produced from swine hair without pretreatment, only test 3, corresponding to a temperature of 30 °C during 10 minutes and 100% power, provided an increase of keratinolytic activity in relation to the crude enzyme, which was 5.9%. However, when the results were subjected to effects analysis, no variable was significant. For this enzyme extract studied, the model was not statistically validated due to $F_{cal} < F_{tab}$.

In the enzymatic extracts evaluated, different behaviors of the enzyme regarding temperature were observed. For the pretreated residues, the enzyme extract increased the activity at a temperature of 80 °C and for the untreated residues, the only activity increase was at the temperature of 30 °C, the mildest within the study range. This shows that the enzymes produced during submerged fermentation with

pretreated and untreated residues are different in the mode of action compared to the ultrasonic bath reaction system.

The behavior observed for ultrasonic bath may be related to the synergistic effect of ultrasonic waves with temperature. Several studies show increased activity of enzymes exposed to ultrasonic bath (Leaes et al. 2013; Mulinari et al. 2017). According to the literature, temperature considerably influences the increase or decrease of enzymatic activity. With a rise in temperature the activity may be increased, but depending on the structure of the enzyme, if there is a very significant rise in temperature, denaturation may occur (Resa et al. 2009). This behavior was described in the studies by Wang et al. (2011) and Ovsianko et al. (2005), where enzymatic denaturation occurred due to the effect of ultrasonic sonication causing an increase in temperature, also stimulating the effect of cavitation.

Ultrasonic bath alters the behavior of exposed enzymes. Thus, the use of ultrasonic systems can promote increases in enzymatic activity, possibly due to conformational changes in protein structure, in addition to considerably reducing the reaction time (Leaes et al. 2013) and also the decrease in activity by denaturing (Resa et al. 2009).

3.2.1.3 Microwave

For the enzymatic extract produced from swine hair pretreated using the ultrasonic probe, test 2 showed an increase of activity, 15.1% at 80 °C for 5 minutes. Performing statistical analysis, we noted that the temperature variable was significantly positive: the higher the temperature, the higher the keratinolytic activity achieved. Time had no influence on enzymatic activity. The model was statistically validated by $F_{cal} > F_{tab}$.

For the enzymatic extract obtained from swine hair without pretreatment, we found that no assay showed an increase of keratinolytic activity. However, performing the statistical analysis, we noted that the time variable was significantly negative; that is, the longer the microwave exposure time, the lower the keratinolytic activity achieved. The temperature had no influence on enzymatic activity.

The increase in activity obtained for enzymatic extract produced from swine hair pretreated with ultrasonic probe was because the microwaves provided an increase in enzymatic activity and an increase in reaction efficiency due to instantaneous overheating. Causing tremendous agitation of molecules that induces an increase in energy collisions, also increasing reaction and conversion rates (Ma et al. 2011; Mazinani, DeLong and Yan 2015).

The mechanism of microwave operation occurs by the interaction of the electromagnetic field with matter. This causes a movement of ions, which in turn cause heat generation by two mechanisms, dipole rotation and ion conduction. In chemical reactions, microwaves cause molecular friction due to the polarization of molecules. This process is responsible for increasing the friction of these molecules, consequently increasing the temperature and the reaction rate (Lopes et al. 2015). In this manner, microwave irradiation can cause conformational changes in the exposed structure, leading to increased

enzyme activity or even damage such as enzymatic denaturation (Leonelli and Mason 2010; Lopes et al. 2015; Mazinani, DeLong and Yan 2015).

Some authors point out that the use of microwaves can cause changes in thermodynamic properties, providing increased enzymatic activity (Mazinani, DeLong and Yan 2015; Golunski et al. 2017). These findings suggest that conformational changes in the structure of enzymes occur when exposed to microwaves, possibly due to cleavages that occur during the process and the formation of hot spots by instant heating.

On the other hand, high temperatures and exposure times cause enzymatic denaturation. Possibly this occurred in the assays with enzymatic extract produced from untreated swine hair, where mild temperatures of 30 °C were sufficient to cause decreased enzyme activity.

Temperature is one of the factors that most influence the behavior of enzymes exposed to microwave irradiation. This causes collisions between molecules to increase, and this causes an increase in energy, causing faster reaction rates. However, at very high temperatures, the reaction rate is reduced due to the denaturation of enzymes, caused by heat breakage and also the breakdown of ionic and hydrogen bonds, stabilizing the protein structure (Yadav and Borkar 2009; Khan and Rathod 2018).

3.2.1.4 Larger increments of enzymatic activity

Given the results obtained for the three reaction systems evaluated, the ultrasonic probe showed greater potential for increased enzymatic activity compared to the other reaction systems (Fig. 1).

The largest increase was obtained using the ultrasonic probe (38.4%) with the enzymatic extract produced from swine hair without pretreatment. Ultrasonic systems also showed good results of increased enzymatic activity for the enzymatic extract produced from swine hair pretreated by ultrasonic probe, with the increment values being 23.3% for ultrasonic probe and 30.2% for ultrasonic bath. In addition, these values were reached under mild conditions of time, power and pulse, making the process more viable.

3.2.2 Enzymatic concentration

The enzyme concentration technique was performed to verify the possibility of increasing enzymatic activity from an economically viable and simple operation method. Enzyme extracts produced from swine hair without pretreatment were used and the enzyme concentration technique was performed in the presence of NaCl and acetone.

The homemade extract showed an enzymatic activity of 159.3 U mL⁻¹ after the concentration technique, increasing the activity value by 53.5% when compared to the crude enzyme extract (103.8 U mL⁻¹). The concentrated enzymatic extract (homemade) was exposed to reaction systems under the conditions of greatest activity increase in experimental designs, where it presented stability against the ultrasonic

probe, ultrasonic bath and microwave, possibly due to the absence of interferents that were separated during enzymatic concentration.

After exposure, the concentrated enzymatic extract (homemade) was applied in the degradation of swine hair and chicken feathers, aiming to evaluate the degradation potential of keratinous residues.

3.3 Commercial enzymes and reaction systems

The commercial enzyme K4519 SIGMA was exposed to ultrasonic probe, ultrasonic bath and microwave under the conditions of higher relative activity of homemade enzyme, in order to compare with the obtained data.

The enzyme K4519 SIGMA keratinase had initial activity of 2812.5 U mL^{-1} . When subjected to an ultrasonic probe and bath, it showed an 11.1% increase in enzymatic activity. In microwave irradiation, there was a reduction in activity. There was high stability because it is a highly pure enzyme, with little variation when subjected to reaction systems. The activity increase observed for the enzyme K4519 SIGMA keratinase was smaller than that obtained for the homemade enzyme when subjected to ultrasonic probe (38.4%). This behavior is expected because it is a pure enzyme with high stability.

It should be noted that the production of the homemade enzyme is low-cost because it uses a highly available residue, being an inhomogeneous residue with large variations, in addition to the fact of disposal problems secondary to difficult degradation. The produced enzyme gave good values of enzymatic activity and activity increases when subjected to reaction systems, becoming competitive against commercial enzymes.

3.4 Evaluation of keratin residue degradation

Crude and concentrated enzymatic extracts (homemade) without and with exposure to reaction systems were evaluated for degradation potential of keratinous residues. We also compared enzymatic extract with commercial enzyme K4519 SIGMA. Enzyme extracts were incubated at $28 \text{ }^{\circ}\text{C}$ for 28 days and the result was presented based on visible residue degradation and enzymatic activity.

We found that, for the crude enzyme extract and after exposure to reaction systems, the values for keratinolytic activity of the assays containing swine hair and chicken feathers showed small decreases in relation to the initial value for enzymatic activity over the 28 days, however, remaining stable over time, suggesting that the enzyme was active and showing very promising enzyme activity. For the enzyme extract in concentrated form and after exposure to reaction systems, significant increases in keratinolytic activity were observed over the 28 days of study (**Table 3**).

Table 3

Measure of keratinolytic activity at initial time and after 28 days for homemade enzymatic extract crude and concentrated and enzymatic extracts after exposure to ultrasonic reaction systems and microwave irradiation containing swine hair and chicken feathers.

CRUDE	Enzyme Extracts (homemade)	Swine hair		Chicken feathers	
		<i>0° day</i>	<i>28° day</i>	<i>0° day</i>	<i>28° day</i>
	<i>Assays</i>	Enzymatic Activity		Enzymatic Activity	
		(U mL⁻¹)		(U mL⁻¹)	
	Ultrasonic Probe	172.0	137.0	172.0	133.0
	Ultrasonic Bath	153.0	124.0	153.0	115.5
	Microwave	96.0	106.5	96.0	141.0
	Crude Extract	171.0	151.5	171.0	121.5
CONCENTRATED	Enzyme Extracts (homemade)	Swine hair		Chicken feathers	
		<i>0° day</i>	<i>28° day</i>	<i>0° day</i>	<i>28° day</i>
	<i>Assays</i>	Enzymatic Activity		Enzymatic Activity	
		(U mL⁻¹)		(U mL⁻¹)	
	Ultrasonic Probe	159.5	231.0	159.5	192.5
	Ultrasonic Bath	141.8	202.0	141.8	181.5
	Microwave	149.0	229.5	149.0	191.5
	Crude Extract	103.8	-	103.8	-
	Concentrated Extract	159.3	-	159.3	-

Almost total degradation of chicken feathers was observed in the crude enzyme extract and enzyme extracts after exposure to reaction systems (Fig. 2), while for swine hair, there was no degradation in any of the enzyme extracts evaluated. Possibly the enzyme could not access the resistant structure of swine hair. One factor that may explain the ease with which chicken feathers were degraded is the less rigid structure compared to swine hair. Because they are part of the keratin family, swine hair exhibits a structure that is extremely resistant to physical, chemical and also enzymatic actions (Choińska-Pulit, Łaba and Rodziewicz 2019).

The degradation potential of chicken feathers containing the commercial enzyme extract K4519 SIGMA was also evaluated. We found that, during the 28 days of incubation, the commercial enzyme was not able to degrade the chicken feathers, thereby favoring the homemade enzyme extract (Fig. 2).

The results obtained for the degradation test containing the homemade extracts in crude form and after exposure to the reaction systems are promising as evidenced by the degradation potential on keratinous residues. The commercial enzyme K4519 SIGMA is expensive, highly concentrated and stable; nevertheless, it did not degrade the chicken feathers used in the tests.

Swine hair and chicken feathers are part of the group of hard keratins owing to their high concentrations of cysteine, rendering them very resistant (Korniłowicz-Kowalska and Bohacz 2011). However, α -keratin present in the swine hair structure has large amounts of sulfur, which confers highly resistant mechanical properties (Holkar et al. 2018). This explains why chicken feathers are more easily degraded than swine hair.

In addition, the keratin structure formed by disulfide bonds ensures stability and resistance to enzymatic degradation. Kunert (1989) found that the reduction of disulfide bonds considerably influenced the degradation of keratin structure, ensuring efficient keratin hydrolysis. This suggests that the homemade enzyme extract acted on disulfide bonds and reduced the cystine concentration present in the keratin structure, as well as converting the sulfur molecule into smaller structures (Jaouadi et al. 2013).

However, the exact process of degradation involves a series of mechanisms of action that occur in 3 stages. Mechanical keratinolysis occurs by the action of mycelium-producing fungi, involving the penetration of the mycelium into the keratin residue. Then, the hydrolysis of the disulfide bonds occurs, responsible for ensure the resistance and stability of the keratin structure. Finally, proteolysis occurs involving the action of the enzyme itself (Kunert 1989; Onifade et al. 1998).

For the concentrated enzymatic extract, no residue degradation was observed in any of the evaluated extracts. In the tests where there were high values of keratinolytic activity, the degradation percentages were low or almost nonexistent. This agrees with the study by Riffel and Brandelli (2006), where high values for keratinolytic activity were verified; nevertheless, the purified enzyme was not able to degrade chicken feathers. The authors suggest that in these cases, enzymes such as disulfide reductases and proteases need to act so that feather degradation occurs (Fang et al. 2013b).

The presence of inhibitors may explain why there was no residue degradation (Hamiche et al. 2019). Despite the fact that the enzyme is concentrated and the amount of impurities is reduced, it has no potential for degradation of residues (Riffel and Brandelli 2006).

3.5 Characterization of homemade keratinase enzymes

The characterization of homemade keratinases was carried out by evaluating different pH and temperature conditions in an ultrathermostatic bath for 1 h. The highest enzyme activity was achieved at pH 8.5 (50 mM Tris HCl buffer) and 50 °C temperature.

Most of keratinases producing microorganisms operate in the neutral and alkaline pH range, and the degradation of keratin is favored in alkaline pH, with the modification of cysteine residues and making them more accessible for the action of the enzyme. The optimum temperature is in the range of 28 °C to 50 °C, reaching 70 °C depending on the microorganism. In addition, most keratinases have good stability over wide pH and temperature ranges (Anbu et al. 2005).

4. Conclusion

Biotechnological processes involving the biodegradation of keratinolytic materials by action of microorganisms and enzymes are promising alternatives to improve the degradability of these materials, thereby adding value to the material. Ultrasonic and microwave reaction systems are viable alternatives for evaluating the behavior of keratinases and the potential for pretreatment of keratinous residues.

The pretreatment in an ultrasonic probe using the macropoint causes greater energy dissipation due to the larger diameter in relation to the micropoint, thus increasing the reaction rates and facilitating the degradation process of the exposed structures due to the propagation of ultrasonic waves, resulting in greater weight loss. Thus, the use of the ultrasonic probe as a pretreatment can be quite useful when looking for greater enzyme production in a shorter time. For longer processes, the use of waste without pretreatment becomes more promising, also decreasing energy expenditure, since the enzymatic activity achieved over time is greater.

Regarding the evaluation of the behavior of keratinases in relation to reaction systems, different behaviors were observed from enzymatic extracts, showing that it is possible to produce enzymes with different characteristics and behaviors. The ultrasonic probe proved to be more promising, generating the greatest increase in enzymatic activity. The enzymatic concentration showed a significant increase in activity, showing that simple and low-cost techniques can be efficient.

It was found that the crude enzymatic extract has the potential to degrade chicken feathers, while the other extracts used did not show potential for degradation, thus making it a very interesting result.

Declarations

Ethics approval and consent to participate

Not applicable

Consent for publication

All authors agreed with this publication.

Availability of data and materials

The datasets generated for this study are available on request to the corresponding author.

Competing interests

There are not competing interests

Funding

CAPES, CNPq and FAPERGS

Authors' contributions

FFC, SK, KPP, CD, TS, CB, FSS, AFC and JZ: experimental procedures, results discussion, and data treatment
AJM, GF, HT: research coordinators

Acknowledgments

The authors are grateful to the Fundação de Amparo à Pesquisa do Estado do Rio Grande do Sul - FAPERGS, to the Coordenação de Aperfeiçoamento de Pessoal de Nível Superior - CAPES; to the Conselho Nacional de Desenvolvimento Científico e Tecnológico - CNPq; and to the research group at Laboratório de Microbiologia e Bioprocessos - LAMIBI da UFFS campus Erechim.

References

1. Abdel-Fattah A M, El-Gamal M S, Ismail S A, Emran M A, Hashem A M (2018) Biodegradation of feather waste by keratinase produced from newly isolated *Bacillus licheniformis* J Genet Eng Biotechnol 16: 311-318. doi: 10.1016/j.jgeb.2018.05.005
2. Anbu P, Gopinath S C B, Hilda A, Lakshmi priya T, Annadurai G (2005) Purification of keratinase from poultry farm isolate-*Scopulariopsis brevicaulis* and statistical optimization of enzyme activity. Enzyme Microb Technol 36: 639-647. doi: 10.1016/j.enzmictec.2004.07.019
3. ANTON PAAR. Reator de Micro-ondas Monowave 100 ANTON PAAR. Available in: <https://www.anton-paar.com/br-pt/produtos/detalhes/sintese-assistida-por-micro-ondas-monowave-400200/>. Accessed 25 May 2018.
4. Azmi N A, Idris A, Yusof N S M (2018) Ultrasonic technology for value added products from feather keratin. Ultrason Sonochem 47: 99-107. doi: 10.1016/j.ultsonch.2018.04.016
5. Barone J R, Schmidt W F, Gregoire N T (2006) Extrusion of Feather Keratin. J Appl Polym Sci 100: 1432-1442. doi: 10.1002/app.23501
6. Barton S, Bullock C, Weir D (1996) The effects of ultrasound on the activities of some glycosidase enzymes of industrial importance. Enzyme Microb Technol 18: 190-194. doi: 10.1016/0141-0229(95)00092-5
7. Brandelli A (2008) Bacterial Keratinases: Useful Enzymes for Bioprocessing Agroindustrial Wastes and Beyond. Food Bioproc Tech 1: 105-116. doi: 10.1007/s11947-007-0025-y
8. Brandelli A, Daroit D J, Riffel A (2010) Biochemical features of microbial keratinases and their production and applications. Appl Environ Microbiol 85: 1735-1750. doi: 10.1007/s00253-009-2398-5
9. Brandelli A, Sala L, Kalil S J (2015) Microbial enzymes for bioconversion of poultry waste into added-value products. Food Res Int 73: 3-12. doi: 10.1016/j.foodres.2015.01.015

10. Bressollier P, Letourneau F, Urdaci M, Verneuil B (1999) Purification and Characterization of a Keratinolytic Serine Proteinase from *Streptomyces albidoflavus*. *Appl Environ Microbiol* 65: 2570-2578. doi: 10.1128/AEM.65.6.2570-2576.1999
11. Călin M, Constantinescu-Aruxandei D, Alexandrescu E, Răut I, Doni M B, Arsene M L, Oancea F, Jecu L, Lazăr V (2017) Degradation of keratin substrates by keratinolytic fungi. *Electron J Biotechn* 28: 101-112. doi: 10.1016/j.ejbt.2017.05.007
12. Choińska-Pulit A, Łaba W, Rodziewicz A (2019) Enhancement of pig bristles waste bioconversion by inoculum of keratinolytic bacteria during composting. *Waste Manage* 84: 269-276. doi: 10.1016/j.wasman.2018.11.052
13. ECO-SONICS. Desruptor de células. Available in: <https://www.ecosonics.com.br/produto/20/desruptor-de-celulas>. Accessed 02 June 2018.
14. Fang Z, Zhang J, Liu B, Du G, Chen J (2013a) Biodegradation of wool waste and keratinase production in scale-up fermenter with different strategies by *Stenotrophomonas maltophilia* BBE11-1. *Bioresour Technol* 140: 286-291. doi: 10.1016/j.biortech.2013.04.091
15. Fang Z, Zhang J, Liu C, Du G, Chen J (2013b) Biochemical characterization of three keratinolytic enzymes from *Stenotrophomonas maltophilia* BBE11-1 for biodegrading keratin wastes. *Int Biodeterior Biodegrad* 82: 166-172. doi: 10.1016/j.ibiod.2013.03.008
16. Gegeckas A, Šimkutė A, Gudiukaitė R, Čitavičius D J (2018) Characterization and application of keratinolytic paptidases from *Bacillus* *Int J Biol Macromol* 113: 1206-1213. doi: 10.1016/j.ijbiomac.2018.03.046
17. Golunski S M, Scapini T, Modkovski T A, Marques C T, Camargo A F, Preczeski K P, Dalla Rosa C, Baldissarelli D P, Mulinari J, Venturin B, Vargas G D L P, Buffon J G, Mossi A J, Treichel H (2017) Commercial and Noncommercial Peroxidases Activity under Ultrasound and Microwave Treatment: a Pretreatment to Improve Wastewater Treatment. *J Braz Chem Soc* 28: 1890-1895. doi: 10.21577/0103-5053.20170023
18. Grintsevich E E, Adzerikho I E, Mrochek A G, Metelitz D I (2001) Polydisulfides of Substituted Phenols as Effective Protectors of Peroxidase against Inactivation by Ultrasonic Cavitation. *Biochemistry* 66: 740-746. doi: 10.1023/a:1010256511200
19. Gupta R, Ramnani P (2006) Microbial keratinases and their prospective applications: an overview. *Appl Environ Microbiol* 70: 21-33. doi: 10.1007/s00253-005-0239-8
20. Hamiche S, Mechri S, Khelouia L, Annane R, El Hattab M, Badis A, Jaouadi B (2019) Purification and biochemical characterization of two keratinases from *Bacillus amyloliquefaciens* S13 isolated from marine brown alga *Zonaria tournefortii* with potential keratin-biodegradation and hide-unhairing activities. *Int J Biol Macromol* 122: 758-769. doi: 10.1016/j.ijbiomac.2018.10.174

21. Holkar C R, Jain S S, Jadhav A J, Pinjari D V (2018) Valorization of keratin waste. *Process Saf Environ* 115: 85-98. doi: 10.1016/j.psep.2017.08.045
22. Ire F S, Onyenama A C (2017) Effects of Some Cultural Conditions on Keratinase Production by *Bacillus licheniformis* Strain NBRC 14206. *J Adv Biol Biotechnol* 13: 1-13. doi: 10.9734/JABB/2017/32726
23. Jaouadi N Z, Rekik H, Badis A, Trabelsi S, Belhoul M, Yahiaoui A B, Aicha H B, Toumi A, Bejar S, Jaouadi B (2013) Biochemical and Molecular Characterization of a Serine Keratinase from *Brevibacillus brevis* US575 with Promising Keratin-Biodegradation and Hide-Dehairing Activities. *PLoS One* 8: 1-17. doi: 10.1371/journal.pone.0076722
24. Jin J, Ma H, Qu W, Wang K, Zhou C, He R, Luo L, Owusu J (2015) Effects of multi-frequency power ultrasound on the enzymolysis of corn gluten meal: Kinetics and thermodynamics study. *Ultrason Sonochem* 27: 46-53. doi: 10.1016/j.ultsonch.2015.04.031
25. Kapturowska A U, Stolarzewicz I A, Krzyczkowska J (2012) Studies on the lipolytic activity of sonicated enzymes from *Yarrowia lipolytica*. *Ultrason Sonochem* 19: 186-191. doi: 10.1016/j.ultsonch.2011.06.015
26. Kaul S, Sumbali G (1997) Keratinolysis by poultry farm soil fungi. *Mycopathologia* 139: 137-140. doi: 10.1023/a:1006896030739
27. Khan N R, Rathod V K (2018) Microwave assisted enzymatic synthesis of speciality esters: A mini - review. *Process Biochem* 75: 89-98. doi: 10.1016/j.procbio.2018.08.019
28. Kornilowicz-Kowalska T, Bohacz J (2011) Biodegradation of keratin waste: Theory and practical aspects. *Waste Manage* 31: 1689-1701. doi: 10.1016/j.wasman.2011.03.024
29. Kunert K (1989) Biochemical mechanism of keratin degradation by the actinomycete *Streptomyces fradiae* and the fungus *Microsporum gypseum*: A comparison. *J Basic Microbiol* 29: 597-604. doi: [1002/jobm.3620290909](https://doi.org/10.1002/jobm.3620290909)
30. Kushwaha R K S (1983) The In Vitro Degradation of Peacock Feathers by Some Fungi. *Mykosen* 26: 324-326. doi: 10.1111/j.1439-0507.1983.tb03218.x
31. Łaba W, Kopeć W, Chorążyk D, Kancelista A (2015) Biodegradation of pretreated pig bristles by *Bacillus cereus* *Int Biodeterior Biodegrad* 100: 116-123. doi: 10.1016/j.ibiod.2015.02.024
32. Leaes E X, Lima D, Miklasevicius L, Ramon A P, Dal Prá V, Bassaco M M, Terra L M, Mazutti M A (2013) Effect of ultrasound-assisted irradiation on the activities of α -amylase and amyloglucosidase. *Biocatal Agric Biotechnol* 2: 21-25. doi: 10.1016/j.bcab.2012.08.003

33. Leonelli C, Mason T J (2010) Microwave and ultrasonic processing: Now a realistic option for industry. *Chem Eng Process* 49: 885-900. doi: 10.1016/j.cep.2010.05.006
34. Lippert T, Bandelin J, Musch A, Drewes J E, Koch K (2018) Energy-positive sewage sludge pre-treatment with a novel ultrasonic flatbed reactor at low energy input. *Bioresour Technol* 264: 298-305. doi: 10.1016/j.biortech.2018.05.073.
35. Lopes L C, Barreto M T M, Gonçalves K M, Alvarez H M, Heredia M F, Souza R O M A, Cordeiro Y, Dariva C, Fricks A T (2015) Stability and structural changes of horseradish peroxidase: Microwave versus conventional heating treatment. *Enzyme Microb Technol* 69: 10-18. doi: 10.1016/j.enzmictec.2014.11.002
36. Ma H, Huang L, Jia J, He R, Luo L, Zhu W (2011) Effect of energy-gathered ultrasound on Alcalase. *Ultrason Sonochem* 18: 419-424. doi: 10.1016/j.ultsonch.2010.07.014
37. Manasseh R, Tho P, Ooi A, Petrovic-Duran K, Zhu Y (2010) Cavitation microstreaming and material transport around microbubbles. *Phys Procedia* 3: 427-432. doi: 10.1016/j.phpro.2010.01.056
38. Mason T J, Cobley A J, Graves J E, Morgan D (2011) New evidence for the inverse dependence of mechanical and chemical effects on the frequency of ultrasound. *Ultrason Sonochem* 18: 226-230. doi: 10.1016/j.ultsonch.2010.05.008
39. Mazinani S A, DeLong B, Yan H (2015) Microwave radiation accelerates trypsin-catalyzed peptide hydrolysis at constant bulk temperature. *Tetrahedron Lett* 56: 5804-5807. doi: 10.1016/j.tetlet.2015.09.003
40. Mazotto A M, Melo A C N, Macrae A, Rosado A S, Peixoto R, Cedrola S M L, Couri S, Zingali R B, Villa A L V, Rabinovitch L, Chaves J Q, Vermelho A B (2011) Biodegradation of feather waste by extracellular keratinases and gelatinases from *Bacillus* World J Microbiol Biotechnol 27: 1355-1365. doi: 10.1007/s11274-010-0586-1
41. Mazotto A M, Couri S, Damaso M C T, Vermelho A B (2013) Degradation of feather waste by *Aspergillus niger* keratinases: Comparison of submerged and solid-state fermentation. *Int Biodeterior Biodegrad* 85: 189-195. doi: 10.1016/j.ibiod.2013.07.003
42. McClements D J (1995) Advances in the application of ultrasound in food analysis and processing. *Trends Food Sci Tech* 6: 293-299. doi: [1016/S0924-2244\(00\)89139-6](https://doi.org/10.1016/S0924-2244(00)89139-6)
43. Mulinari J, Venturin B, Sbardelotto M, Dall Agnol A, Scapini T, Camargo A F, Baldissarelli D P, Modkovski T A, Rossetto V, Dalla Rosa C, Reichert Jr. F W, Golunski S M, Vargas G D L P, Dalla Rosa C, Mossi A J, Treichel H (2017) Ultrasound-assisted hydrolysis of waste cooking oil catalyzed by *homemade* Ultrason Sonochem 35: 313-318. doi: 10.1016/j.ultsonch.2016.10.007

44. Okoroma E A, Garelick H, Abiola O O, Purchase D (2012) Identification and characterisation of a *Bacillus licheniformis* strain with profound keratinase activity for degradation of melanised feather. *Int Biodeterior Biodegrad* 74: 54-60. doi: 10.1016/j.ibiod.2012.07.013
45. Onifade A A, Al-Sane N A, Al-Musallam A A, Al-Zarban S (1998) A Review: Potentials for biotechnological applications of keratin-degrading microorganisms and their enzymes for nutritional improvement of feathers and other keratins as livestock feed resources. *Bioresour Technol* 66: 1-11. doi: 10.1016/S0960-8524(98)00033-9
46. Ovsianko S L, Chernyavsky E A, Minchenya V T, Adzerikho I E, Shkumatov V M (2005) Effect of ultrasound on activation of serine proteases precursors. *Ultrason Sonochem* 12: 219-223. doi: 10.1016/j.ultsonch.2003.10.012
47. Paul T, Das A, Mandal A, Halder S K, Jana A, Maity C, DasMohapatra P K, Pati B R, Mondal K C (2014) An efficient cloth cleaning property of a crude keratinase combined with detergent: Towards industrial viewpoint. *J Clean Prod* 66: 672-684. doi: 10.1016/j.jclepro.2013.10.054
48. Potapovich M V, Eremin A N, Metelitzka D I (2003) Kinetics of Catalase Inactivation Induced by Ultrasonic Cavitation. *Appl Biochem Micro* 39: 140-146. doi: 10.1023/A:1022577611056
49. Preczeski K P, Kamanski A B, Scapini T, Camargo A F, Modkoski T A, Rossetto V, Venturin B, Mulinari J, Golunski S M, Mossi A J, Treichel H (2018) Efficient and low-cost alternative of lipase concentrating aiming at the application in the treatment of waste cooking oils. *Bioprocess Biosyst Eng* 41: 851-857. doi: 10.1007/s00449-018-1919-y
50. Preczeski K P, Dalastra C, Czapela F F, Kubeneck S, Scapini T, Camargo A F, Zanivan J, Bonatto C, Stefanski F S, Venturin B, Fongaro G, Treichel H (2020) *Fusarium oxysporum* and *Aspergillus* as keratinase producers using swine hair from agroindustrial residues. *Fronti Bioeng Biotech*. doi: 10.3389/fbioe.2020.00071
51. Resa P, Elvira L, Sierra C, Espinosa F M (2009) Ultrasonic velocity assay of extracellular invertase in living yeasts. *Anal Biochem* 384: 68-73. doi: 10.1016/j.ab.2008.09.025
52. Riffel A, Brandelli A (2006) Keratinolytic bacteria isolated from feather waste. *Braz J Microbiol* 37: 395-399. doi: 10.1590/S1517-83822006000300036
53. Rodrigues M I, Iemma A F (2014) Protimiza Experimental Design. Available in: <http://experimental-design.protimiza.com.br/>. Accessed 10 January 2019.
54. Santos R M D B, Firmino A A P, Sá C M, Felix C R (1996) Keratinolytic Activity of *Aspergillus fumigatus* *Curr Microbiol* 33: 364-370. doi: 10.1007/s002849900129
55. Scott J A, Untereiner W A (2004) Determination of keratin degradation by fungi using keratin azure. *Med Mycol J* 42: 239-246. doi: 10.1080/13693780310001644680

56. SIGMA-ALDRICH. K4519 SIGMA Keratinase. Available in: <https://www.sigmaaldrich.com/catalog/product/sigma/k4519?lang=pt®ion=BR>>. Accessed 28 May 2018.
57. Su C, Gong J, Zhang R, Tao L, Dou W, Zhang D, Li H, Lu Z, Xu Z, Shi J (2017) A novel alkaline surfactant-stable keratinase with superior feather-degrading potential based on library screening strategy. *Int J Biol Macromol* 95: 404-411. doi: 10.1016/j.ijbiomac.2016.11.045
58. Thankaswamy S R, Sundaramoorthy S, Palanivel S, Ramudu K N (2018) Improved microbial degradation of animal hair waste from leather industry using *Brevibacterium luteolum* (MTCC 5982). *J Clean Prod* 189: 701-708. doi: 10.1016/j.jclepro.2018.04.095
59. Wang L C (1981) Soybean Protein Agglomeration: Promotion by Ultrasonic Treatment. *J Agr Food Chem* 29: 177-180. doi: 10.1021/jf00103a044
60. Wang J, Yanping C, Sun B, Wang C, Mo Y (2011) Effect of ultrasound on the activity of alliinase from fresh garlic. *Ultrason Sonochem* 18: 534-540. doi: 10.1016/j.ultsonch.2010.09.008
61. Wang F, Chen Z, Zhu H (2013) An efficient enzymatic modification of lily polysaccharide in ionic liquid under ultrasonic irradiation. *Biochem Eng J* 79: 25-28. doi: 10.1016/j.bej.2013.06.020
62. Yadav G D, Borkar I V (2009) Kinetic and Mechanistic Investigation of Microwave-Assisted Lipase Catalyzed Synthesis of Citronellyl Acetate. *Ind Eng Chem Res* 48: 7915-7922. doi: 10.1021/ie800591c
63. Yang C, Fang T J (2015) Kinetics for enzymatic hydrolysis of rice hulls by the ultrasonic pretreatment with a bio-based basic ionic liquid. *Biochem Eng J* 100: 23-29. doi: 10.1016/j.bej.2015.04.012
64. Yusof N S M, Ashokkumar M (2015) Sonochemical Synthesis of Gold Nanoparticles by Using High Intensity Focused Ultrasound. *ChemPhysChem* 16: 775-781. doi: 10.1002/cphc.201402697
65. Yusuf I, Ahmad S A, Phang L Y, Syed M A, Shamaan N A, Khalil K A, Dahalan F A, Shukor M Y (2016) Keratinase production and biodegradation of polluted secondary chicken feather wastes by a newly isolated multi heavy metal tolerant bacterium-*Alcaligenes* AQ05-001. *J Environ Manage* 183: 182-195. doi: 10.1016/j.jenvman.2016.08.059
66. Zou S, Wang X, Chen Y, Wan H, Feng Y (2016) Enhancement of biogas production in anaerobic co-digestion by ultrasonic pretreatment. *Energy Convers Manage* 112: 226-235. doi: 10.1016/j.enconman.2015.12.087

Figures

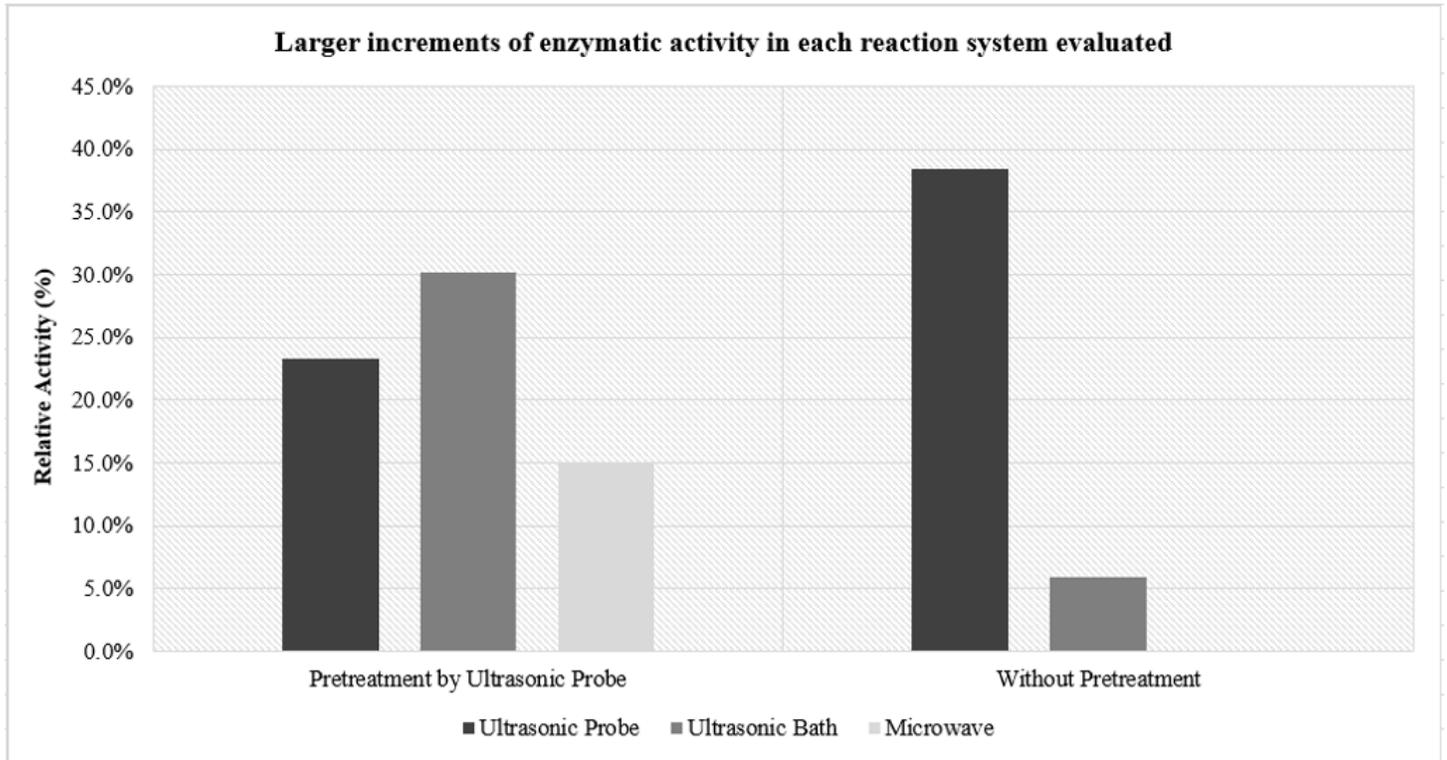


Figure 1

Larger increments of enzymatic activity of enzymatic extracts obtained from swine hair pretreated using the ultrasonic probe and without pretreatment subjected to the reaction systems ultrasonic probe, ultrasonic bath and microwave.

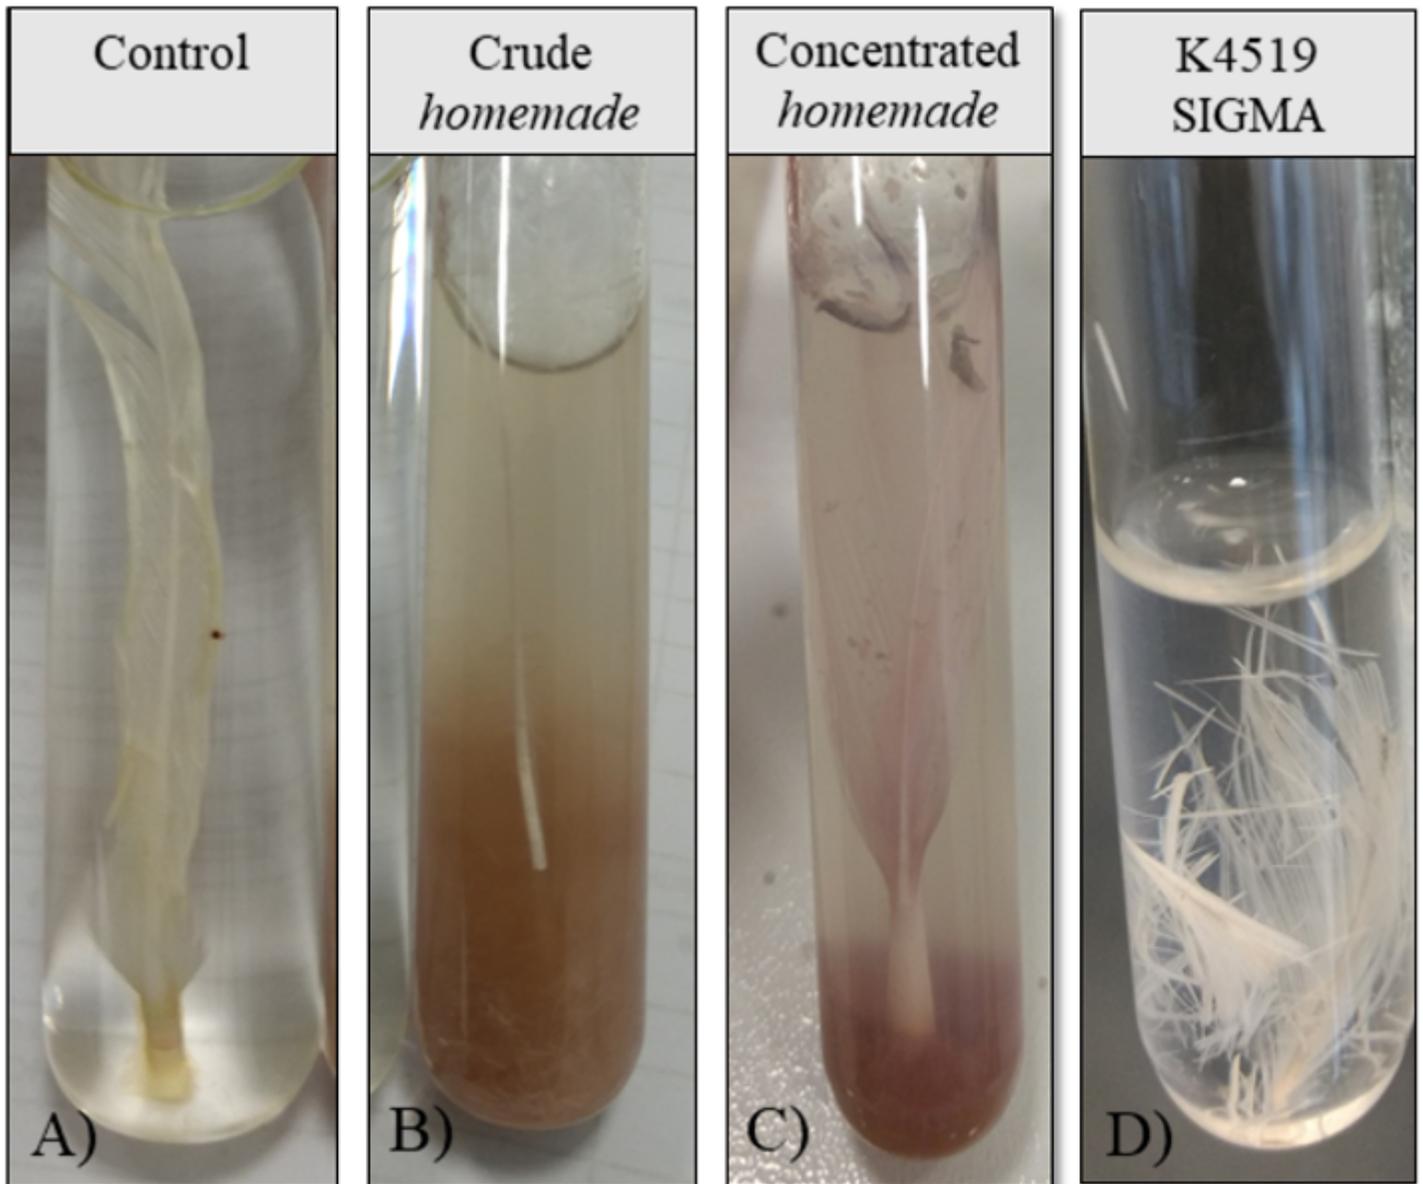


Figure 2

Total degradation of chicken feathers observed in crude enzymatic extracts and after exposure to reaction systems. A) Control; B) Crude; C) Concentrated; D) K4519 SIGMA commercial enzyme.

Supplementary Files

This is a list of supplementary files associated with this preprint. Click to download.

- [GraphicalAbstract.docx](#)