

Compliance-Based Estimation of Seismic Collapse Risk of an Existing Reinforced Concrete Frame Building

Anastasios Tsiavos (✉ tsiavos@ibk.baug.ethz.ch)

ETH Zurich: Eidgenössische Technische Hochschule Zurich <https://orcid.org/0000-0002-5622-800X>

Pascal Amrein

ETH Zurich: Eidgenössische Technische Hochschule Zurich

Nathan Bender

ETH Zürich: Eidgenössische Technische Hochschule Zurich

Bozidar Stojadinovic

ETH Zurich: Eidgenössische Technische Hochschule Zurich

Research Article

Keywords: Seismic evaluation of structures, Compliance factor, Probability of collapse, RC frame buildings

Posted Date: March 15th, 2021

DOI: <https://doi.org/10.21203/rs.3.rs-287402/v1>

License:  This work is licensed under a Creative Commons Attribution 4.0 International License.

[Read Full License](#)

Compliance-based estimation of seismic collapse risk of an existing reinforced concrete frame building

Anastasios Tsiavos¹, Pascal Amrein², Nathan Bender², Bozidar Stojadinovic³

The seismic evaluation of existing structures is based on the determination of the damage likely to occur during the lifetime of these structures due to earthquake ground motion excitation. However, there is not a consensus about the acceptable level of seismic damage, the expected lifetime of these structures, and the seismic hazard level(s) to evaluate the structures at. This paper presents a methodology for the parametric determination of the seismic collapse risk of an existing Reinforced Concrete (RC) frame building based on its seismic code compliance, quantified by a dimensionless metric. This metric, defined as compliance factor, compares the seismic capacity of an existing structure with the seismic demand for a new structure at a predetermined hazard level. The inelastic seismic behavior of four models of the RC frame building of varying compliance was analytically investigated in this study to demonstrate the implementation of the novel methodology. The four models of the RC building were chosen to represent existing RC frame structures, designed and constructed before the introduction of the modern seismic code provisions. These four building models were excited by a group of earthquake ground motion excitations using Incremental Dynamic Analysis (IDA). The collapse probability of the four models of the RC building representing varying values of seismic code compliance was determined for two different locations corresponding to regions of moderate and high seismic hazard, thus laying the basis for the compliance-based estimation of the seismic collapse risk of existing structures.

KEYWORDS

Seismic evaluation of structures, Compliance factor, Probability of collapse, RC frame buildings

1. INTRODUCTION

A large percentage of the existing housing inventory worldwide consists of buildings designed before the adoption and enforcement of the modern seismic design codes. Therefore, most of these buildings do not comply with the current seismic code provisions and are exposed to a higher seismic damage risk compared to a new structure. The seismic evaluation and rehabilitation of these buildings is of utmost importance for the maintenance of public safety as well as for the preservation of the cultural heritage of our communities. However, the seismic evaluation and the prioritization of the seismic retrofitting of a portfolio of existing buildings (Grant et al. 2007, Crowley et al. 2008) necessitate the determination of their seismic vulnerability and seismic risk. The assessment of the seismic vulnerability, as an essential component of the determination of the seismic risk of existing buildings, can be performed using three different approaches: An approach based on seismic damage observed in past earthquake events (Anagnos et al. 1995), an approach based on analytical simulation of the inelastic seismic response of buildings (Silva et al. 2019) and

¹ Lecturer, Department of Civil, Environmental and Geomatic Engineering, ETH Zurich, Switzerland

² Master Student, Department of Civil, Environmental and Geomatic Engineering, ETH Zurich, Switzerland

³ Professor, Department of Civil, Environmental and Geomatic Engineering, ETH Zurich, Switzerland

a third approach, which is defined as hybrid vulnerability assessment and is based on an efficient combination of the advantages of the first two approaches (Kappos et al. 2006).

The lack of adequate seismic damage data from past earthquakes inhibits the sufficiency of the implementation of a pure empirical approach for the assessment of the seismic vulnerability of RC buildings. Hence, a wide range of analytical methodologies have been proposed during the last decades for the determination of fragility curves towards the assessment of the seismic vulnerability of existing RC buildings. Singhal and Kiremidjian (1996) performed nonlinear dynamic analyses of RC frame buildings subjected to artificial ground motion records to propose analytical fragility curves based on the Park-Ang global damage indices (1985). The application of a similar methodology was presented by Masi (2003) for the determination of fragility curves of post-1970 RC buildings designed only for vertical loads, including two additional RC building configurations: RC buildings with masonry infills and Pilotis frames. Zeris et al. (2002, 2006) highlighted the importance of conducting nonlinear dynamic analysis for an accurate estimation of the local inelastic deformation demand of RC frame buildings, designed before the adoption of the modern seismic code provisions. The use of a predetermined, finite number of natural or artificial ground motion records for the derivation of the aforementioned fragility curves leads to a discrete representation of the seismic vulnerability of RC buildings. Nevertheless, the increase of the accuracy of this representation necessitates the use of a large set of ground motion records for the conduction of nonlinear dynamic analysis, which can lead to high computational cost.

In light of the aforementioned limitations, the use of the Capacity Spectrum Method (Fajfar 1999) and the Static Pushover Analysis were proposed for a simplified and highly efficient estimation of the seismic vulnerability of RC buildings (FEMA HAZUS 2003, Borzi et al. 2008, Fardis et al. 2012). Pinho et al. (2006, 2013) presented a comprehensive analysis of the displacement dispersion obtained by five different nonlinear static procedures for the seismic assessment of existing frame buildings. These methodologies provide a continuous representation of the seismic vulnerability of existing buildings and can be easily applied by the civil engineering community due to their simplicity (D'Ayala et al. 2015, Beyer et al. 2015). However, these methods do not consider the dynamic effect of earthquake ground motion excitation on the inelastic response and seismic damage of existing buildings.

The use of Incremental Dynamic Analysis-IDA (Vamvatsikos and Cornell 2002) emerged from the necessity for a fine balance between the consideration of ground motion variability and the continuous representation of the seismic vulnerability of RC buildings. A software tool (SPO2IDA) was proposed by Vamvatsikos and Cornell (2006) to simplify the use of IDA and reduce its computational cost. Chaulagain et al. (2016) employed SPO2IDA for the assessment of the seismic vulnerability of RC frame buildings in Nepal. Dolšek (2008, 2010) developed a software tool based on Matlab (MathWorks 2007) and OpenSees (McKenna et al. 2000), which automates the application of IDA for the seismic performance assessment of RC frames. Zeris and Repapis (2018) compared the use of Static Pushover Analysis and Incremental Dynamic Analysis for the assessment of the seismic performance of existing RC frame buildings.

A common theme across the aforementioned studies is the significant dependence of the fragility curves on the compliance of the RC structure to the seismic code provisions, which is usually defined on a qualitative basis. However, the use of a normalized metric for the quantification of the compliance of these buildings to seismic code provisions would shed more light in the correlation between the code compliance of these buildings and their seismic vulnerability. The quantification of this correlation would make these curves comparable with other fragility curves developed for similar building configurations subjected to the same seismic code provisions.

Furthermore, the quantification of the code compliance of these buildings can lead to the determination of their seismic collapse risk (Elwood et al. 2012, Liel et al. 2017, Dolšek et al. 2017, Žižmond and Dolšek 2019, Shahnazaryan and O'Reilly 2021) and can justify the application of seismic retrofitting towards the mitigation of this risk (Galanis et al. 2018). However, the assessment of seismic code compliance of existing buildings on a qualitative basis inhibits the accurate estimation of the implications of their compliance on their seismic collapse risk.

In view of this challenge, the use of ratios that express the capacity of an existing structure over its seismic demand has been proposed by several researchers in the past to provide a quantitative probabilistic framework for the performance-based seismic evaluation of existing structures. Cornell et al. (2002) and Jalayer and Cornell (2002) suggested the use of the ratio of the factored demand over the factored capacity of an existing structure, considering aleatory and epistemic uncertainties. Jalayer et al. (2007) proposed the use of this ratio for the structural element that corresponds to the most critical failure mechanism for the system. A simplified form of this ratio that utilizes a seismic design spectrum for the determination of the seismic demand is defined in the Swiss Seismic Code Provisions (SIA 2017) to quantify the seismic code compliance of existing structures. This ratio α_s denotes the strength-based compliance factor of an existing structure, defined as (SIA 2017):

$$\alpha_s = \frac{C_e}{C_c} \quad (1)$$

where C_e represents the seismic strength capacity of an existing structure and C_c denotes the seismic strength demand for a new, code-compliant structure designed at the same location. The corresponding displacement-based compliance factor of an existing structure is defined as (SIA 2017):

$$\alpha_D = \frac{D_e}{D_c} \quad (2)$$

where D_e represents the seismic displacement capacity of an existing structure and D_c denotes the seismic displacement demand for a new, code-compliant structure designed at the same location. Within this frame, the determination of the strength- and displacement-based compliance of an existing structure can be demonstrated using a base shear coefficient C_b vs. displacement S_d spectrum in a format similar with the Capacity Spectrum method (Freeman et al. 1975, Freeman 1998) and the N2 method (Fajfar 1999): Fig. 1, Fig. 2 and Fig. 3 illustrate the determination of the compliance of three types of seismically deficient existing structures, assuming in the general case that the strength of the existing and the corresponding new, code-compliant structures (expressed in terms of base shear coefficient $C_b=S_d/g$) are lower than the strength demand given by an elastic design spectrum $C_{c,elastic}$.

Fig. 1 shows this determination for a strength- and displacement-deficient existing structure, whose strength capacity C_e and displacement capacity D_e are both lower than the corresponding demand values C_c and D_c determined for a new structure at the same location, so that $\alpha_s < 1$ and $\alpha_D < 1$ (Eq. 1, Eq. 2). The aforementioned capacity values C_e and D_e are obtained from the idealized pushover curve of the equivalent SDOF system of the existing structure (EC8 2004, Fajfar 1999). The corresponding displacement demand D_c is derived by the intersection (Demand Point DP_c) of the inelastic demand spectrum for the new, code-compliant structure with the idealized pushover curve of the new structure with strength C_c and displacement capacity $D_{c,ult}$. Fig. 2 elucidates the

determination of the compliance of a strength-deficient existing structure ($\alpha_s < 1$) whose displacement capacity is greater than the demand for a new structure ($\alpha_D > 1$). The compliance of a displacement-deficient existing structure ($\alpha_D < 1$) is shown in Fig. 3 for the case of $\alpha_s = 1$, representing cases in which the existing structure has the same strength with the new structure, but lower displacement capacity.

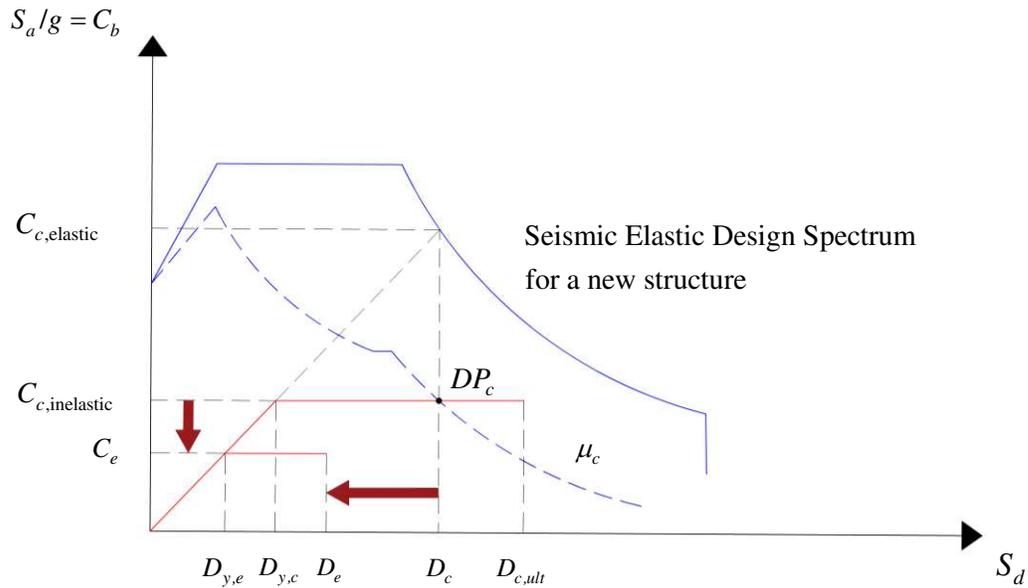


Fig. 1. Strength-based compliance factor α_s and displacement-based compliance factor α_D for a strength- and displacement-deficient existing structure ($\alpha_s < 1$, $\alpha_D < 1$).

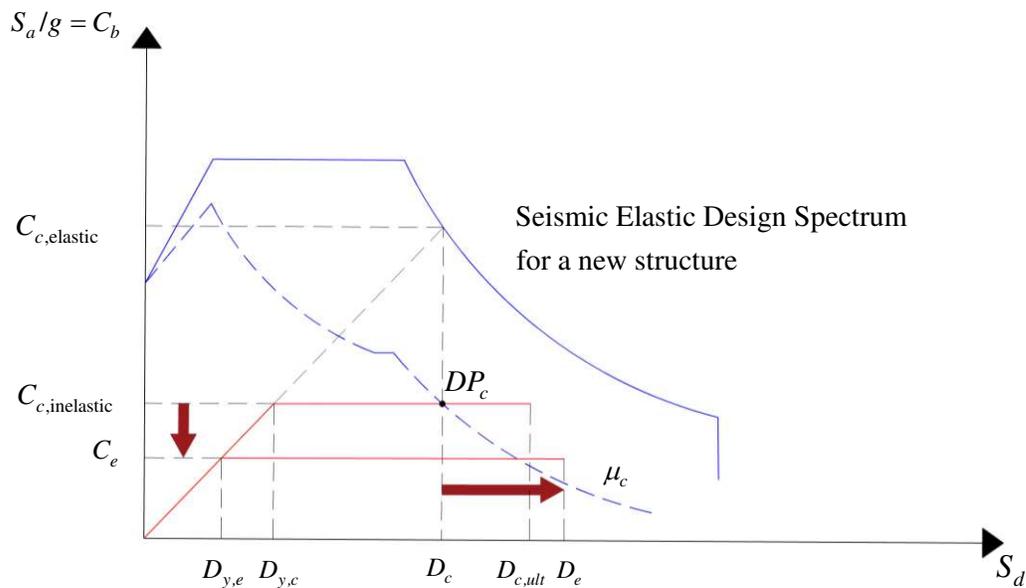


Fig. 2. Strength-based compliance factor α_s and displacement-based compliance factor α_D for a strength-deficient existing structure ($\alpha_s < 1$, $\alpha_D > 1$).

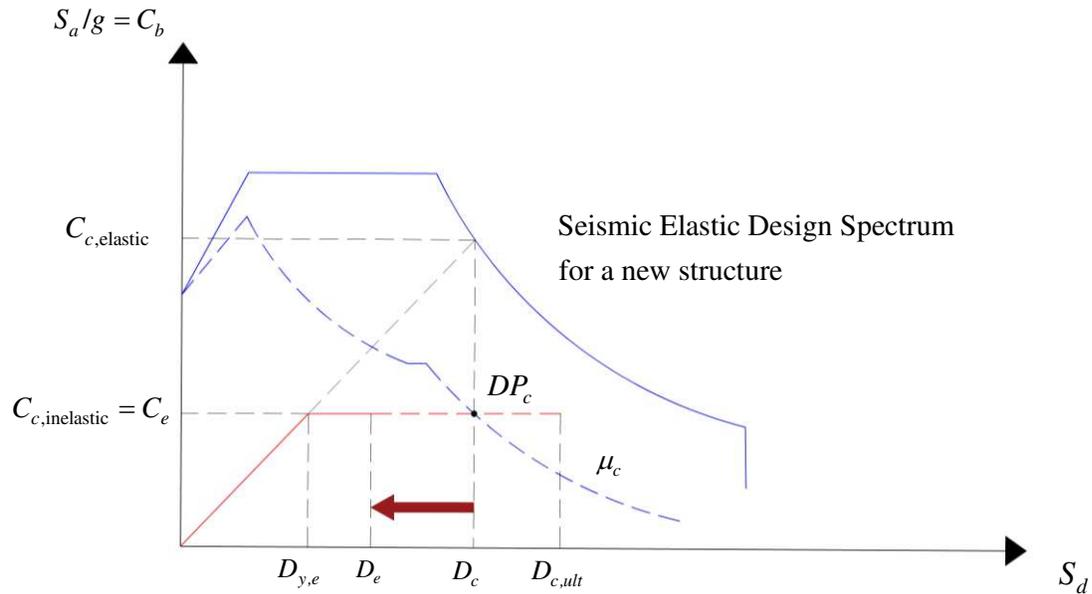


Fig. 3. Strength-based compliance factor α_s , and displacement-based compliance factor α_D for a displacement-deficient existing structure ($\alpha_s=1$, $\alpha_D<1$).

Tsiavos et al. (2018) and Bender et al. (2017, 2019) proposed the use of compliance factors for the estimation of seismic risk of existing structures using constant-period and constant-yield-displacement approaches (Tsiavos and Stojadinovic 2019). Nevertheless, the simplified fragility curves used in these studies limited their application spectrum to brittle structures, which collapse immediately after the exceedance of a predetermined ground motion intensity measure. In an extension, this study aims to integrate the compliance factor-based metric in a comprehensive approach for the estimation of the seismic collapse risk of existing RC frame buildings.

Along these lines, the goal of this study is to parametrize the probability of collapse of existing buildings using strength-based compliance factors and to derive compliance-based fragility curves that represent the behavior of a typical example of RC frame buildings, constructed before the adoption of modern seismic code provisions. The illustration of this correlation between compliance and seismic risk will lay the basis for the risk-based seismic evaluation of existing structures and the decision making about the seismic retrofit of these structures, based on a targeted seismic risk level that is accepted by our communities.

2. METHODOLOGY

The methodology proposed in this paper includes three steps:

1. Estimation of seismic hazard in the location of the RC building
2. Determination of the compliance of the RC building to the existing seismic code provisions
3. Quantification of the seismic risk of the RC building, expressed by its probability of collapse

2.1 Estimation of seismic hazard in the location of the RC building

The first step of the proposed methodology comprises the estimation of the seismic hazard in the location of the building through the use of seismic hazard curves: These curves show the probability that an earthquake intensity level is exceeded during a predetermined time period. The Peak Ground Acceleration (PGA) was used as an intensity measure in this study. Two different locations have been chosen to represent the effect of two different seismic hazard levels on the seismic risk of existing RC buildings: Sion, Switzerland and Athens, Greece. The seismic hazard curves for both regions are determined using the seismic hazard platform of the European Facilities for Earthquake Hazard and Risk (EFEHR 2017) and are shown in Fig. 4.

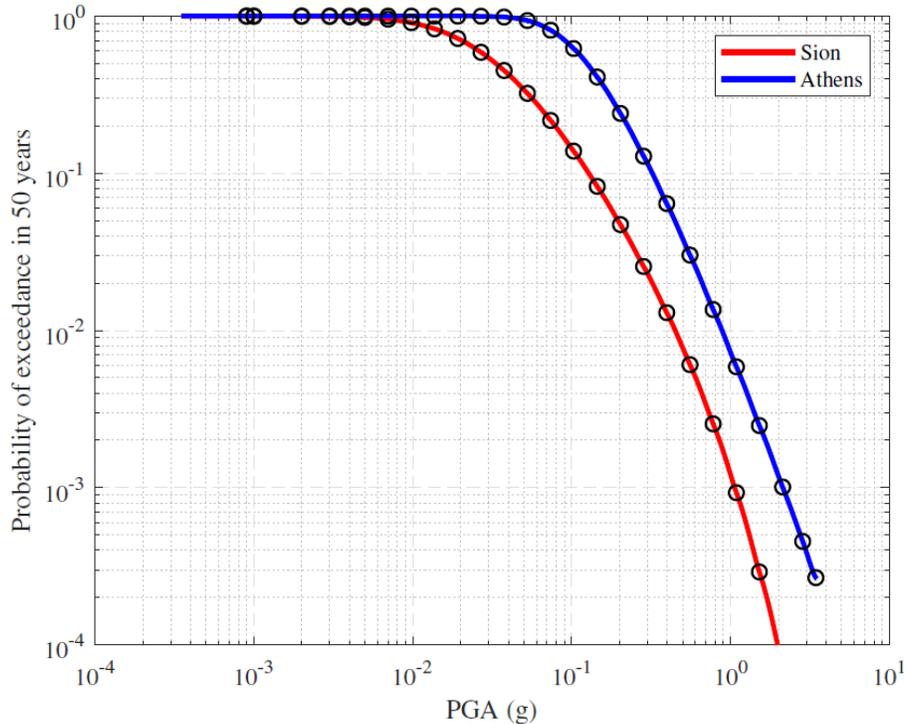


Fig. 4. Seismic hazard curves for Sion (Switzerland) and Athens (Greece).

2.2 Determination of the compliance of the RC building to the existing seismic code provisions

2.2.1 Numerical simulation of the RC building

The second step of the methodology proposed in this study consists of the determination of the strength-based compliance factor α_s of a RC building through the numerical simulation of the inelastic behavior of the building.

A four-storey RC frame building with masonry infills (Dolšek 2010) was chosen to simulate the design standards for RC frame buildings constructed between 1970-1980, thus illustrating the methodology proposed in this study. The geometry and the reinforcement of the building, defined as Model A, are shown in Fig. 5. The slab thickness is 15cm. The concrete quality used for the construction of the building is C25/30, while the quality of the steel reinforcement is B500. The floor masses of the building are: 87 t (first floor), 86 t (second and third floor) and 83 t (fourth floor). The design base shear of the building is 529 kN (Fardis 1996).

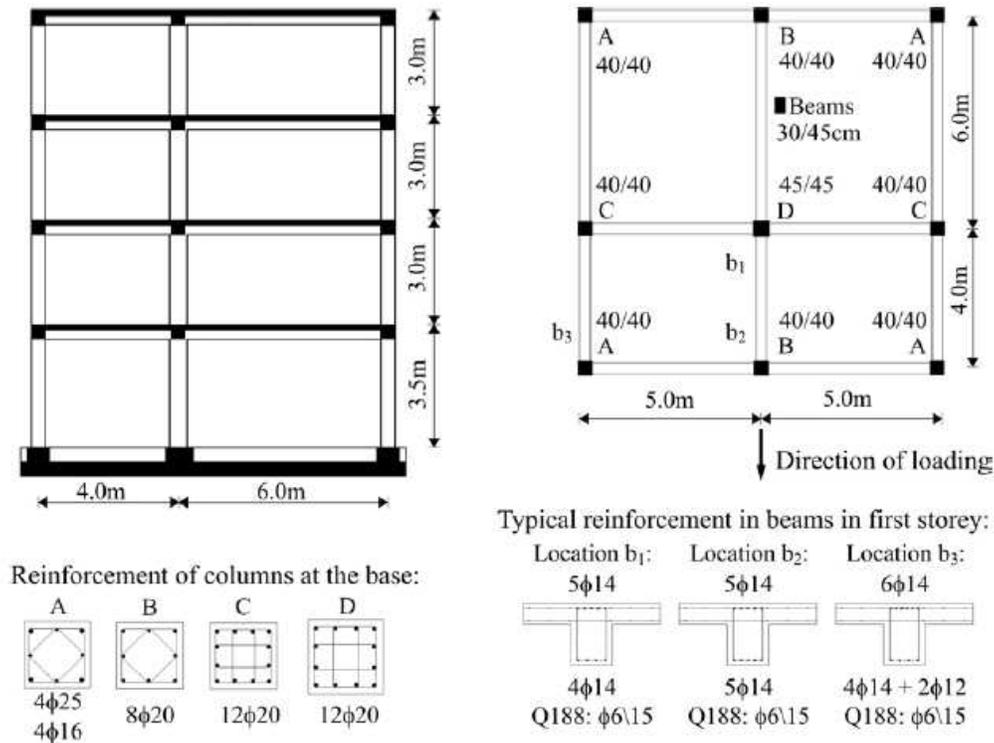


Fig. 5. Four-storey RC building designed by Fardis (1996) according to EC8 and investigated by Dolšek (2008, 2010).

The numerical model of the building was generated using OpenSees (McKenna et al. 2000) and the PBEE toolbox (Dolšek 2010) and consists of beam and column elements. The floor slabs are assumed to be rigid in their plane.

2.2.2 Moment-rotation relation

The use of the PBEE toolbox (Dolšek 2010) enabled the simulation of the inelastic behavior of the columns and beams of the existing RC frame building using plastic hinges with a trilinear moment-rotation relation and material softening (Dolšek 2008). The plastic hinges, modelled as zero-length elements are introduced in the beginning and the end of each structural element of the model (Amrein 2020, Dolšek 2008), using a uniaxial hysteretic material model (Mazzoni et al. 2006).

2.2.3 Pushover curve

The force distribution for the application of the horizontal, incrementally increasing static load to the RC frame building is determined by the multiplication of the fundamental mode shape with the floor masses. The pushover curve for the building presented in Fig. 5 is shown in Fig. 6 and is similar to the one obtained by Dolšek (2008) for the same building. A bilinear approximation of the pushover curve is presented on the same Figure. This bilinear approximation is based on the principle of equal areas under the curves (Fajfar 1999), considered up to the point where the first significant drop in strength (usually about 20%) occurs in the nonlinear, actual pushover curve, as proposed by Kappos et al. (2006) and Kappos and Panagopoulos (2010).

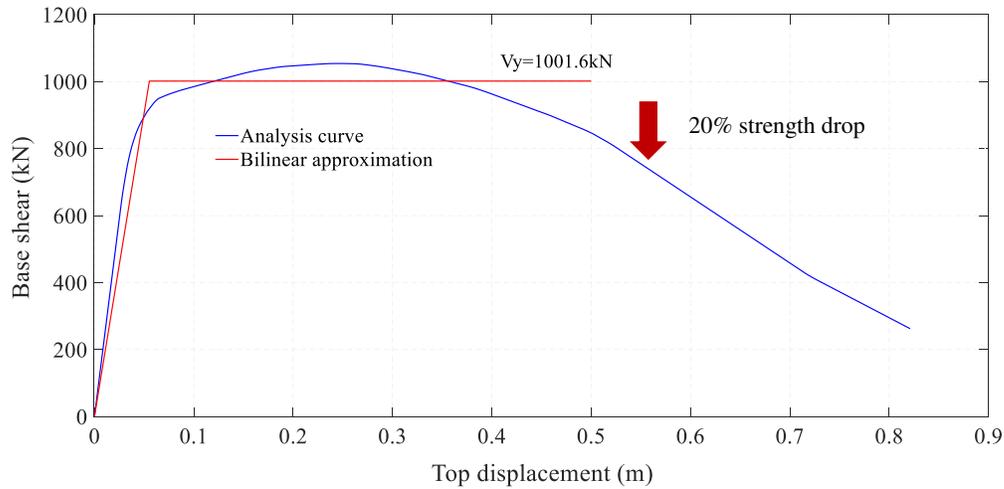


Fig. 6. Analytical and bilinearized pushover curve of the RC frame building.

2.2.4 Determination of the strength-based compliance of the RC building

The strength-based compliance factor α_s of the RC building (Eq. 1) was used to define and parametrize its seismic compliance. The elastic seismic design spectra for a new building located in Athens, Greece (Soil Class A, ZII, $\alpha_{gd}=0.24g$) and a new building located in Sion, Switzerland (Soil Class B, Z3b, $\alpha_{gd}=0.16g$) are used to define the base shear coefficient demand C_c and are presented in Fig. 7, using the spectrum format presented in Fig. 1, Fig. 2 and Fig. 3. The EC8 (2004) elastic design spectrum for $\alpha_{gd}=0.24g$ is presented in the same Figure. The use of elastic design spectra was chosen for the definition of the code-compliant new building as a special case of the inelastic design approach shown in Fig. 1, Fig. 2 and Fig. 3 to facilitate a consistent comparison between the seismic design spectra corresponding to Sion, Athens and EC8 (2004).

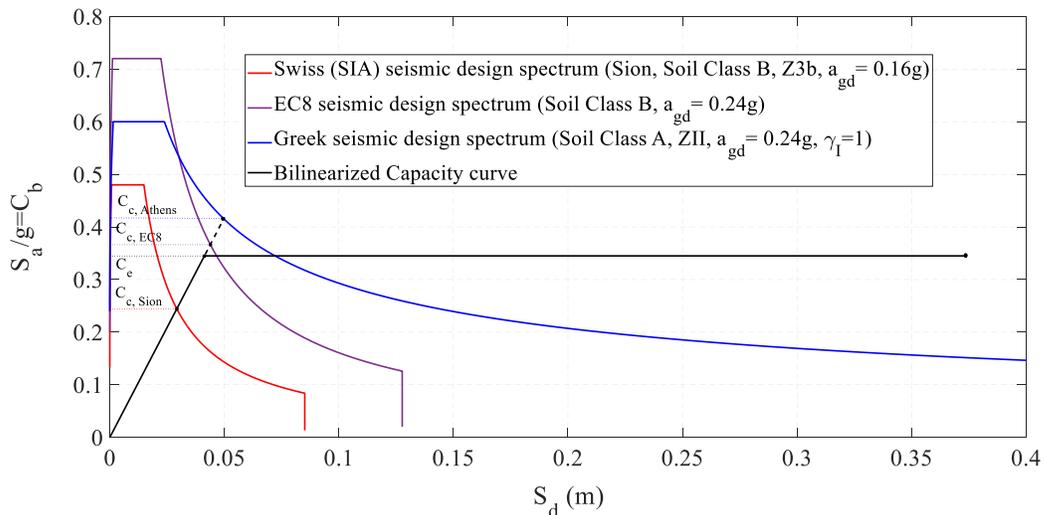


Fig. 7. Determination of the compliance of the RC frame building to seismic code provisions.

The base shear coefficient-displacement (C_b - S_d) capacity of the building is derived by the transformation of the MDOF system to a SDOF system, prescribed by EC8 (2004), using the values derived from the eigenvalue analysis for the numerically simulated building $\Gamma=1.34$ and

$m^*=217.44$ t. However, a linear fundamental mode shape can be assumed in the general case to relate the interstorey drift, the maximum displacement and the displacement of the equivalent SDOF system of the building S_d , when a finite element model of the building is not available. As shown in Fig. 7, the strength capacity of the existing building is $C_e=0.35$, while the corresponding demand for a new building designed in Athens is $C_c=0.42$. Hence, the strength-based compliance factor of the building is $\alpha_s=0.35/0.42=0.84$ (Eq. 1) for Athens, while the corresponding value for Sion is $\alpha_s=0.35/0.25=1.4$. The EC8-based compliance factor for $\alpha_{gd}=0.24g$ is $\alpha_s=0.35/0.37=0.95$.

2.3. Quantification of the seismic risk of the RC building

The last step of the proposed methodology comprises the compliance-based determination of the seismic risk of the building, expressed by its probability of collapse.

2.3.1 Incremental Dynamic Analysis

Incremental Dynamic Analysis (Vamvatsikos and Cornell 2002) is used in this study to determine the maximum interstorey drift of the RC frame building presented in Fig. 5 for varying values of the chosen Intensity Measure (PGA). Each IDA curve is derived from the nonlinear dynamic analysis of the RC building subjected to an incrementally scaled ground motion record and comprises 20 points. These points correspond to 20 increments of the PGA of the scaled record, as performed by Tsiavos and Stojadinovic (2016). The scaling is automated by the PBEE toolbox using a hunt and fill algorithm developed by Vamvatsikos and Cornell (2004). The ground motion ensemble chosen for the conduction of the IDA comprises 12 ground motions, obtained from the PEER ground motion database (2018). The ground motion ensemble is shown in Table 1.

Table 1. List of recorded earthquake ground motions (PEER NGA Database, 2018) used for the excitation of the RC frame building.

No.	Date	Earthquake	Station	M_w	R (km)
1	28/6/1966	Parkfield	Cholame - Shandon Array 12	6.19	17.64
2	15/10/1979	San Fernando	Palmdale Fire Station	6.61	24.16
3	23/11/1980	Irpinia	Auletta	6.2	28.69
4	23/11/1980	Irpinia	Rionero In Vulture	6.2	22.68
5	08/07/1986	N. Palm Springs	Joshua Tree	6.06	23.2
6	21/07/1986	Chalfant Valley	Benton	5.77	24.25
7	21/07/1986	Chalfant Valley	Bishop - Paradise Lodge	5.77	14.99
8	21/07/1986	Chalfant Valley	Lake Crowley - Shehorn Res.	5.77	24.37
9	01/10/1987	Whittier Narrows	Pomona - 4th & Locust FF	5.99	25.11
10	17/08/1999	Duzce	Lamont 1061	7.14	11.46
11	17/01/1994	Northridge	Castaic - Old Ridge Route	6.05	29.29
12	21/09/1999	Chi-Chi	TCU073	6.2	19.06

2.3.2 Collapse limit state criterion

The interstorey drift ratio of 4% is determined as the collapse limit state criterion in this study, as presented by Kappos et al. (2006). For each ground motion, the collapse intensity is determined as the intensity, for which the maximum interstorey drift exceeds the predetermined interstorey drift ratio of 4%. The IDA curves corresponding to the 12 ground motions used in this study and a vertical line denoting the selected drift-based collapse criterion are shown in the following Fig. 8.

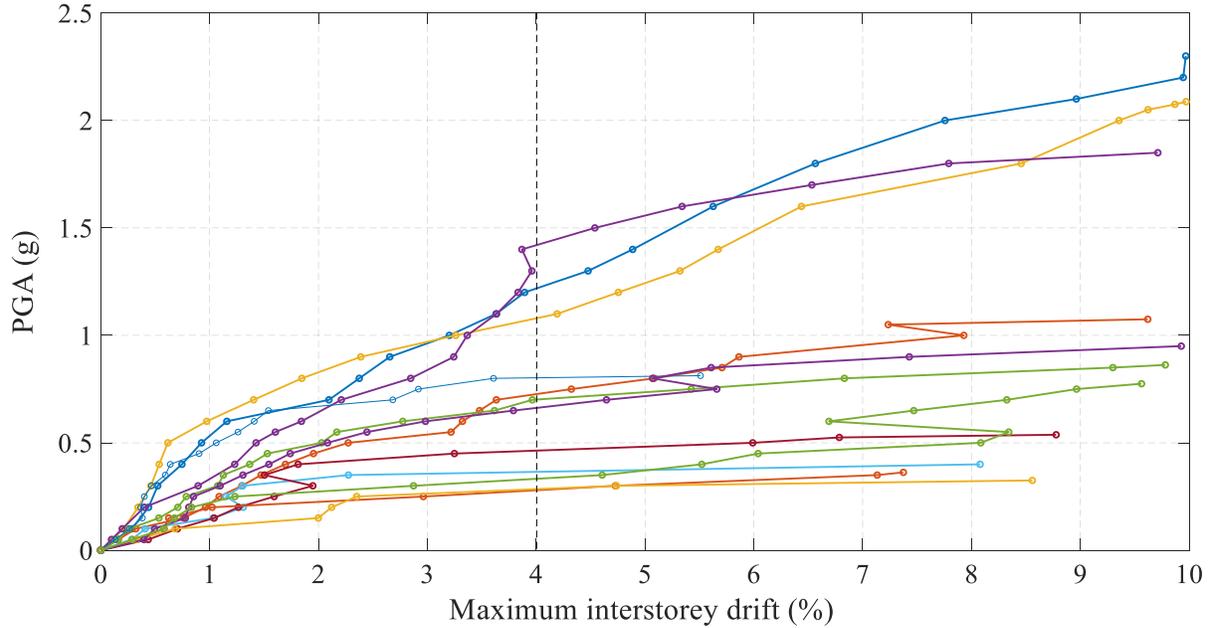


Fig. 8. IDA curves of the RC frame building.

2.3.3 Fragility Curve

The collapse fragility curve of the RC building for each value of the selected intensity measure (PGA) is derived by the probability of exceedance of the drift-based collapse criterion for this intensity, based on the results of the IDA curves (Fig. 8).

Assuming a lognormal distribution, the corresponding parameters can be estimated from the obtained collapse intensities (Baker 2015). The cumulative distribution function and the corresponding parameters (θ , β) are determined using Equations 3, 4 and 5:

$$P(C | IM = x) = \Phi\left(\frac{\ln(x/\theta)}{\beta}\right) \quad (3)$$

$$\ln(\theta) = \frac{1}{n} \sum \ln(IM_i) \quad (4)$$

$$\beta = \sqrt{\frac{1}{n-1} \sum (\ln(IM_i / \theta))^2} \quad (5)$$

The fragility curve of the building presented in Fig. 5, derived through the aforementioned procedure (Amrein 2020), is shown in Fig. 9.

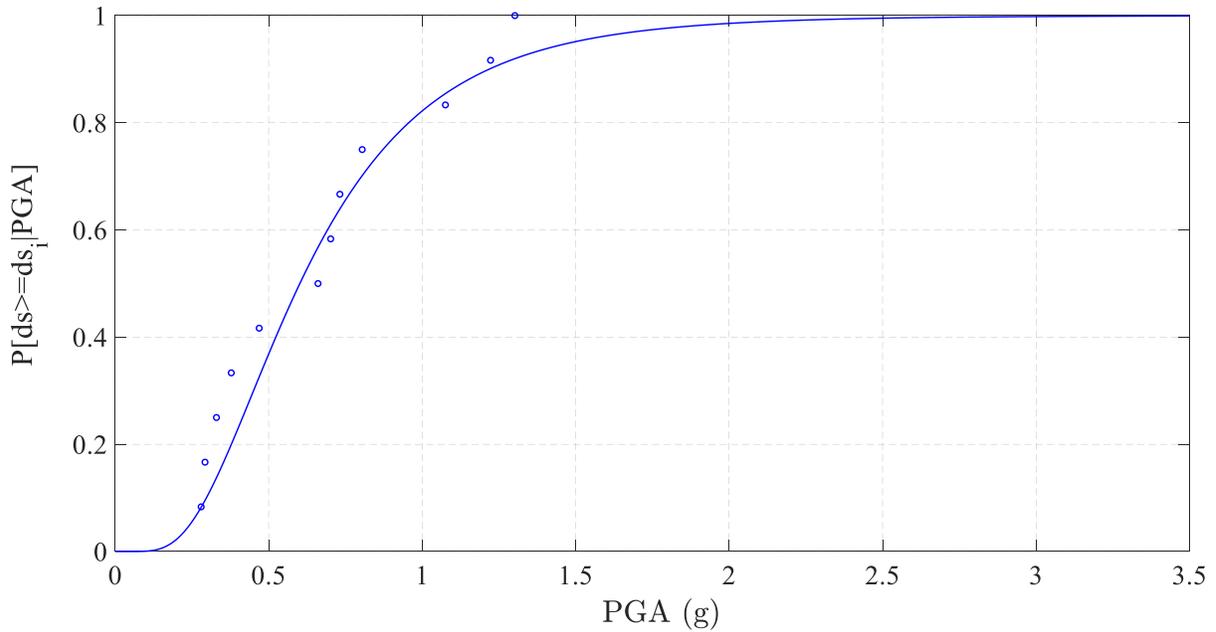


Fig. 9. Fragility curve of the RC frame building.

2.3.4 Probability of collapse

The mean annual rate of collapse can be calculated through the integration of the fragility curve of the building (Fig. 9) over the seismic hazard curve (Fig. 1) using Eq. 6 (Eads et al. 2013):

$$\lambda_c = \sum_1^{\infty} P(C | im_i) \cdot \left| \frac{d\lambda_{IM}(im_i)}{d(im)} \right| \cdot \Delta im \quad (6)$$

The probability of collapse during the service life of the building T_L can be then calculated using Eq. 7, assuming that the occurrence of earthquakes in time follows a Poisson distribution (Eads et al. 2013):

$$P_c \text{ (in } T_L \text{ years)} = 1 - e^{-\lambda_c \cdot T_L} \quad (7)$$

The derived probability of collapse of the building (Model A) for varying values of its service life and two different locations (Sion and Athens) is shown in Fig. 10. As shown in the Figure, the compliance factor of the building located in Sion $\alpha_s=1.40$ leads to a probability of collapse of 1% in 50 years. However, the location of the same building in a region of higher seismic hazard, such as Athens, with a compliance $\alpha_s=0.83$ corresponds to a five times higher probability of collapse: 5% in 50 years. This result is in accordance with the investigation of Kappos et al. (2007), who determined the economic losses attributed to RC frame structures of low code-compliance subjected to the 1999 Athens earthquake.

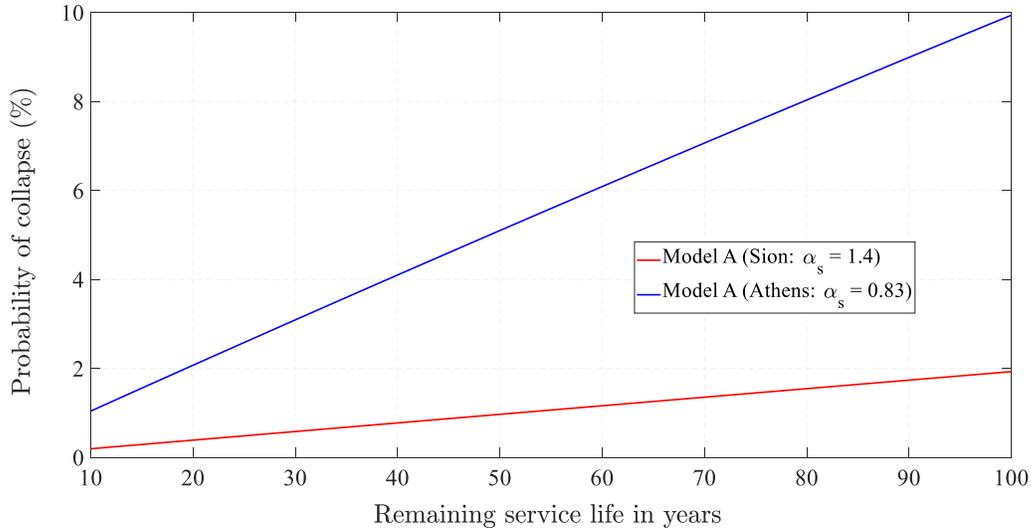


Fig. 10. Probability of collapse of the RC frame building for varying values of the service life T_L and two different locations: Sion (Switzerland) and Athens (Greece).

3. PARAMETRIC INVESTIGATION

A parametric investigation was performed in this study following the proposed methodology to extend the results obtained for one building to four RC frame buildings of varying compliance. Thus, the longitudinal reinforcement of the RC frame building shown in Fig. 5 (Model A) was reduced to represent three additional RC frame building classes of lower seismic code compliance, denoted as Model B, Model C and Model D. The longitudinal reinforcement diameters and the strength-based compliance factors α_s of the four models according to the Swiss and the Greek seismic code provisions are shown in Table 2. The pushover curves of the buildings for varying values of their compliance, defined according to Greek seismic code provisions, are presented in Fig. 11.

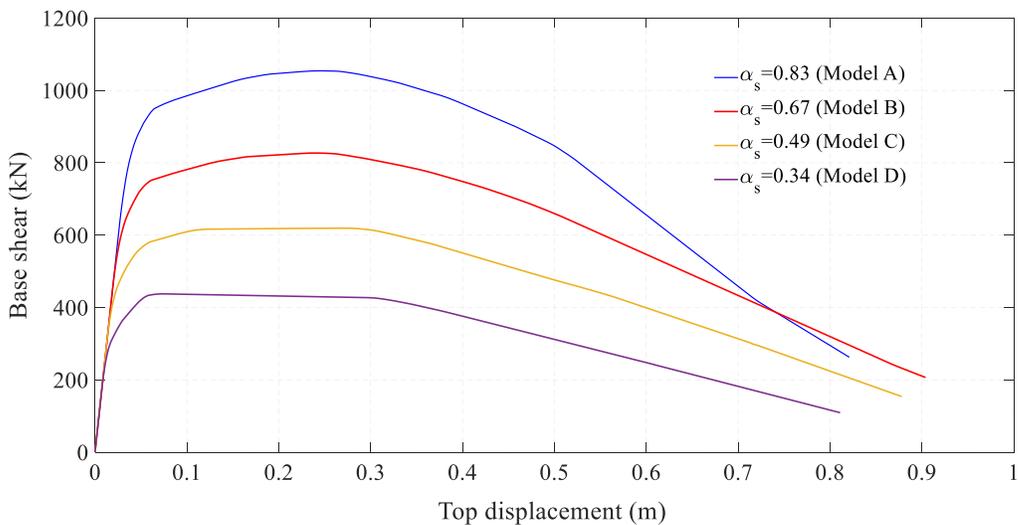


Fig. 11. Pushover curves for building models A, B, C and D (compliance factors per Greek seismic code provisions).

Table 2. Longitudinal reinforcement diameters and compliance factor values for the four building models.

	Column	Beam	Compliance factor α_s (Swiss Code Provisions)	Compliance factor α_s (Greek Code Provisions)
Model A	Ø25/ Ø20	Ø14/ Ø12	1.40	0.83
Model B	Ø22/ Ø18	Ø12/ Ø10	1.18	0.67
Model C	Ø20/ Ø16	Ø10/ Ø18	0.92	0.49
Model D	Ø18/ Ø14	Ø8/ Ø8	0.62	0.34

3.1 IDA curves of the four building models of varying compliance

The IDA curves for the four buildings types of varying seismic code compliance, defined according to the Greek seismic code provisions, are shown in Fig. 12. As presented in the figure, the dynamic instabilities manifested by increased values of drift for small intensity increments are observed for more ground motions when the seismic code compliance decreases. These instabilities indicate more extensive structural collapse (Vamvatsikos and Cornell 2002, D’Ayala et al. 2015) for decreased seismic code compliance and can be more clearly illustrated in the fragility curves shown in Fig. 13 for the four selected building models of varying code compliance.

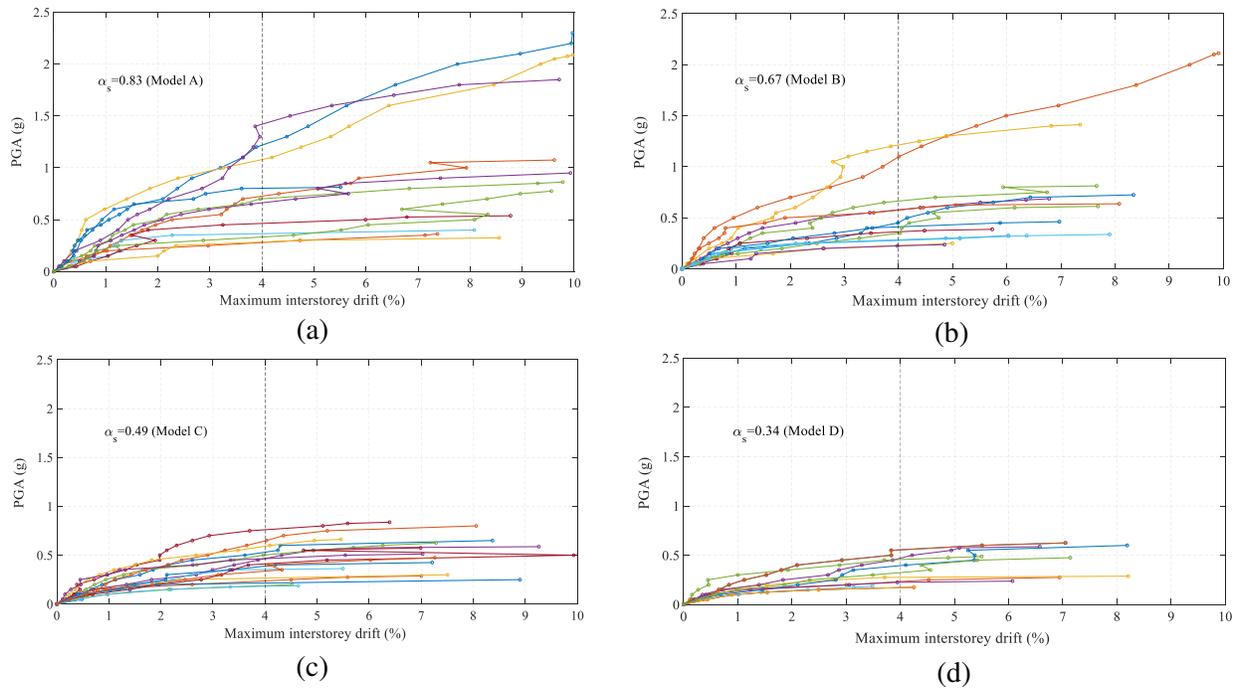


Fig. 12. IDA curves for (a) Model A, (b) Model B, (c) Model C and (d) Model D.

3.2 Fragility curves of the four building models of varying compliance

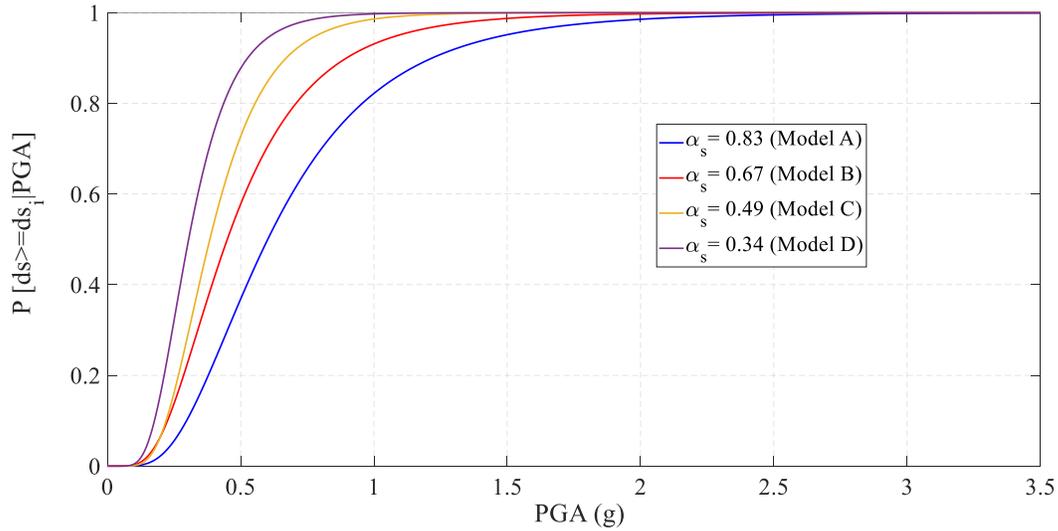


Fig. 13. Fragility curves for building models A, B C and D (compliance factors per Greek seismic code provisions).

As shown in Fig. 13, the fragility curves become steeper due to a decrease of the code compliance from 0.83 to 0.67 (Model A to Model B) indicating higher probability of exceedance of the collapse limit state for these buildings at all intensity levels. This increase of the probability of exceedance manifests itself only for intensities (PGA) exceeding 0.25g when the code compliance is further reduced from 0.67 to 0.49 (Model B to Model C). However, this collapse probability increase due to a reduction of the compliance factor from 0.49 to 0.34 (Model C to Model D) is more uniform and intensity-independent.

3.3 Probability of collapse of the four building models of varying compliance

The mean annual rate of collapse of each of the four buildings λ_c is calculated through the integration of the fragility curve of the building (Fig. 13) over the seismic hazard curve using Eq. 6 (Eads et al. 2013). The emerging deaggregation of the collapse rate λ_c is shown in Fig. 14 for Sion, Switzerland and in Fig. 16 for Athens, Greece. As presented in both Figures, the ground motion intensity, at which the maximum annual rate of collapse occurs, shifts from the initial value of PGA=0.35g to smaller intensities when the code compliance of the building decreases, leading to a PGA=0.25g for Model D ($\alpha_s=0.41$, according to the Greek seismic code provisions).

Along these lines, the low seismic code compliance of RC buildings increases the spectrum of ground motions that can lead to collapse of these buildings, thus increasing their seismic vulnerability and seismic risk, as shown by Iervolino et al. (2007). This increase of seismic risk for lower values of compliance is expressed through the estimation of the corresponding probabilities of collapse during the service life for Sion and Athens locations shown in Fig. 15 and Fig. 17, respectively. The decrease of the compliance factor from $\alpha_s=1.40$ to $\alpha_s=0.62$ leads to an increase of the collapse probability for a 50 year service life from 1% to 3% for Sion. This increase of collapse probability for a decrease of the corresponding compliance factor from $\alpha_s=0.83$ to $\alpha_s=0.34$ is much more pronounced for regions of high seismic hazard, such as Athens, where the collapse probability increases from 5% to 15% for a 50 year service life.

The American Seismic Code Provisions (ASCE 7 2016, ASCE 41 2017, Luco et al. 2007) prescribe a risk-based ground motion selection procedure for the design of new structures that corresponds to an accepted level of seismic risk, expressed by a probability of collapse of 1% in 50 years. Interestingly, the investigated RC frame building with compliance $\alpha_s=1.40$ located in Sion corresponds roughly to this allowable seismic risk level with a probability of collapse of 0.97% in 50 years (Fig. 15). However, locating the same RC frame building in Athens leads to reduced code compliance expressed by strength-based compliance factor values below 1, which are associated with probabilities of collapse that are significantly higher than the aforementioned value of 1% in 50 years (Fig. 17).

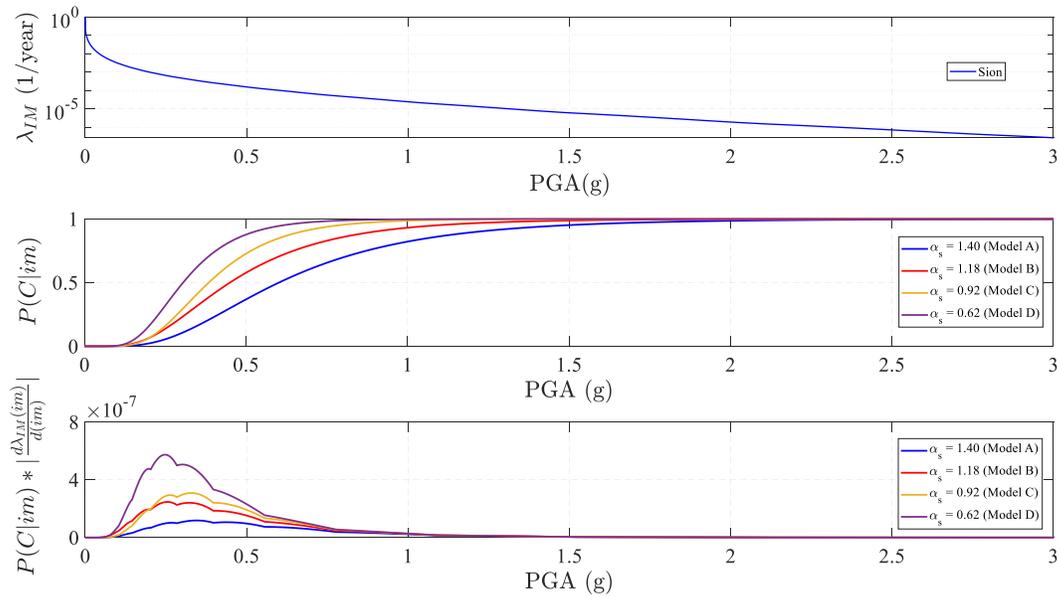


Fig. 14. Deaggregation of mean annual collapse rate λ_c for Sion, Switzerland.

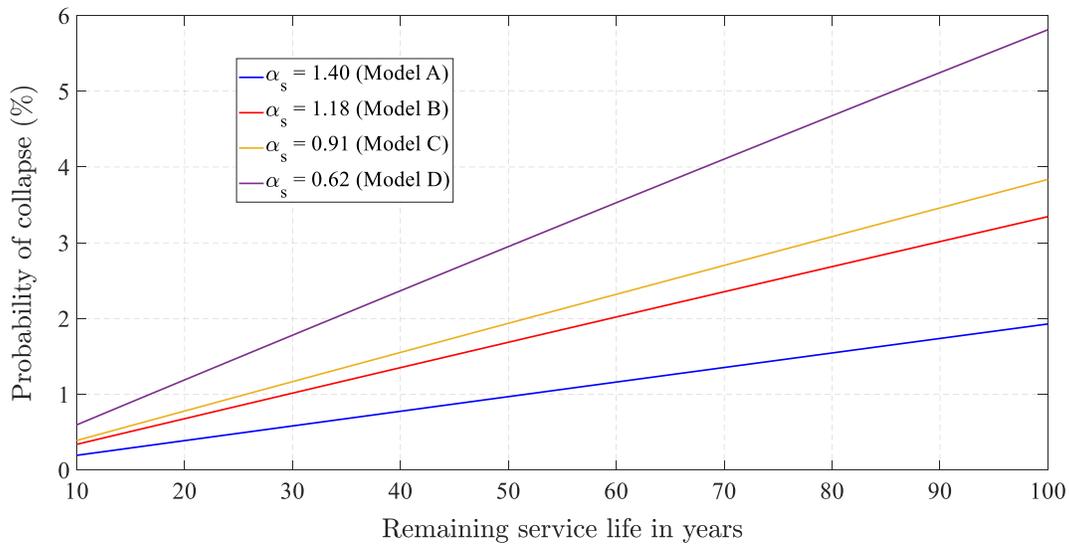


Fig. 15. Probability of collapse of RC frame buildings of varying compliance located in Sion.

Within this frame, the presented compliance-based, seismic risk assessment of existing structures should not be building-specific, but also location-dependent: Different communities will be led to different seismic assessments and different optimal seismic retrofit decisions about their existing non-compliant infrastructure, depending on their seismic hazard level and an accepted level of seismic risk. Determining the code compliance that corresponds to the accepted level of seismic risk is of paramount importance in this process: the additional risk posed by existing structures that do not satisfy the compliance associated with the accepted seismic risk level will have to be mitigated either by seismic retrofitting or demolition and replacement, depending on their remaining service life and a holistic cost-benefit analysis.

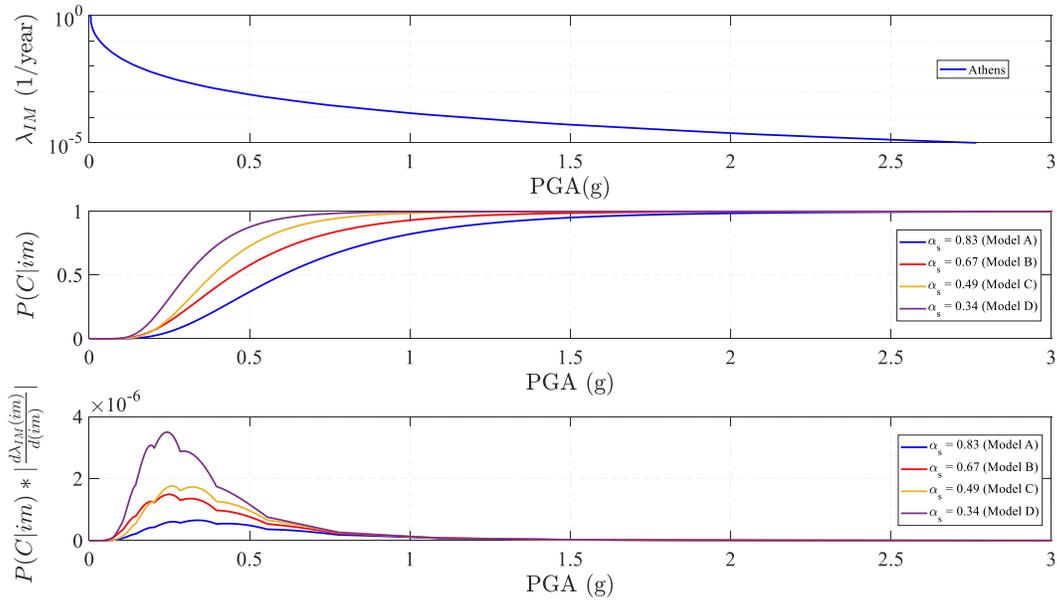


Fig. 16. Deaggregation of mean annual collapse rate λ_c for Athens, Greece.

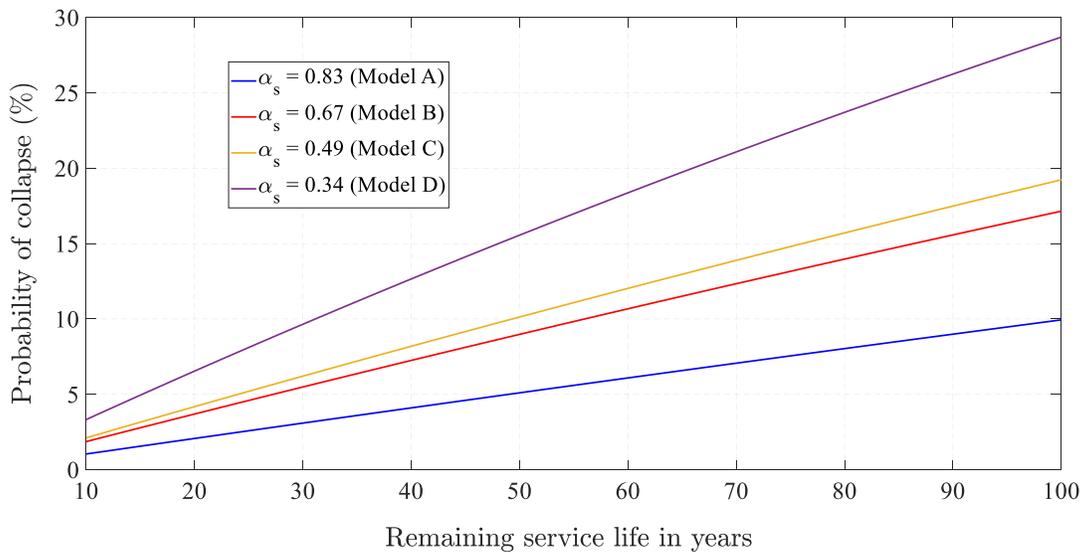


Fig. 17. Probability of collapse of RC frame buildings of varying compliance located in Athens.

4. CONCLUSIONS

This paper presents a methodology for the seismic evaluation of existing structures, based on their seismic code compliance. The normalized metric that is chosen to quantify the code compliance of existing structures is defined as the compliance factor of the structure. This dimensionless metric normalizes the seismic capacity of an existing structure with the seismic demand for a new structure designed at the same location for a predetermined hazard level.

The inelastic seismic behavior of RC frame buildings of varying compliance was analytically investigated in this study to illustrate the application of the proposed methodology for the seismic evaluation of existing structures using the PBEE toolbox (Dolšek 2010). Four RC frame buildings of varying strength were modelled to represent typical examples of RC frame buildings, designed and constructed before the introduction of the modern seismic code provisions. The strength and displacement capacity of these buildings was derived based on static pushover analysis. The strength-based compliance factors of the four buildings were calculated based on bilinear idealizations of the obtained pushover curves and elastic seismic design spectra.

The four RC buildings of varying compliance were subjected to a ground motion excitation ensemble using Incremental Dynamic Analysis (IDA), implemented through the PBEE toolbox. The comparison of the obtained IDA curves with a collapse criterion established for RC frame buildings led to the development of compliance-based fragility curves for the four buildings. The probability of collapse of the four buildings was derived through the integration of the fragility curves over the seismic hazard curves for two locations representing regions of moderate and high seismic hazard: Sion (Switzerland) and Athens (Greece).

The proposed methodology is easy to use and comprises three steps: The estimation of seismic hazard in the location of the structure, the determination of the compliance of the structure to the existing seismic code provisions and the quantification of the seismic risk of the structure, expressed by its probability of collapse.

This study focused on the application of this methodology to an RC frame building of a predetermined geometry and strength for two seismic hazard levels. However, the presented methodology can be applied for the determination of the relation between the code compliance and the seismic risk of a wide range of existing RC, masonry, steel or timber structures of varying geometries and can be performed for more regions, representing different seismic hazard levels. This determination can provide a location-dependent benchmark database that leads to a direct, compliance-based estimation of the seismic risk of existing structures of a known geometry and building typology. The determination of seismic risk targeted-compliance values in this database could provide a valuable tool to local authorities towards a fast, compliance-based seismic assessment of the existing building inventories at a community level.

Along these lines, this methodology can lay the basis for the efficient determination of the seismic risk of existing structures of varying code compliance, expressed by their compliance factors. This seismic risk assessment can yield valuable insight into the decision-making process for the prioritization of the seismic retrofitting of existing structures: The optimal seismic retrofitting strategy for the seismic upgrade of our existing infrastructure can be chosen as the one leading to a seismic risk level accepted by our communities. Within this frame, this seismic risk-based assessment and decision-making process can lead to the development of resilient communities.

Declarations

Funding

The research presented in this study was funded by ETH Zurich.

Conflicts of interest/Competing interests

The authors of this paper certify that they have no affiliations with or involvement in any organization or entity with any financial interest (such as honoraria; educational grants; participation in speakers' bureaus; membership, employment, consultancies, stock ownership, or other equity interest; and expert testimony or patent-licensing arrangements), or non-financial interest (such as personal or professional relationships, affiliations, knowledge or beliefs) in the subject matter or materials discussed in this manuscript.

Availability of data and material

Not applicable

Code availability

Not applicable

5. REFERENCES

Amrein P. Influence of strength compliance on the probability of collapse of an existing RC frame building, Master Thesis at ETH Zurich supervised by Dr. Anastasios Tsiavos and Prof. Bozidar Stojadinovic, Autumn 2020.

Anagnos T, Rojahn C, Kiremidjian AS (1995) NCEER-ATC joint study on fragility of buildings. Techn. Rep. NCEER 95-0003, State Univ. of NY at Buffalo.

Applied Technology Council (1996) Seismic evaluation and retrofit of concrete buildings, Report ATC-40. Redwood City (CA).

ASCE 7-16, Minimum Design Loads for Buildings and Other Structures, American Society of Civil Engineers.

ASCE 41-17, Seismic evaluation and retrofit of existing buildings, American Society of Civil Engineers.

Baker JW (2015) Efficient analytical fragility function fitting using dynamic structural analysis. *Earthquake Spectra* 31(1):579–599.

Bender N, Tsiavos A, Pilotto M, Stojadinovic B (2019) Engineering Collapse-Probability-Based Seismic Retrofit Design for Existing Bridges, 11th National Conference on Earthquake Engineering (11NCEE), Los Angeles, CA, USA.

Bender N (2017) Compliance factors for existing structures: calibration and evaluation, Master Thesis at ETH Zurich supervised by Dr. Anastasios Tsiavos and Prof. Bozidar Stojadinovic.

Beyer K, Tondelli M, Petry S, Peloso S (2015) Dynamic testing of a four-storey building with reinforced concrete and unreinforced masonry walls: prediction, test results and data set. *Bulleting of Earthquake Engineering*;13(10):3015-3064.

Borzi B, Pinho R, Crowley H (2008) Simplified pushover-based vulnerability analysis for large-scale assessment of RC buildings, *Engineering Structures* 30(3), 804-820.

- Chaulagain H, Rodrigues H, Silva V, Spacone E, Varum H (2016) Earthquake loss estimation for the Kathmandu valley. *Bulletin of Earthquake Engineering* 14: 59–88.
- Cornell CA, Jalayer F, Hamburger RO, Foutch DA (2002) Probabilistic basis for 2000 SAC Federal Emergency Management Agency steel moment frame guidelines. *J. Struct. Eng.*, 128(4), 526–533.
- Crowley H, Colombi M, Calvi GM, Pinho R, Meroni F, Cassera A, Application of a prioritization scheme for seismic intervention in schools buildings in Italy. The 14th World Conference on Earthquake Engineering, Beijing, China, 2008.
- D’Ayala D, Mesleim A, Vamvatsikos D, Porter K, Rossetto T, Silva V (2015) Guidelines for analytical vulnerability assessment of low/mid-rise buildings, gem vulnerability global component project. doi: <https://doi.org/10.13117/GEM.VULN-MOD.TR2014.12>
- Dolšek M, Lazar Sinković N, Žižmond J. IM-based and EDP-based decision models for the verification of the seismic collapse safety of buildings. *Earthq Eng Struct Dyn.* 2017; 46(15):1-18.
- Dolšek M (2010) Development of computing environment for the seismic performance assessment of reinforced concrete frames by using simplified nonlinear models. *Bulletin of Earthquake Engineering* 8(6):1309–29.
- Dolšek M (2008) PBEE toolbox—examples of application, Version 1. University of Ljubljana. <http://ice4risk.slo-projekt.info/applications.htm>
- Eads L, Miranda E, Krawinkler H, Lignos DG (2013) An efficient method for estimating the collapse risk of structures in seismic regions. *Earthquake Engineering and Structural Dynamics* 42(1):25–41.
- EN 1998-1 (2004) (English): Eurocode 8: Design of structures for earthquake resistance – Part 1: General rules, seismic actions and rules for buildings [Authority: The European Union Per Regulation 305/2011, Directive 98/34/EC, Directive 2004/18/EC.
- Elwood K, Holmes W, Comartin C, Heinz J, Rojahn C, Dragovic J, McCabe S, Mahoney M (2012) Collapse assessment and mitigation of nonductile concrete buildings: ATC-76-5/ATC-78/ATC-95, in 15th World Conference on Earthquake Engineering, Lisbon, Portugal.
- European Facilities for Earthquake Hazard and Risk (2017) Seismic Hazard Platform, Accessed 15.10.2020: <http://www.efehr.org/en/hazard-data-access/hazard-curves/>.
- Fajfar P (1999) Capacity spectrum method based on inelastic demand spectra. *Earthquake Engineering and Structural Dynamics* 28: 979–993.
- Fardis MN, Papailia A, Tsionis G (2012) Seismic fragility of RC framed and wall-frame buildings designed to the EN-Eurocodes. *Bulletin of Earthquake Engineering* 10:1767–1793.
- Fardis MN (1996) Experimental and numerical investigations on the seismic response of RC infilled frames and recommendations for code provisions. ECOEST/PREC 8, Rep. No. 6, LNEC, Lisbon.
- Freeman SA (1998) Development and use of capacity spectrum method, Proceedings of the 6th National Conference of Earthquake Engineering, Seattle, Oakland.
- Freeman SA, Nicoletti JP, Tyrell JV (1975) Evaluations of existing buildings for seismic risk- A case study of Puget Sound Naval Shipyard, Bremerton, Washington, Proceedings of the 1st National Conference of Earthquake Engineering, Berkeley, California.
- Federal Emergency Management Agency (2003). HAZUS-MH Technical Manual. Washington DC.

- Galanis P, Sycheva A, Mimra W, Stojadinovic B (2018) A framework to evaluate the benefit of seismic upgrading, *Earthquake Spectra* 34: 527–548.
- Grant DN, Bommer JJ, Pinho R, Calvi GM, Goretti A, Meroni F (2007) A Prioritization Scheme for Seismic Intervention in School Buildings in Italy. *Earthquake Spectra*, 23, Issue 2, 291-314, 2007.
- Iervolino I, Manfredi G, Polese M, Verderame GM, Fabbrocino G (2007) Seismic risk of R.C. building classes, *Engineering Structures* 29 (5): 813-820.
- Jalayer F, Franchin P, Pinto PE (2007) A scalar damage measure for seismic reliability analysis of RC frames. *Earthquake Engineering and Structural Dynamics*; 36(13):2059–2079.
- Jalayer F, Cornell A (2002) A technical framework for probability-based demand and capacity factor (DCFD) seismic formats. RMS Technical Rep. No. 43 to the PEER Center, Dept. of Civil and Environmental Engineering, Stanford Univ., Stanford, Calif. Kennedy, R. P., and Short, S. A.
- Kappos A, Panagopoulos G, Panagiotopoulos C, Penelis G (2006) A hybrid method for the vulnerability assessment of R/C and URM buildings. *Bulletin of Earthquake Engineering* 4:391–413.
- Kappos AJ, Lekidis V, Panagopoulos G, Sous I, Theodulidis N, Karakostas Ch, Anastasiadis T, Salonikios T, Margaritis B (2007) Analytical estimation of economic loss for buildings in the area struck by the 1999 Athens earthquake and comparison with statistical repair costs. *Earthquake Spectra* 23 (2): 333–355.
- Kappos A, Panagopoulos G (2010) Fragility curves for reinforced concrete buildings in Greece, *Structure and Infrastructure Engineering* 6(1-2): 39-53, DOI: 10.1080/15732470802663771.
- Liel A, Haselton C, Deierlein G, Baker J. Assessing the seismic collapse risk of reinforced concrete frame structures, including the effects of modeling uncertainties. *Special Workshop on Risk Acceptance and Risk Communication*, Stanford University, 26–27 March 2007.
- Luco N, Ellingwood BR, Hamburger RO, Hooper J D, Kimball JK, Kircher CA (2007). Risk-targeted versus current seismic design maps for the conterminous United States. *SEAOC 2007 Convention Proceedings*, Structural Engineers Association of California, Sacramento, California.
- Masi A (2003) Seismic Vulnerability Assessment of Gravity Load Designed R/C Frames, *Bulletin of Earthquake Engineering* 1(3):371-395.
- Mazzoni S, McKenna F, Scott MH, Fenves GL (2006) Open system for earthquake engineering simulation. University of California, Berkeley.
- McKenna F, Fenves GL, Scott MH (2000) Open system for earthquake engineering simulation. Univ. of California, Berkeley.
- MathWorks (2007) *MATLAB the Language of Technical Computing*.
- Park Y-J, Ang A-H-S (1985) Seismic damage analysis of reinforced concrete buildings. *Journal of Structural Engineering ASCE* 111(4): 740-757.
- PEER NGA Strong Motion Database (2018) Pacific Earthquake Engineering Research Center, University of California, Berkeley, available at. <https://ngawest2.berkeley.edu/>.

- Pinho R, Marques M, Monteiro R, Casarotti C, Delgado R (2013) Evaluation of nonlinear static procedures in the assessment of building frames. *Earthquake Spectra* 2013; 29(4):1459–76.
- Pinho R, Antoniou S, Pietra D. A displacement-based adaptive pushover for seismic assessment of steel and reinforced concrete buildings. *Proceedings of the Eighth US National Conference on Earthquake Engineering, San Francisco, U.S.A.; Paper No. 1701, 2006.*
- Shahnazaryan D, O'Reilly GJ (2021) Integrating expected loss and collapse risk in performance-based seismic design of structures. *Bulletin of Earthquake Engineering*. <https://doi.org/10.1007/s10518-020-01003-x>.
- SIA 269/8 (2017) Maintenance of structures–Earthquake (Erhaltung von Tragwerken–Erdbeben).
- Silva V, Akkar S, Baker J, Bazzurro P, Castro JM, Crowley H, Dolšek M, Galasso C, Lagomarsino S, Monteiro R, Perrone D, Pitilakis K, Vamvatsikos D (2019) Current Challenges and Future Trends in Analytical Fragility and Vulnerability Modeling. *Earthquake Spectra* 35 (4): 1927–1952.
- Singhal A, Kiremidjian AS (1996) A method for probabilistic evaluation of seismic structural damage. *Journal of Structural Engineering ASCE* 122(12):1459–1467.
- Tsiavos A, Stojadinovic B (2019) Constant yield displacement procedure for seismic evaluation of existing structures. *Bulletin of Earthquake Engineering* 17:2137–64. <https://doi.org/10.1007/s10518-018-00532-w>.
- Tsiavos A, Bender N, Stojadinovic B (2018) Collapse-probability-based compliance factors for seismic evaluation of existing structures. *Proceedings of the 16th European Conference on Earthquake Engineering, 10405, Thessaloniki, Greece.*
- Tsiavos A, Stojadinovic B (2016) A probabilistic approach towards and evaluation of existing code provisions for seismically isolated structures, *European Congress on Computational Methods in Applied Sciences and Engineering (ECCOMAS), Crete Island, Greece.*
- Vamvatsikos D, Cornell CA (2006) Direct estimation of the seismic demand and capacity of oscillators with multilinear static pushovers through Incremental dynamic analysis. *Earthquake Engineering and Structural Dynamics* 35(9):1097–1117.
- Vamvatsikos D, Cornell CA (2004) Applied incremental dynamic analysis. *Earthquake Spectra* 20(2):523–553.
- Vamvatsikos D, Cornell CA (2002) Incremental dynamic analysis, *Earthquake Engineering and Structural Dynamics* 2002; 31(3): 491–514.
- Zeris C, Repapis C (2018) Comparison of the seismic performance of existing RC buildings designed to different codes. *Earthquakes Structures* 14: 505–523. doi: 10.12989/eas.2018.14.6.505.
- Zeris C, Vintzileou E, Repapis C (2002) Structural Overstrength Evaluation of Existing Buildings. *Proceedings of the 12th European Conference on Earthquake Engineering, London, U.K, CD-ROM, Paper 115, Elsevier Science.*
- Zeris C, Giannitsas P, Alexandropoulos K, Vamvatsikos D (2006) Inelastic Modeling Sensitivity of the Predicted Seismic Performance of an Existing RC Building, Paper No: 980, Proc. Thirteenth European Conference on Earthquake Engineering, Geneva, 2006.
- Žižmond J, Dolšek M (2019) Formulation of risk-targeted seismic action for the force-based seismic design of structures. *Earthquake Engineering and Structural Dynamics* 48 (12):1406-1428.

Figures

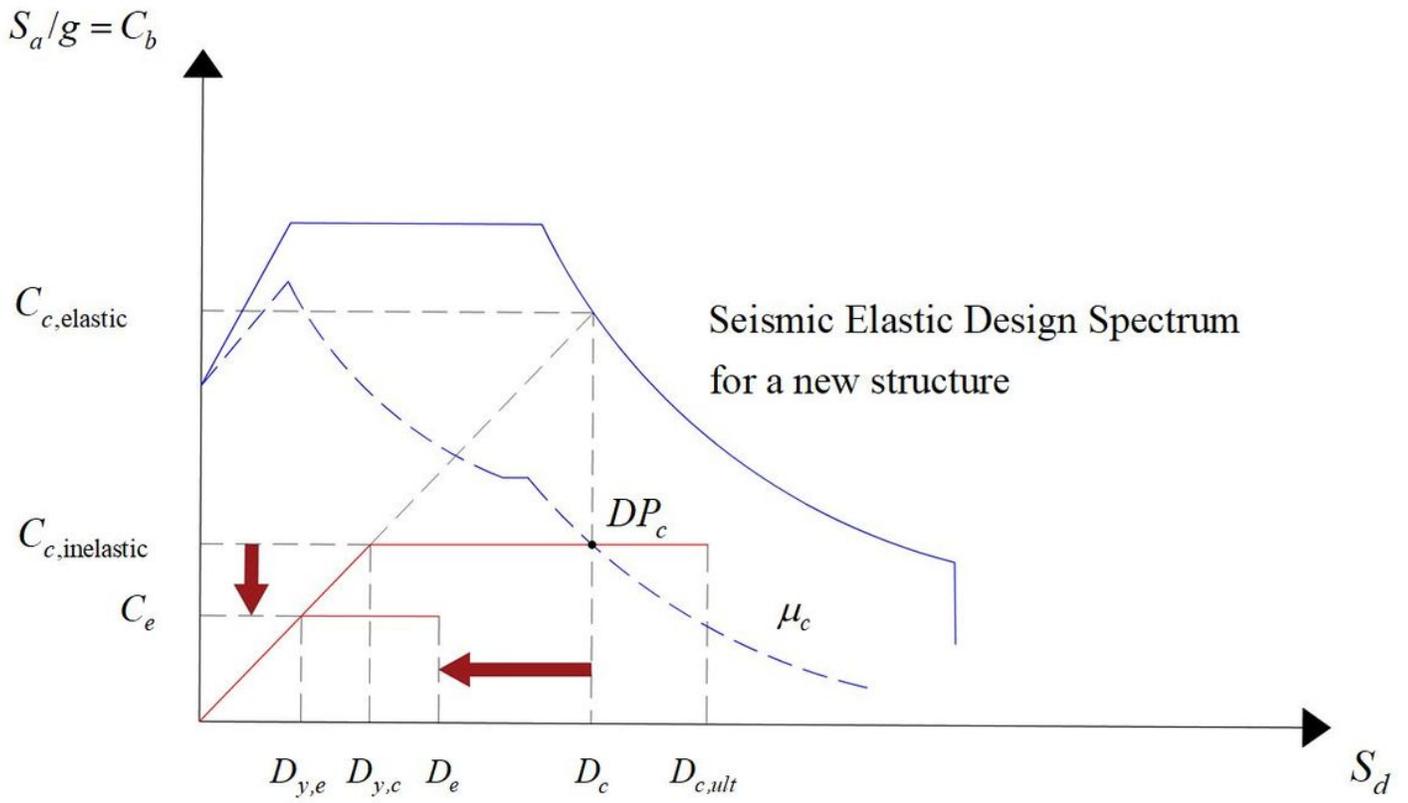


Figure 1

Strength-based compliance factor α_s and displacement-based compliance factor α_D for a strength- and displacement-deficient existing structure ($\alpha_s < 1$, $\alpha_D < 1$).

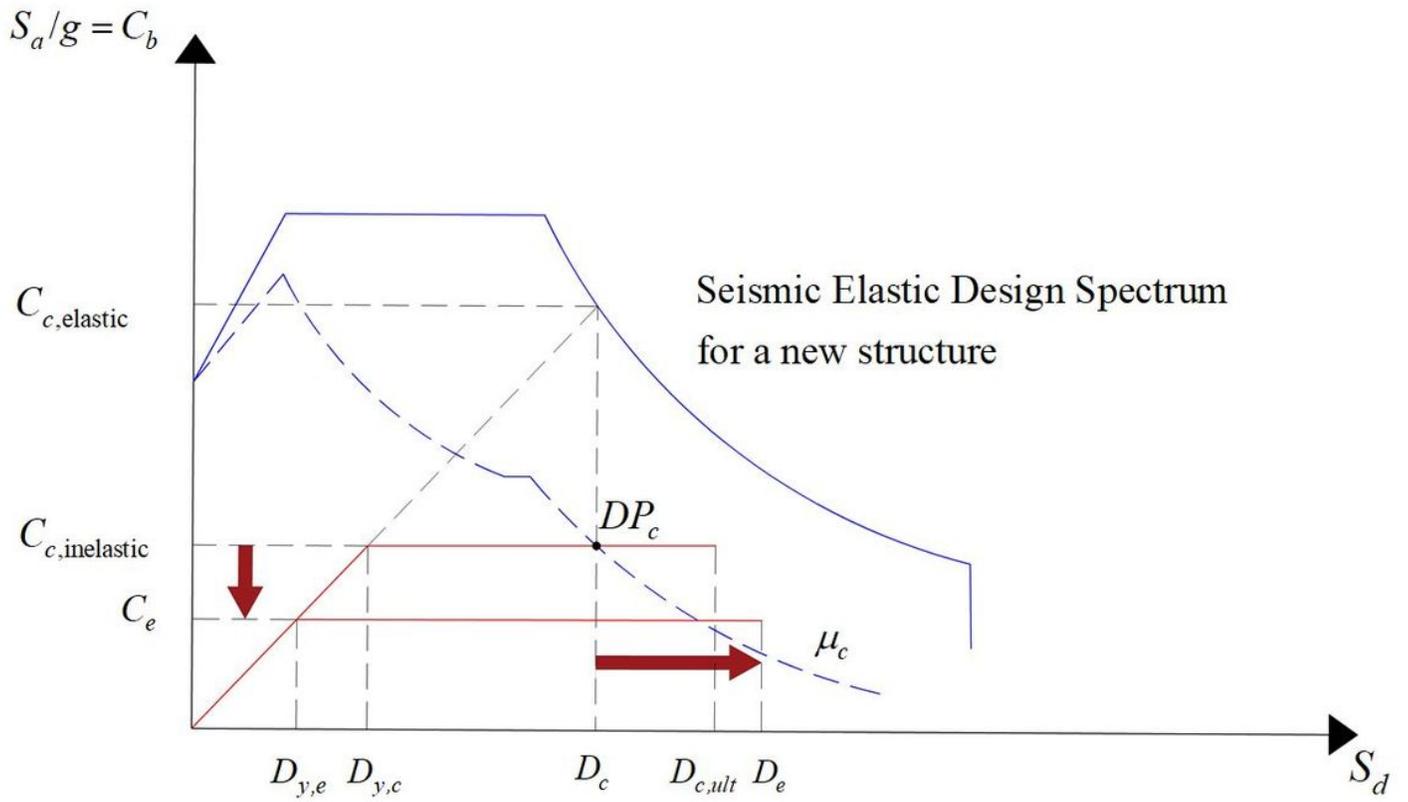


Figure 2

Strength-based compliance factor a_s and displacement-based compliance factor a_D for a strength-deficient existing structure ($a_s < 1$, $a_D > 1$).

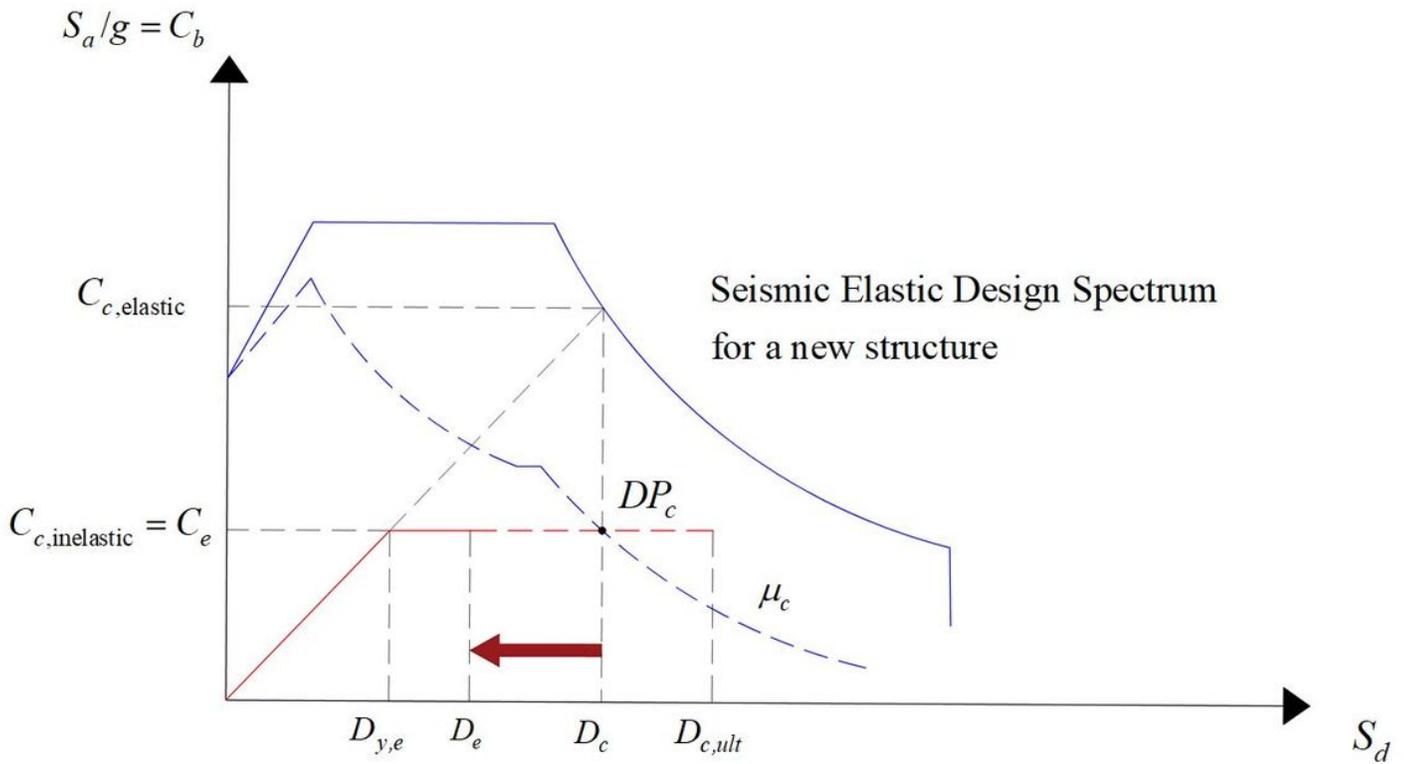


Figure 3

Strength-based compliance factor α_s and displacement-based compliance factor α_D for a displacement-deficient existing structure ($\alpha_s=1, \alpha_D<1$).




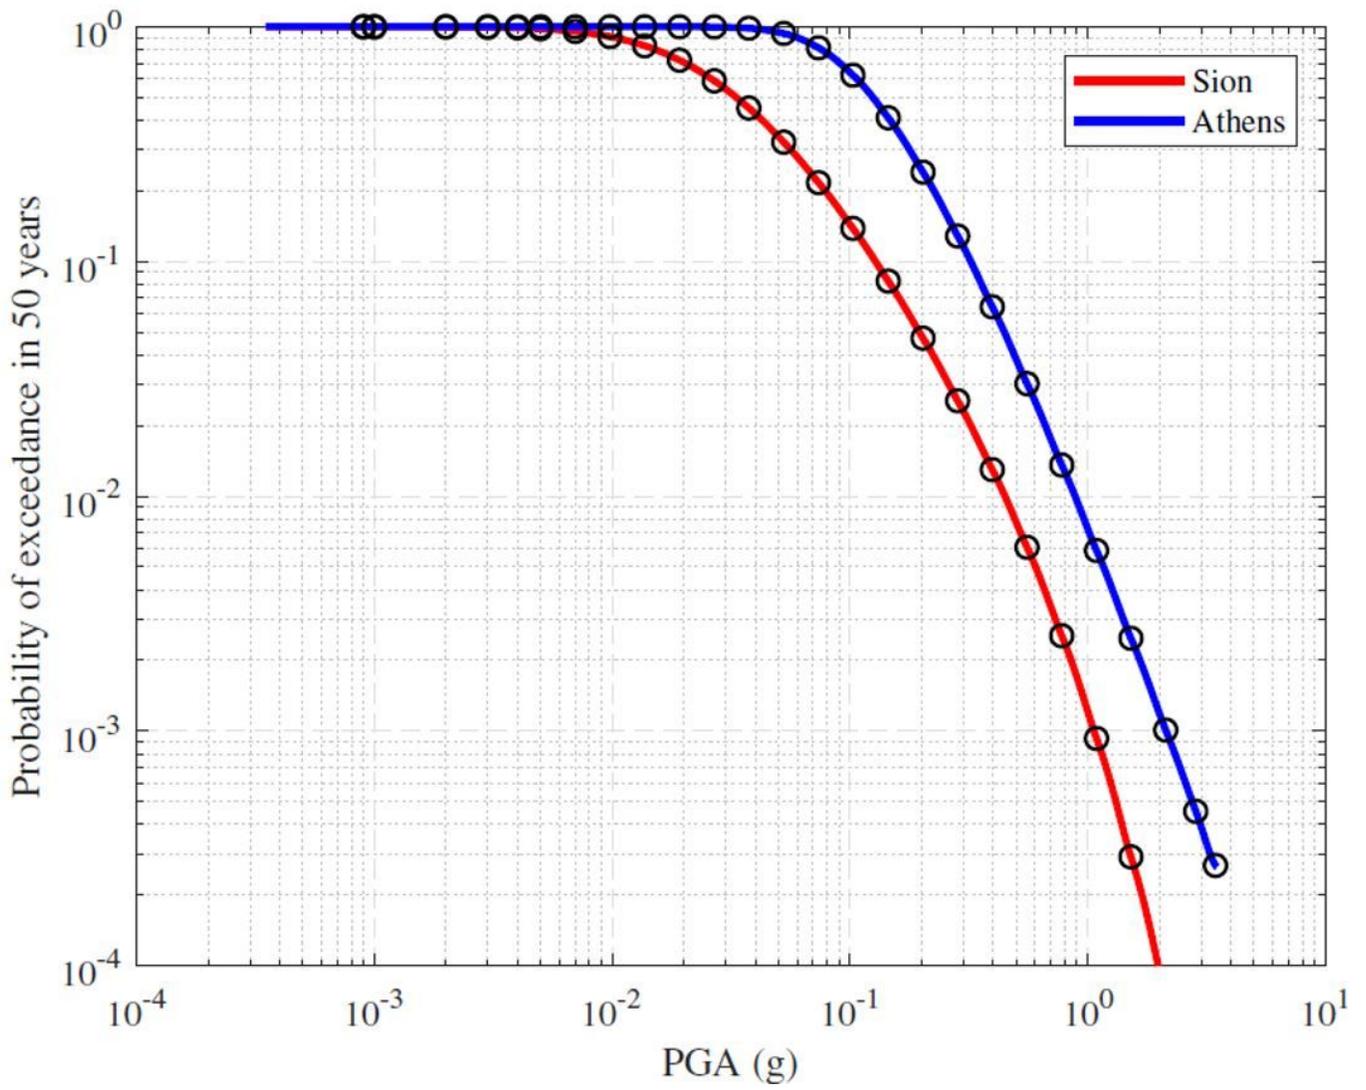


Figure 4

Seismic hazard curves for Sion (Switzerland) and Athens (Greece).

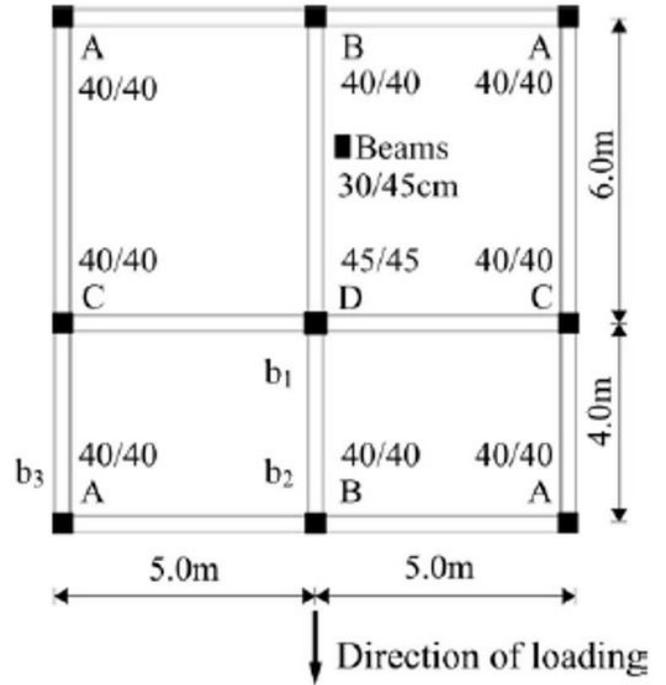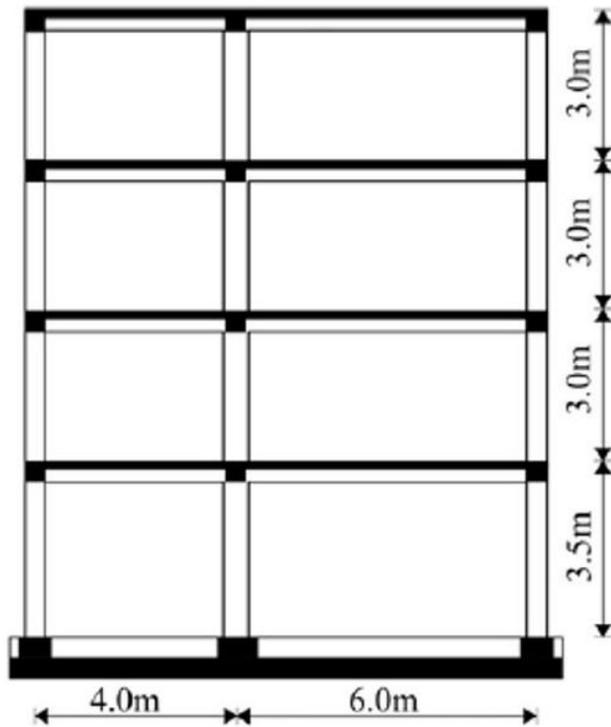

Reinforcement of columns at the base:

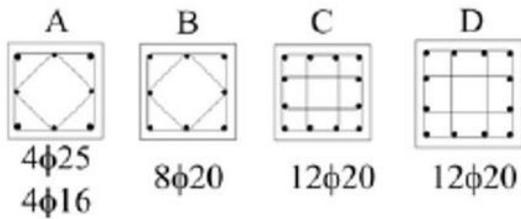

Typical reinforcement in beams in first storey:

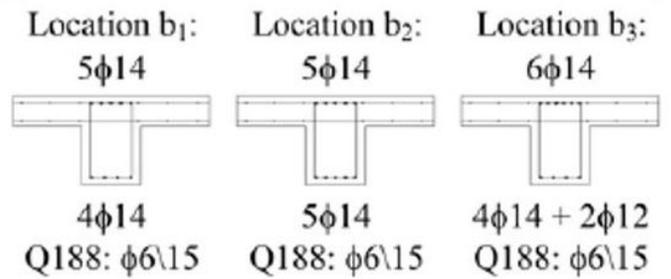


Figure 5

Four-storey RC building designed by Fardis (1996) according to EC8 and investigated by Dolšek (2008, 2010).

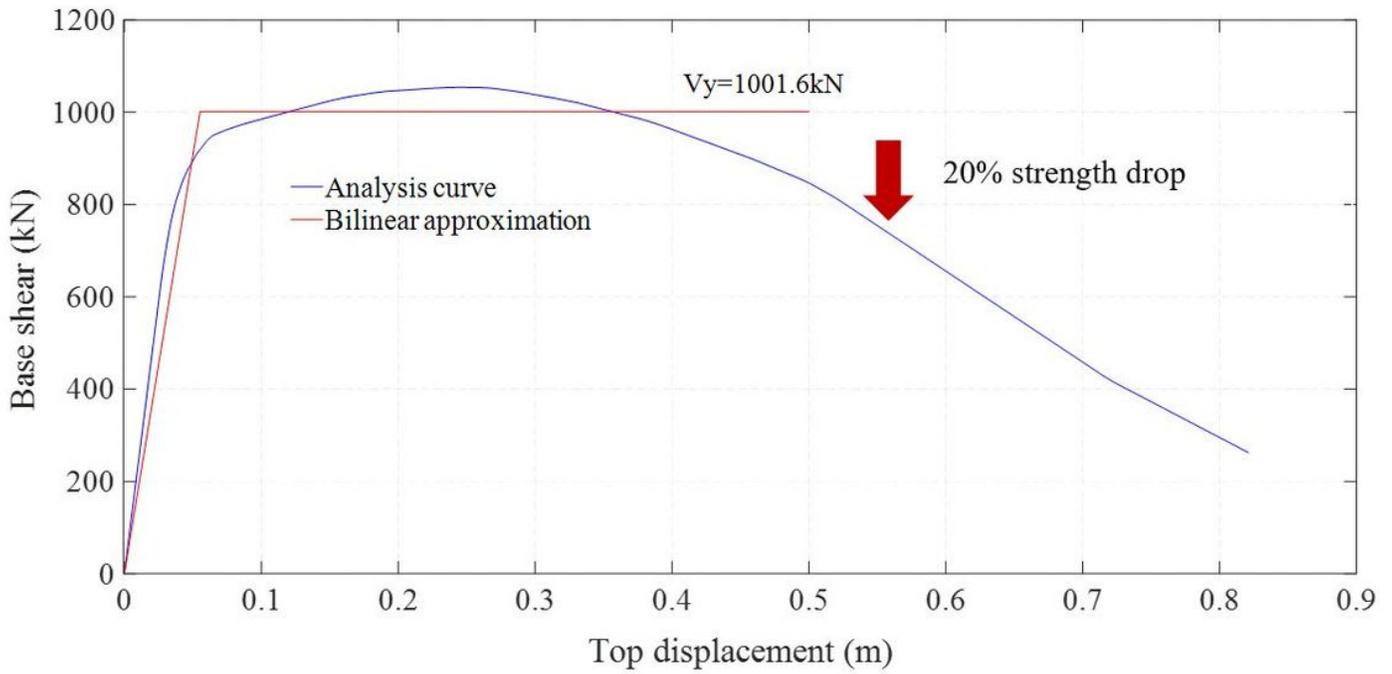


Figure 6

Analytical and bilinearized pushover curve of the RC frame building.

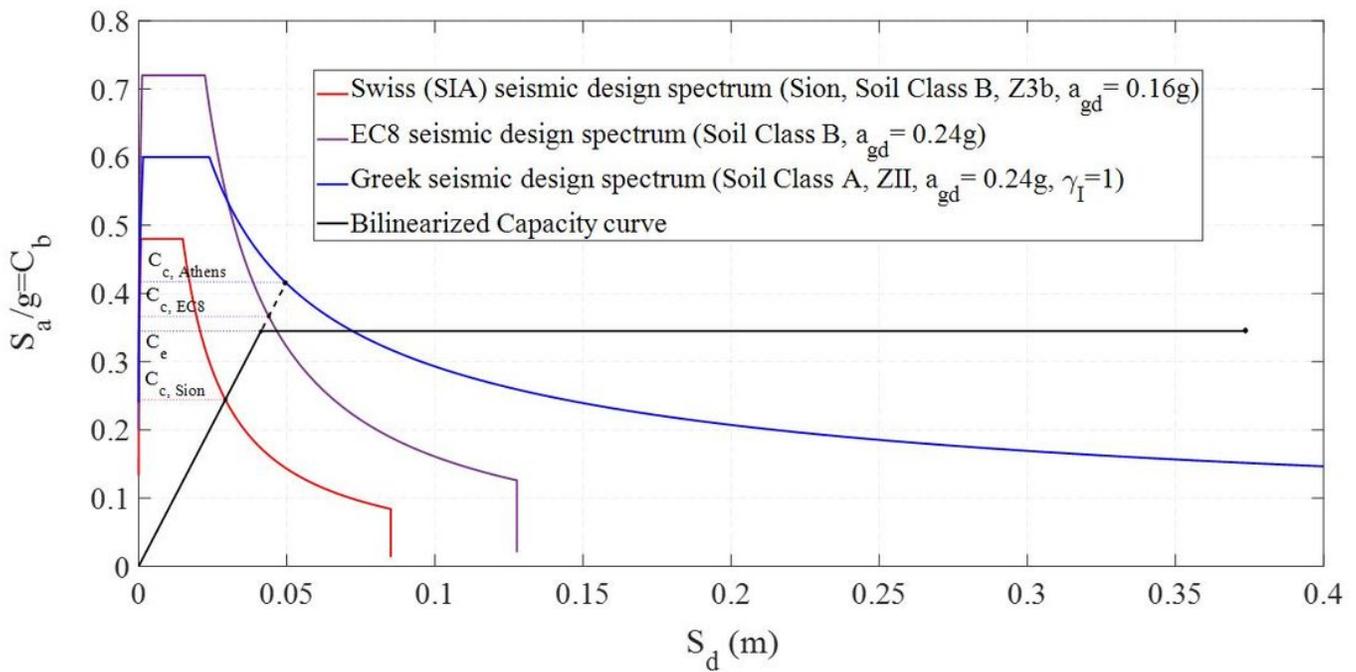


Figure 7

Determination of the compliance of the RC frame building to seismic code provisions.

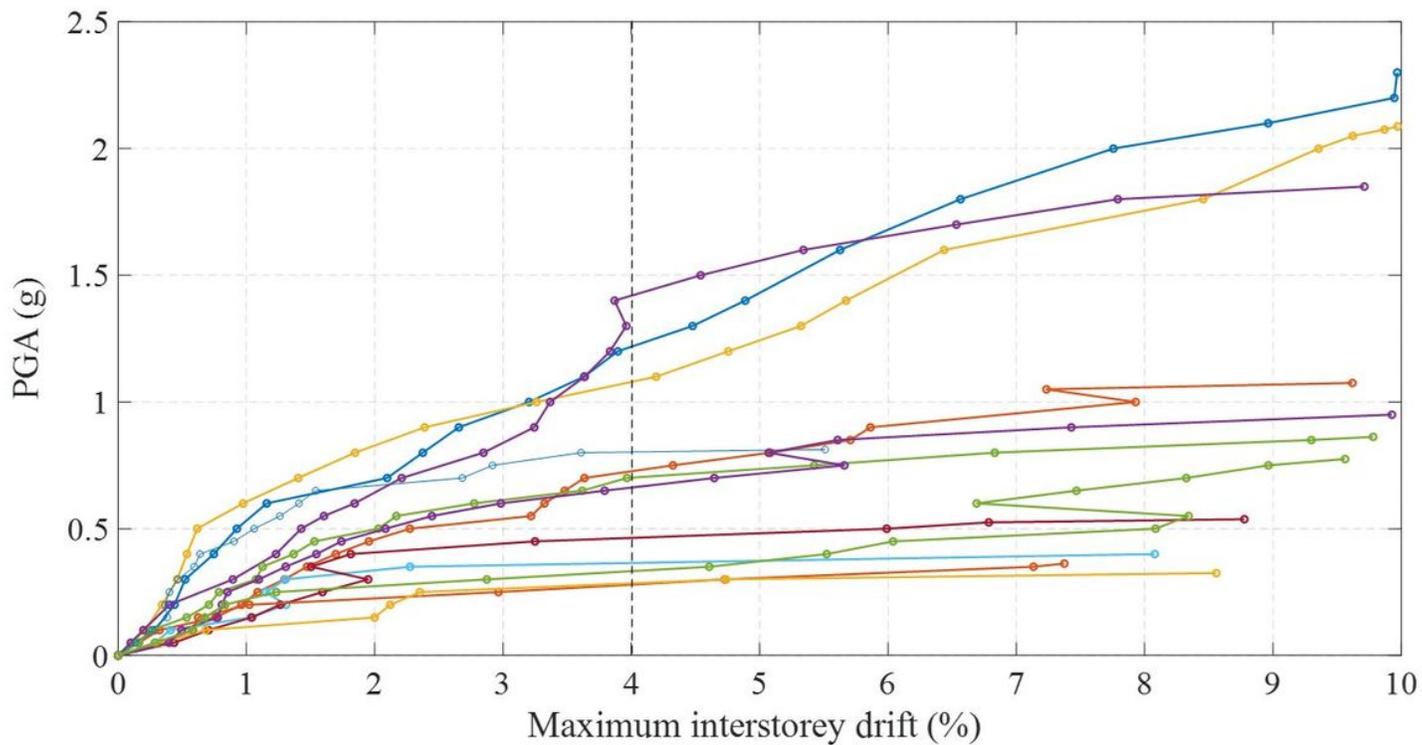


Figure 8

IDA curves of the RC frame building.

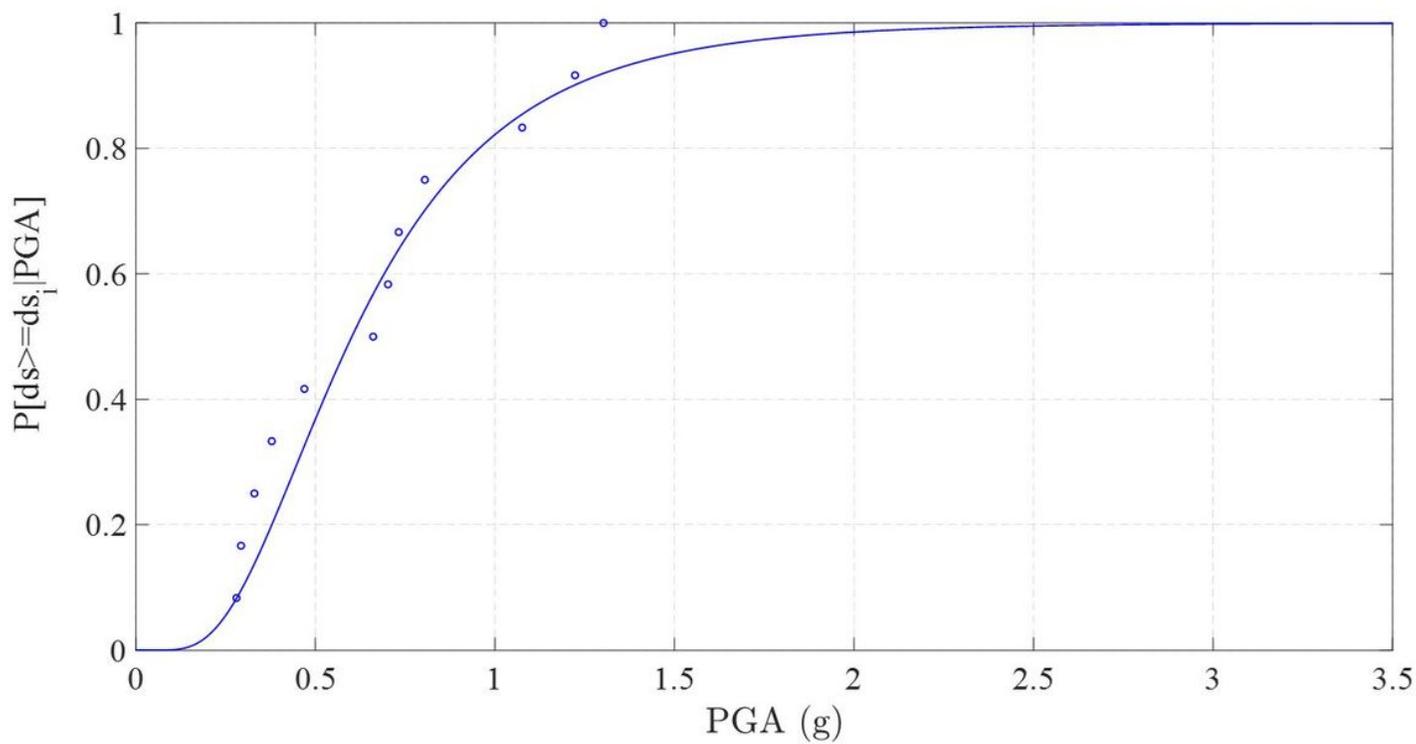


Figure 9

Fragility curve of the RC frame building.

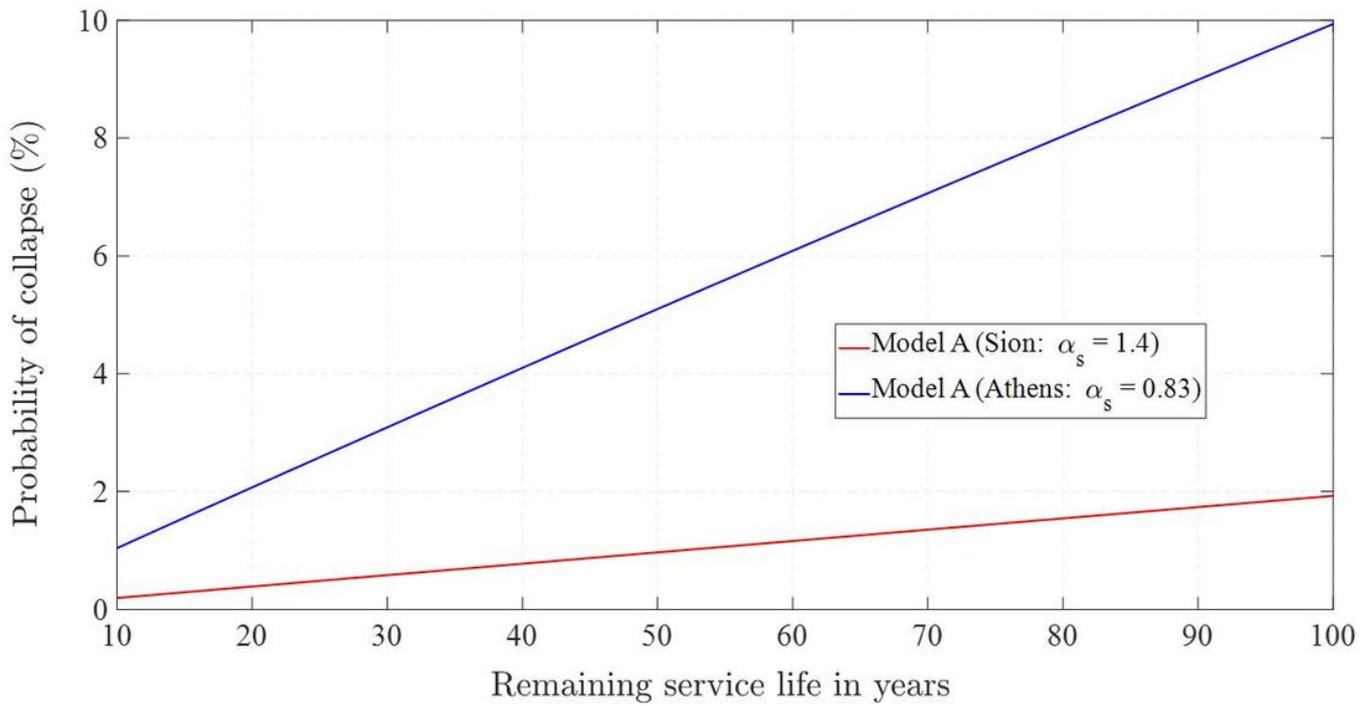


Figure 10

Probability of collapse of the RC frame building for varying values of the service life TL and two different locations: Sion (Switzerland) and Athens (Greece).

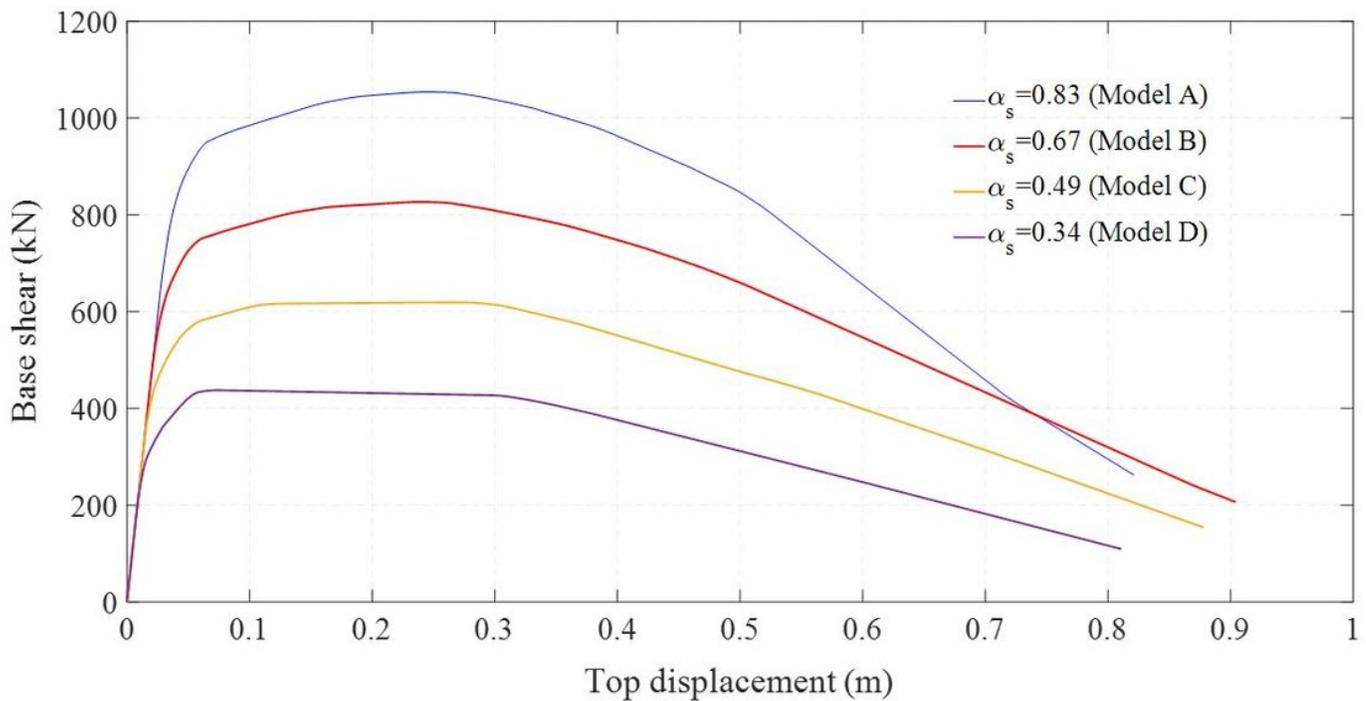


Figure 11

Pushover curves for building models A, B, C and D (compliance factors per Greek seismic code provisions).

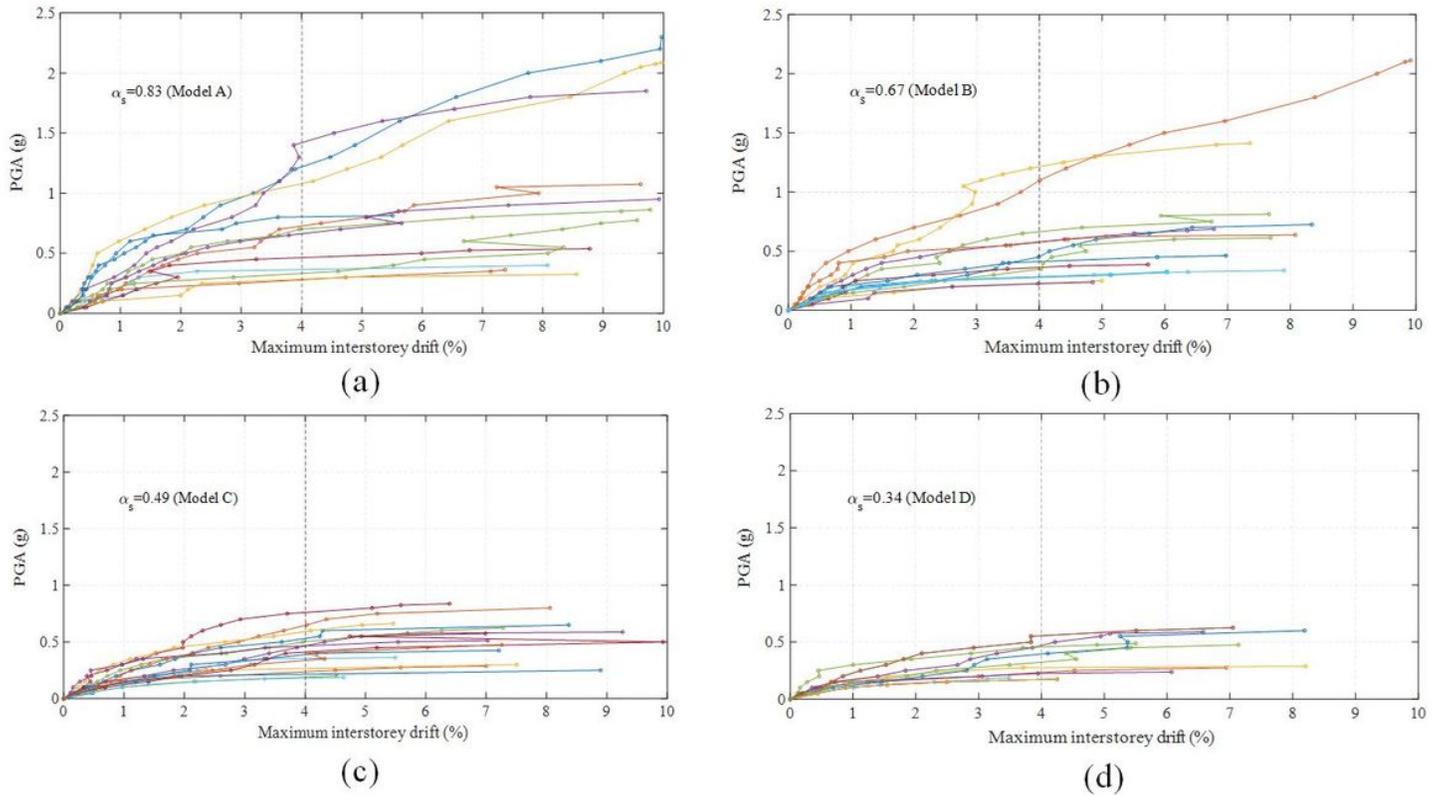


Figure 12

IDA curves for (a) Model A, (b) Model B, (c) Model C and (d) Model D.

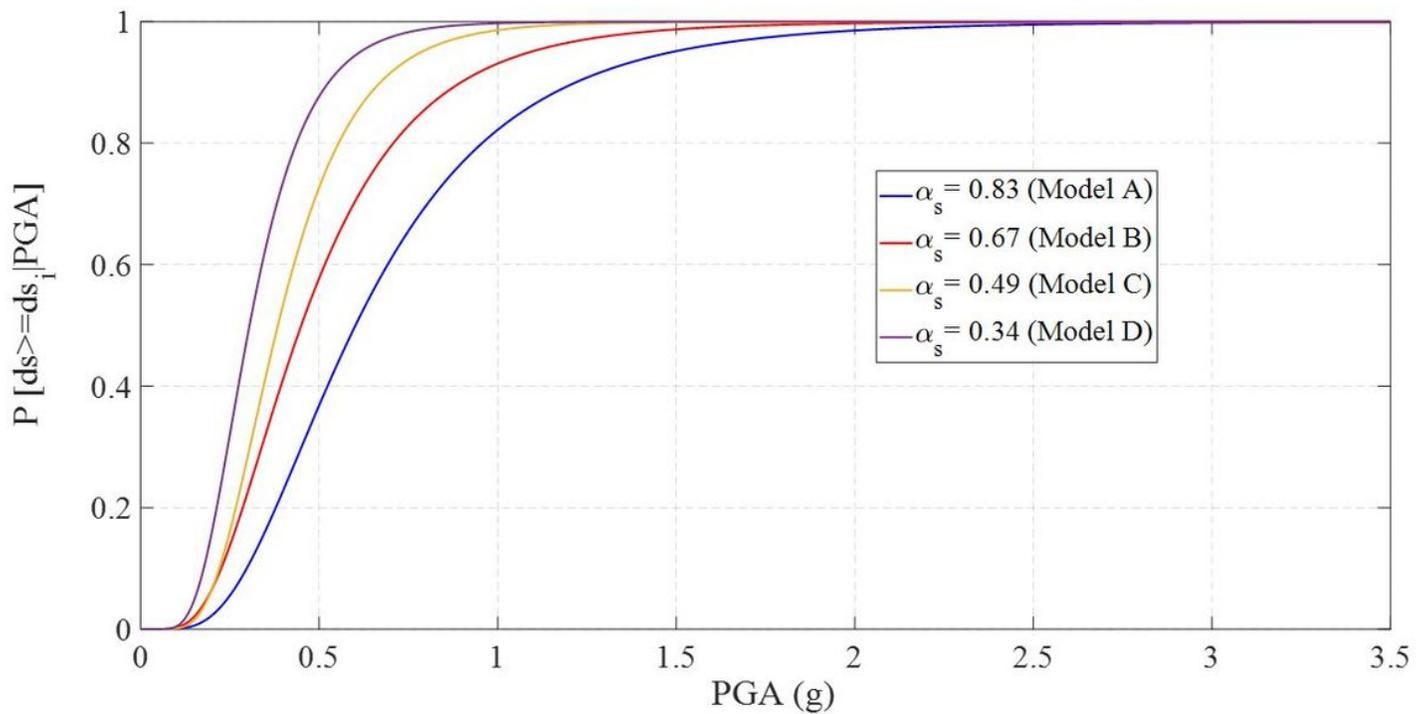


Figure 13

Fragility curves for building models A, B C and D (compliance factors per Greek seismic code provisions).

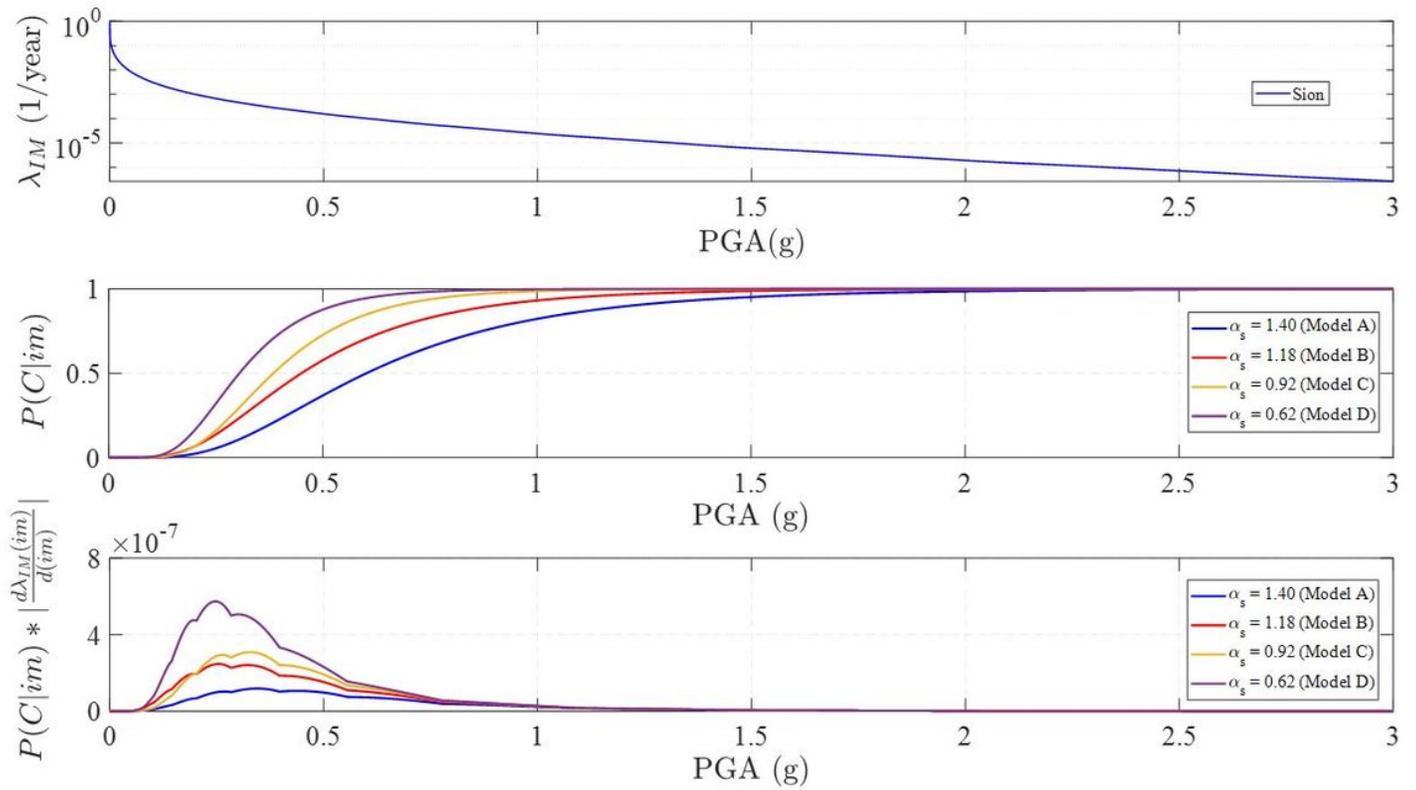


Figure 14

Deaggregation of mean annual collapse rate λ_c for Sion, Switzerland.

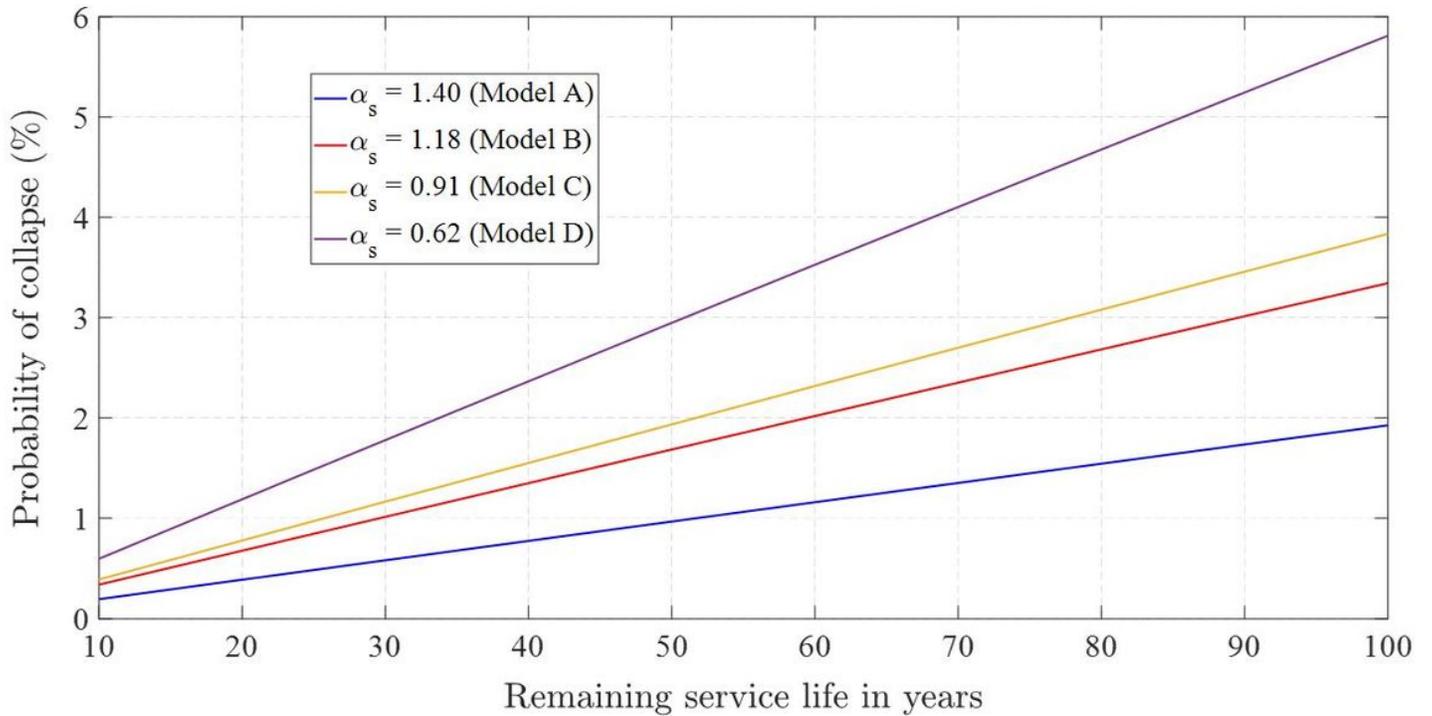


Figure 15

Probability of collapse of RC frame buildings of varying compliance located in Sion.

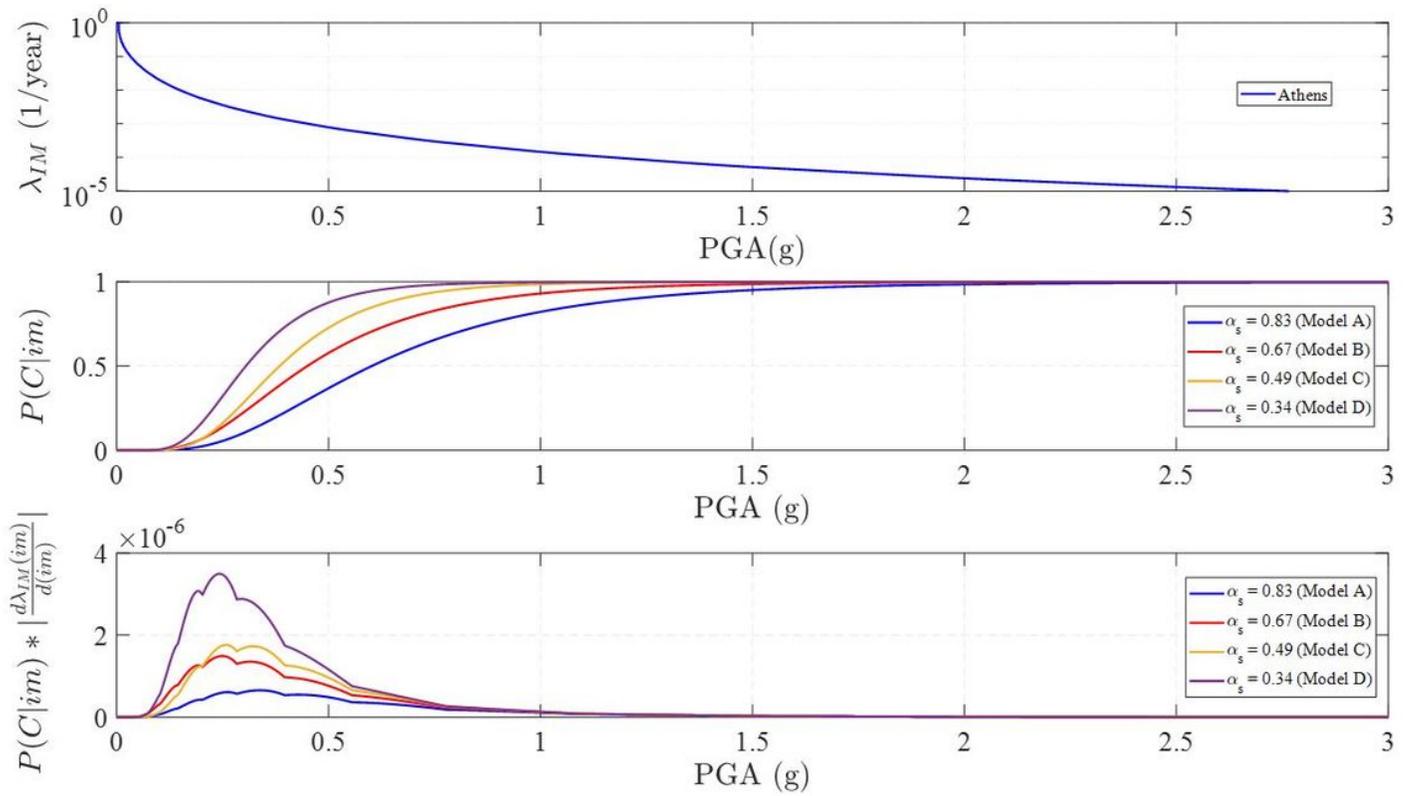


Figure 16

Deaggregation of mean annual collapse rate λ_c for Athens, Greece.

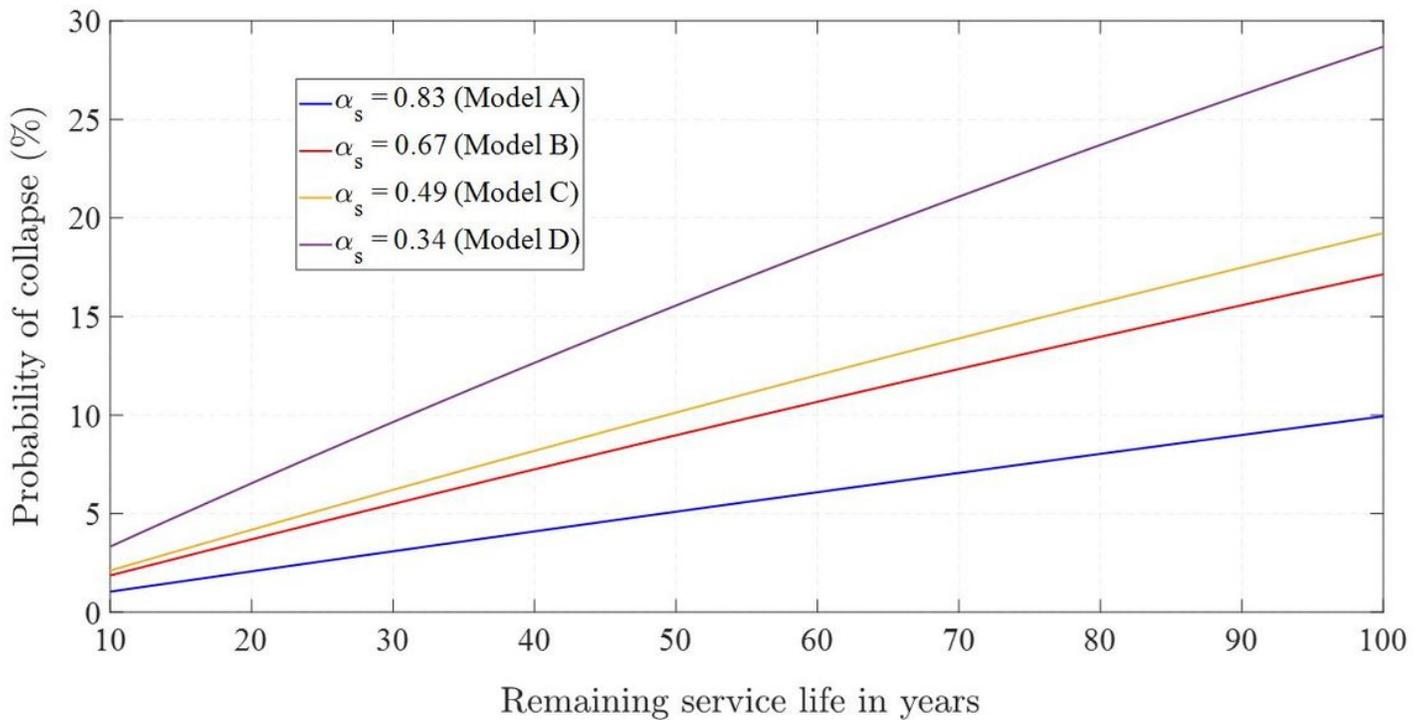


Figure 17

Probability of collapse of RC frame buildings of varying compliance located in Athens.