

Low Complexity Single Carrier Frequency Domain Detectors for Internet of Underwater Things (IoUT)s

Amer Aljanabi

University of Huddersfield

Osama Alluhaibi

University of Kirkuk

Qasim Zeeshan Zeeshan Ahmed (✉ q.ahmed@hud.ac.uk)

University of Huddersfield <https://orcid.org/0000-0002-3957-5341>

Fahd Ahmed Khan

National University of Science and Technology

Waqas Bin Abbas

National University of Computer and Emerging Sciences

Pavlos Lazaridis

University of Huddersfield

Research Article

Keywords: Internet of underwater things (IoUT)s, underwater communication systems, Single carrier frequency domain equalizer, Minimum mean square error, Least mean square, and Recursive least squares

Posted Date: June 7th, 2021

DOI: <https://doi.org/10.21203/rs.3.rs-522619/v1>

License: © ⓘ This work is licensed under a Creative Commons Attribution 4.0 International License.

[Read Full License](#)

Version of Record: A version of this preprint was published at Wireless Personal Communications on April 5th, 2022. See the published version at <https://doi.org/10.1007/s11277-022-09667-1>.

Low Complexity Single Carrier Frequency Domain Detectors for Internet of Underwater Things (IoUT)s

**Amer Aljanabi, Osama Alluhaibi,
Qasim Z. Ahmed, Fahd A. Khan,
Waqas-Bin-Abbas, and Pavlos Lazaridis.**

Received: date / Accepted: date

Abstract This paper proposes low complexity detection for internet of underwater things (IoUT)s communication. The signal is transmitted from the source to the destination using several sensors. To simplify the computational operations at the transmitter and the sensory nodes, a single carrier frequency domain equalizer (SC-FDE) is proposed and amplify-and-forward (AF) protocols are employed. Fast Fourier transform (FFT) and use of cyclic prefix (CP) are also proposed to simplify these algorithms when compared to time-domain equalization. As precise channel data is difficult to capture in underwater communications, the adaptive implementation of FDE is proposed as a solution that can be employed when the channel experiences a fast doppler shift. The two adaptive detectors are based on the least mean-square (LMS) and recursive least square (RLS) principles. Numerical simulations show that the performance of the bit error rate (BER) performance of the proposed detectors is close to that of the ideal minimum mean square error (MMSE).

Keywords Internet of underwater things (IoUT)s, underwater communication systems, Single carrier frequency domain equalizer, Minimum mean square error, Least mean square, and Recursive least squares.

A. Aljanabi, Q. Z. Ahmed and P. Lazaridis are with School of Computing and Engineering, University of Huddersfield, United Kingdom. (Email: {a.aljanabi,q.ahmed,p.lazaridis}@hud.ac.uk).

O. Alluhaibi is with School of Engineering, Electrical Engineering, University of Kirkuk, Kirkuk, IRAQ. (Email: osake@uokirkuk.edu.iq).

F. A. Khan is with School of Electrical Engineering and Computer Science, National University of Sciences and Technology, Pakistan. (Email: fahd.ahmed@seecs.edu.pk).

W-B-Abbas is with Department of Electrical Engineering, FAST National University of Computer and Emerging Sciences, Pakistan. (Email: waqas.abbas@nu.edu.pk).

Address(es) of author(s) should be given

1 Introduction

Underwater communications have attracted great research interest and are expected to enable a wide range of internet of underwater things (IoUT)s based applications such as pollution monitoring, oceanographic data collection, disaster prevention, tactical surveillance, underwater exploration, and port security [1–5]. The practical realization of these cooperative IoUT applications depends on several factors such as reliability, real-time long-range communication, throughput, security, etc. [1–11], and references therein. The peculiar nature of the underwater channel makes it very difficult to satisfy the above-mentioned IoUT application requirements [12, 13].

The underwater communication poses adverse channel conditions due to high attenuation, a large number of multipath, variable propagation delay spread, and susceptibility to Doppler shift between the source and the destination [5]. It is also very difficult to maintain line of sight (LOS) communication which results in significant signal attenuation [12, 13]. Furthermore, the intersymbol interference (ISI) span is very different in shallow and deep water [14]. A possible solution to address underwater propagation channel challenges is to increase the transmit power and/or a high complexity transceiver design [15, 16]. However, this is not a feasible option due to limited available power at underwater communicating nodes [17]. To address above mentioned issues, a multi-hop network with the advantages of cooperative communication is an essential requirement for reliable communication over long distances [7]. Cooperative communication allows multiple sensors to form a distributed cooperative sensor network, enabling them to achieve spatial diversity which helps to save transmission power by combating the severe signal attenuation encountered over long distances [18].

Several works have highlighted the advantages of cooperative communication in IoUTs. In [19], to alter the multi-path effect at the receiver, an amplify-and-forward (AF) based cooperative transmission scheme has been proposed. Particularly, a relay node amplifies the incoming acoustic signal to provide additional multi-paths to the receiver. However, in this work, only a single relay node is considered. In [20], an energy-efficient cooperative acoustic communication protocol to improve network lifetime, end-to-end delay, and reduce energy consumption has been proposed. The algorithm selects the relay and the destination nodes based on the signal-to-noise ratio (SNR) and distance among the communicating nodes. However, the proposed scheme requires SNR calculation at each link which results in high computational complexity. In [7], proposed a dynamic cooperative communication scheme for underwater acoustic networks where the cooperative node transmits blocks with limited redundancy to improve transmission efficiency and to reduce end-to-end delay. In [21], the authors proposed a cooperative communication-based solution where the cluster nodes are selected using a K -mean algorithm and cluster heads are selected using conditional probability to combat the packet loss problem and to improve the lifetime of IoUTs.

Despite the advantages of employing cooperative communication in IoUTs, the main challenge is to resolve the number of multipath [22,23]. This problem is further exacerbated by a large number of relays that act as sensors in IoUTs. At the receiver, this increases the complexity of the time-domain equalization (TDE) as additional RAKE fingers are required to resolve these multipath components [22,24,25]. As a result, the TDE for IoUTs becomes unattractive as compared to the frequency-domain methods[26–30]. Frequency-domain methods employ the advantages of the Fast Fourier Transform (FFT) algorithm such as orthogonal frequency division multiplexing (OFDM) or frequency domain equalization (FDE) [26–30]. In [28], authors presented the advantages of FDE with a single carrier (SC) for a multiple-input multiple-output (MIMO) underwater communication system. In [29], authors investigated the performance of FDE and the hybrid time-frequency-domain equalizer (HTFDE) with SC for synthetic aperture underwater acoustic communications. In [10], authors investigated the optimal relay selection and power control in an OFDM-based cooperative communication. When compared to OFDM, the SC-FDE can achieve a similar bit error rate (BER) performance, but with a lower peak-to-average power ratio (PAPR). Furthermore, FFT is carried out at the receiver side in SC-FDE, therefore, the transmitter used in IoUTs will have a very basic structure [26].

It is highlighted that in existing literature FDE and AF relaying have only been discussed separately. Therefore, the key novelty of this work is to analyze and evaluate the performance of combined SC-FDE and cooperative communication with AF protocol. This paper addresses the problem of reliable communication between the source and the destination in an IoUTs scenario. Particularly, the data is relayed through the intermediate sensory nodes that are placed between the source and the destination. As the main motivation is to keep the design of the transmitter and sensors simple, only a low-complexity AF cooperative diversity protocol that relies on noise variance is considered. In this work, it is assumed that the sensor node would only amplify the received signal and transmit it whereas channel estimation is only performed at the destination node. For AF networks, there exist two choices for estimating the weights, 1) the source-sensor and sensor-destination weights are estimated separately, or 2) the overall source-sensor-destination weight is estimated at the destination. The latter approach achieves higher spectral efficiency and therefore has been adopted in this work. Furthermore, to reduce the computational complexity FDE is implemented that will exploit the diagonal structure of the channel matrices.

The main novelties of the present work are as follows:

1. The extension of the SC-FDE using AF relaying for IoUTs with a goal to provide a simplified and low-complexity multi-hop underwater communication architecture.
2. The proposal of adaptive implementation of FDE to combat the difficulty faced in acquiring channel knowledge in underwater communications. Particularly, two types of adaptive detectors based on the principles of least

mean square (LMS) and recursive least square (RLS) are proposed in this work. Furthermore, the considered FFT structure for the received data only requires diagonal elements that reduce the computational complexity significantly as compared to the available LMS and RLS algorithms in the literature.

The simulation results show that the SC-FDE by using AF relaying for IoUTs, which has lower complexity, wherein simplicity of transmitter and sensors is maintained. In addition the simulations results, shown that the adaptive performance of these two detectors is close to the ideal minimum mean square error (MMSE) detector.

The rest of the paper is organized as: Section 2 describes the system model for SC-FDE underwater cooperative communication systems using the AF protocol. The structure of the transmitter, sensor and receiver is discussed in detail in this section. In Section 3, the optimal and MMSE detectors are discussed. In Section 4, LMS and RLS adaptive detectors are discussed at length. The difference between these detectors and the LMS and RLS algorithms in the literature is also highlighted. The simulation results are provided in section 5, and finally conclusions are given in Section 6.

Throughout this paper, the following notations are used: Bold upper-case letters denote matrices, while bold lower-case letters denote vectors. For arbitrary matrices, A , A^* , A^T , A^H and A^{-1} denote the complex, conjugate, transpose, Hermitian and inverse of the matrix A , respectively. $E[\cdot]$ denotes expectation, $diag(\cdot)$ stands for diagonal matrix, $|\cdot|$ denotes the absolute value and $Tr(\cdot)$ represents the trace of a matrix.

2 System Model

We consider the scenario shown in Figure 1, where a source (S) sends relevant data to the destination (D) with the help of U sensors, denoted by R_1, R_2, \dots, R_U , respectively. The sensors are assumed to possess the capability of relaying data therefore, the terms relay and sensor are used interchangeably. The source is assumed to be far from the destination and therefore no direct communication path exists between the source and the destination. The data transmission is assumed to occur over two separate phases. In phase I, the source broadcasts data to the sensors; while in phase II, the sensors amplify-and-forward the data to the destination.

2.1 Underwater Channel Model

The sound propagation speed is one of the most impactful variables on the performance of IoUTs [22, 11]. The propagation speed of terrestrial radio networks can by contrast reach speeds of 3×10^8 m/s. Thus, its underwater counterpart is slower by a factor of 2×10^5 m/s respectively [22]. Moreover,



Fig. 1 Data acquisition scheme of an underwater cooperative communication system with the assistance of U AF-based sensors.

the complexity and spatial variability of the underwater physical environment create difficulties for IoUTs channels.

The underwater acoustic channel has been shown to be composed of several distinct paths referred to as the eigenpaths [22, 11]. These eigenpaths are composed of a dominant and stable component as well as several smaller random components. The latter are also known as eigenarrays. Due to these characteristics a modified Saleh Valenzuela (SV) model was proposed for an underwater acoustic channel [22, 11, 31]. Based on this model, the channel between any two nodes is expressed as

$$\begin{aligned}
 h_u^k(t) &= \sum_{a=0}^{\alpha-1} \sum_{b=0}^{\beta-1} q_{u,b,a}^k \delta(t - T_{u,b,a}^k - \tau_{u,b,a}^k) \\
 &= \sum_{l=0}^{L-1} q_{u,l}^k \delta(t - \tau_{u,l}^k),
 \end{aligned} \tag{1}$$

where, $k \in \{SR, RD\}$ denotes the source-relay and relay-destination hop, respectively, α denotes the number of eigenpaths and β represents the number of eigenarrays for each eigenpath. For the b -th eigenray of the a -th eigenpath of the u -th relay in the k -th hop, $q_{u,b,a}^k$ represents the fading coefficient, $T_{u,b,a}^k$ is the arrival time of the a -th path/cluster, $\tau_{u,b,a}^k$ is the delay of the b -th ray in the a -th path/cluster, respectively. Equivalently, for the l -th eigenray of the u -th relay in the k -th hop $\tau_{u,l}^k$ represents the delay of the l -th ray, $q_{u,l}^k$ denotes the fading coefficient, respectively, and $L = \alpha\beta$ denotes the number of possible resolvable multipaths.

The distribution of the cluster arrival time and the ray arrival time are modeled by a Poisson distribution and are calculated through the following [22, 11]

$$p(T_{u,b,a}^k | T_{u,b,a-1}^k) = \Lambda \exp[-\Lambda(T_{u,b,a}^k - T_{u,b,a-1}^k)], a > 0 \quad (2)$$

$$p(\tau_{u,b,a}^k | \tau_{u,b-1,a}^k) = \lambda \exp[-\lambda(\tau_{u,b,a}^k - \tau_{u,b-1,a}^k)], b > 0 \quad (3)$$

where, Λ is the arrival rate of the cluster and λ is the arrival rate of the ray within each cluster. Both arrival rates are assumed to be same for each hop. Typically, the underwater acoustic channel is quasi-static [32,33]. This means that the fading coefficient, $q_{u,l}^k$, and the delay, $\tau_{u,l}^k$, remain the same during one transmission burst, but then may change between bursts. The amplitude of the fading coefficient is assumed to follow independent Nakagami- m distribution. The Nakagami- m distribution is a generalized model using which various propagation scenarios can be modeled by the changing of the value of parameter m [34,35]. The probability density function (PDF) of Nakagami- m distribution is given as

$$p_{|q_{u,l}^k|}(r) = \frac{2m_l^{m_l} r^{2m_l-1}}{\Gamma(m_l)\Omega_l^{m_l}} \exp\left(-\frac{m_l}{\Omega_l}\right) r^2, \quad r > 0, \quad (4)$$

where $\Gamma(\cdot)$ is the gamma function, m_l is the fading parameter corresponding to the l -th multipath component and the parameter $\Omega_l = E[|h_l|^2] = 1$. It is assumed that the m_l and Ω_l are the same for each hop [35]. Furthermore, it is assumed that the fading channel-induced phase rotation is uniformly distributed in $[0, 2\pi]$ [36].

2.2 Data Transmission

Figure 2 shows the block diagram of the cooperative communication for IoUTs. The communication occurring in each phase is discussed in detail below:

Phase-I: Transmission from Source

The source desires to transmit the data vector $\mathbf{x} = [x(0), x(1), \dots, x(N-1)]^T$ of length N where $x(i)$ denotes the i -th data symbol chosen from a M -ary constellation and each symbol is assumed to be equally likely. In order to ensure circular convolution between the channel and transmitted data, so that the inter-block interference is removed through FFT-based demodulation at the receiver, a cyclic prefix (CP) of length L is appended to the data vector \mathbf{x} . This CP is required to have a length greater than the maximum delay profile of the channel [30]. The transmitted data vector with the CP is represented as

$$\mathbf{x}_{CP} = \underbrace{[x(N-L+1), \dots, x(N-1)]}_{CP} \underbrace{[x(0), x(1), \dots, x(N-1)]}_{\mathbf{x}}^T. \quad (5)$$

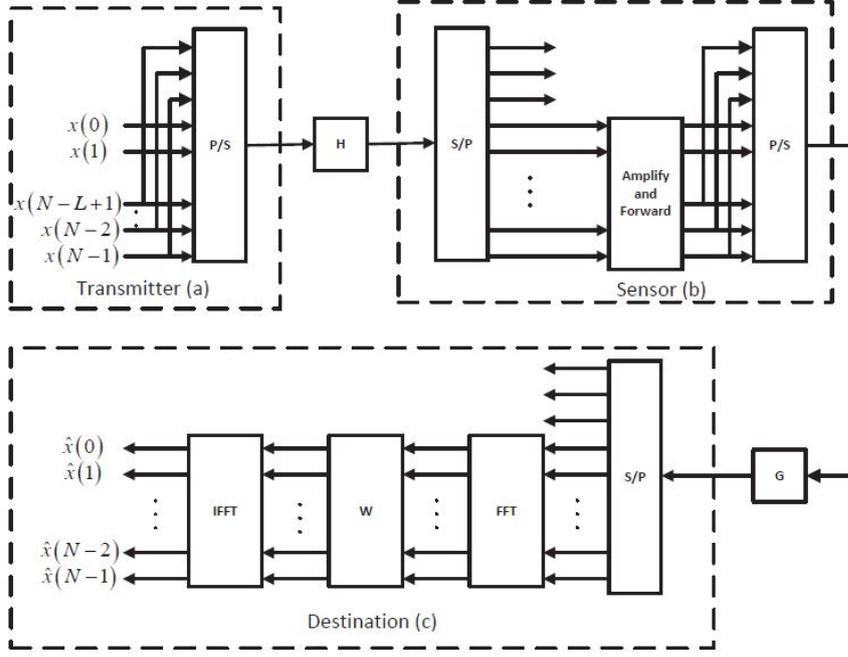


Fig. 2 Block diagram of a cooperative communication for IoUTs.

The data vector \mathbf{x}_{CP} is converted from parallel-to-serial (P/S) prior to transmission.

Phase-II: Transmission from the Relays to the Destination

The signal transmitted from the source is received at the u -th relay after being convolved with the respective channel, $h_u^{SR}(t)$, where $u = \{1, 2, \dots, U\}$. Each relay first converts the signal from serial-to-parallel (S/P) and discards the first $(L - 1)$ CP samples. The signal after the CP has been removed at the u -th relay, is expressed as

$$\mathbf{y}_u = \mathbf{H}_u \mathbf{x} + \mathbf{n}_u, \quad (6)$$

where $\mathbf{n}_u = [n_u(0), n_u(1), \dots, n_u(N - 1)]^T$ denotes the noise vector at the u -th relay, $n_u(i)$ is modeled as complex additive white Gaussian noise (AWGN) with mean zero and variance $\sigma_{n_u}^2/2$ per dimension and \mathbf{H}_u is a $N \times N$ channel matrix for the source to the u -th relay and is given in (7).

It then amplifies the remaining samples with a fixed gain ζ_u , adds another CP and forwards the signal to the destination after P/S conversion. Without a loss of generality, the CP length at the transmitter and the relay/sensor are assumed to be same and is selected based on the channel with the maximum

$$\mathbf{H}_u = \begin{bmatrix} h_u^{SR}(0) & 0 & \dots & \dots & 0 & h_u^{SR}(L-1) & \dots & h_u^{SR}(1) \\ h_u^{SR}(1) & \ddots & \ddots & \ddots & \ddots & \ddots & \ddots & \vdots \\ \vdots & \ddots & h_u^{SR}(0) & \ddots & \ddots & \ddots & \ddots & h_u^{SR}(L-1) \\ h_u^{SR}(L-1) & \vdots & h_u^{SR}(1) & \ddots & \ddots & \ddots & \ddots & 0 \\ 0 & \ddots & \vdots & \ddots & \ddots & \ddots & \ddots & \vdots \\ \vdots & \ddots & h_u^{SR}(L-1) & \vdots & \ddots & h_u^{SR}(0) & \ddots & \vdots \\ \vdots & \ddots & \ddots & \ddots & \vdots & h_u^{SR}(1) & \ddots & 0 \\ 0 & \dots & \dots & 0 & \ddots & \ddots & 0 & h_u^{SR}(0) \end{bmatrix}. \quad (7)$$

delay profile. As the relay node is assumed to have a low complexity, fixed gain amplifying is performed at the relay. The fixed gain ζ_u is expressed as

$$\zeta_u = \sqrt{\frac{1}{\sigma_{h_u^{SR}}^2 + \sigma_{n_u}^2}}. \quad (8)$$

This fixed-gain ensures the maintenance of the average or long-term power constraint. However, it also allows the instantaneous transmit power to be much larger than the average when necessary [18]. The amplified received signal at the u -th relay after the appending the CP is given as

$$\mathbf{y}_{u,CP} = \zeta_u \begin{bmatrix} \underbrace{y_u(N-L+1), \dots, y_u(N-1)}_{CP_u} \\ \underbrace{y_u(0), y_u(1), \dots, y_u(N-1)}_{\mathbf{y}_u} \end{bmatrix}^T. \quad (9)$$

2.3 Receiver Structure

In Fig. 2(c) the receiver converts the signal for the last time to parallel and applies the FFT transform, convolves the signal with the weight matrix \mathbf{W} , and applies the IFFT to detect the transmitted signals. From this figure it can be observed that the transmitter only requires a buffer to store N symbols and requires a P/S convertor to carry out the transmission. Furthermore, the sensors will require S/P and P/S convertors and an amplifying and forwarding block, as well as the maximal delay profile of the channel so that an appropriate CP length can be added. Therefore, by employing an SC-FDE system, use of an inexpensive transmitter and sensors for underwater communication is possible. Each relay forwards the signal to the destination in different time slots and

$$\mathbf{G}_u = \begin{bmatrix} h_u^{RD}(0) & 0 & \dots & \dots & 0 & h_u^{RD}(L-1) & \dots & h_u^{RD}(1) \\ h_u^{RD}(1) & \ddots & \ddots & \ddots & \ddots & \ddots & \ddots & \vdots \\ \vdots & \ddots & h_u^{RD}(0) & \ddots & \ddots & \ddots & \ddots & h_u^{RD}(L-1) \\ h_u^{RD}(L-1) & \vdots & h_u^{RD}(1) & \ddots & \ddots & \ddots & \ddots & 0 \\ 0 & \ddots & \vdots & \ddots & \ddots & \ddots & \ddots & \vdots \\ \vdots & \ddots & h_u^{RD}(L-1) & \vdots & \ddots & h_u^{RD}(0) & \ddots & \vdots \\ \vdots & \ddots & \ddots & \ddots & \vdots & h_u^{RD}(1) & \ddots & 0 \\ 0 & \dots & \dots & 0 & \ddots & \ddots & 0 & h_u^{RD}(0) \end{bmatrix}. \quad (11)$$

the signal transmitted from the u -th relay is received at the destination after being convolved with the respective channel, $h_u^{RD}(t)$, where $u = \{1, 2, \dots, U\}$. The destination performs S/P conversion and then discards the first $(L-1)$ CP samples. The received signal at the destination from the u -th relay, after removing the CP, is given as

$$\begin{aligned} \mathbf{r}_u &= \mathbf{G}_u \mathbf{y}_u + \mathbf{n}_{D,u}, \\ &= \underbrace{\mathbf{G}_u \zeta_u \mathbf{H}_u \mathbf{x}}_{\mathbf{C}_u} + \underbrace{\mathbf{G}_u \zeta_u \mathbf{n}_u + \mathbf{n}_{D,u}}_{\mathbf{v}_u} \end{aligned} \quad (10)$$

where $\mathbf{n}_{D,u} = [n_{D,u}(0), n_{D,u}(1), \dots, n_{D,u}(N-1)]^T$ denotes the noise vector at the destination during the u -th relay transmission, $n_{D,u}(i)$ is modeled as complex AWGN with mean zero and variance $\sigma_D^2/2$ per dimension and \mathbf{G}_u is a $N \times N$ channel matrix for the u -th relay to destination channel and is given in (11). It can be noted that \mathbf{C}_u is a circulant matrix as it is a product of two circulant matrices. Acknowledging this property helps in determining the modified LMS and RLS adaptive algorithms.

The overall noise at the destination, \mathbf{v}_u , can be approximated as complex Gaussian noise with zero mean and covariance matrix [37,38]

$$\Sigma v_u = \zeta_u^2 \mathbf{G}_u \mathbf{G}_u^H \sigma_u^2 + \sigma_D^2 \mathbf{I}_N, \quad (12)$$

where \mathbf{I}_N denotes an identity matrix of size $N \times N$. Finally, the combined received signals from all the relays can be expressed as

$$\begin{aligned} \mathbf{r}_D &= \sum_{u=1}^U \mathbf{r}_u \\ &= \sum_{u=1}^U \mathbf{C}_u \mathbf{x} + \sum_{u=1}^U \mathbf{v}_u \\ &= \mathbf{D} \mathbf{x} + \mathbf{n}. \end{aligned} \quad (13)$$

It is worth noting here that \mathbf{D} will also be circulant. This is because the summation of circulant matrices is also itself circulant. The FFT of the received

signal yield can be calculated as

$$\begin{aligned}\mathbf{r}(f) &= \mathbf{F}\mathbf{r}_D = \mathbf{F}\mathbf{D}\mathbf{x} + \mathbf{F}\mathbf{n} \\ &= \underbrace{\mathbf{F}\mathbf{D}\mathbf{F}^H}_{\Xi} \mathbf{s}(f) + \mathbf{F}\mathbf{n},\end{aligned}\quad (14)$$

where, \mathbf{F} represents the FFT and $\mathbf{s}(f) = \mathbf{F}\mathbf{x}$ represents transmitted signal \mathbf{x} in the frequency domain. To detect the $\mathbf{s}(f)$, a FDE is utilized at the receiver. After obtaining the estimate of $\mathbf{s}(f)$, an inverse FFT is carried out to obtain the estimate of the transmitted signal \mathbf{x} . In the following section, the design of the FDE for the detection of $\mathbf{s}(f)$ is presented.

3 Frequency Domain Detectors

3.1 Optimal Detector

The maximal likelihood (ML) detector is an optimal detector using which $\mathbf{s}(f)$ can be detected as

$$\begin{aligned}\hat{\mathbf{s}}(f) &= \arg \min_{\mathbf{s}(f)} \|\Sigma^{-1/2}(\mathbf{r}(f) - \Xi\mathbf{s}(f))\|^2 \\ &= \arg \min_{\mathbf{s}(f)} (\mathbf{r}(f) - \Xi\mathbf{s}(f))^H \Sigma^{-1} (\mathbf{r}(f) - \Xi\mathbf{s}(f)),\end{aligned}\quad (15)$$

where $\Sigma = \mathbf{F}(\sum_{u=1}^U \Sigma_{v_u})\mathbf{F}^H$. The process of minimization is conducted over all the possible combinations of the constellation symbols. For larger constellations, the ML Detector is considered to be intractable. Furthermore the complexity of the ML detector has been proven to be the equivalent of $O(L^{6.5})$, wherein L is the number of relays [38]. The complexity increases in cooperative systems which include more relays, thus rendering the ML detector impractical.

Linear suboptimal detectors are employed to mitigate this issue. These detectors have a lower computational complexity than their ML counterparts.

3.2 MMSE Detector

A linear transformation is applied to the received signal $\mathbf{r}(f)$ by multiplying it by a weight matrix $\mathbf{W}^H(f)$, which minimizes the mean-square error (MSE) between the transmitted symbol vector, $\mathbf{s}(f)$, and the detected symbol vector, $\hat{\mathbf{s}}(f)$ i.e.

$$\hat{\mathbf{s}}(f) = \mathbf{W}^H(f)\mathbf{r}(f),\quad (16)$$

where the optimal weight matrix $\mathbf{W}(f)$ is obtained as [39]

$$\mathbf{W}(f) = \arg \min_{\mathbf{W}} E[\|\mathbf{s}(f) - \mathbf{W}^H(f)\mathbf{r}(f)\|^2],\quad (17)$$

(17) can be solved to yield the optimum weight matrix $\mathbf{W}(f)$ as

$$\mathbf{W}(f) = \mathbf{R}^{-1}(f)\mathbf{\Psi}(f), \quad (18)$$

where $\mathbf{\Psi}(f) = E[\mathbf{r}(f)\mathbf{s}(f)^H]$ represents the cross-correlation between $\mathbf{r}(f)$ and $\mathbf{s}(f)$, while $\mathbf{R}(f) = E[\mathbf{r}(f)\mathbf{r}(f)^H]$ is the auto-correlation of $\mathbf{r}(f)$. These can be represented as

$$\mathbf{\Psi}(f) = \mathbf{\Xi} = \mathbf{F}\mathbf{D}\mathbf{F}^H, \quad (19)$$

$$\mathbf{R}(f) = \mathbf{\Xi}\mathbf{\Xi}^H + \mathbf{\Sigma} = \mathbf{F}\mathbf{D}\mathbf{D}^H\mathbf{F}^H + \mathbf{\Sigma}. \quad (20)$$

(18) illustrates that the MMSE detector's complexity is determined by the calculation of inverse of matrix $\mathbf{R}(f)$. $\mathbf{R}(f)$ is a $N \times N$ matrix, therefore the computational complexity for calculating its inverse is of $O(N^3)$ [40]. However, with the introduction of CP and FFT, $\mathbf{\Psi}(f)$ is now a diagonal matrix. The inversion of a diagonal matrix has a significantly lower complexity of $O(N)$, resulting the MMSE detector having the complexity level of a maximal ratio combiner (MRC) [18]. Furthermore, it can be noted from (18), (19) and (20), that channel state information (CSI) is required to compute $\mathbf{W}(f)$. Determining this accurately is difficult in IoUTs for several reasons. Firstly, the received underwater signal is made up of numerous multipath components, and each of these components has very low energy. Secondly, for AF based relaying the received channel is a cascade model, consisting of the source to the sensor and the sensor to the destination channel. This further complicates the (CSI) estimation [41, 42]. Thirdly, the noise propagation from each cooperating relay to the destination is different, as each relay experiences different channel gain. In response to these observations, adaptive algorithms are used to establish a sub-optimal solution to the optimum weight matrix \mathbf{W} in (18), and thus, arrive at the optimum MMSE solution achievable through iterative computing [39].

4 Adaptive Detection

In this section, two different approaches for constructing adaptive detectors are presented. The first is a stochastic gradient based algorithm, also termed the LMS adaptive algorithm [39, 36]. The second approach is based on the least square (LS) adaptive algorithm, also called the recursive least squares (RLS) algorithm [39]. The LMS algorithm is low complexity and uses stochastic gradient technique to find the suboptimal weight matrix. On the contrary, the RLS algorithm gives better estimate of the matrix, as will be shown in the simulation results, but this comes at a cost of higher processing as RLS has more calculation steps compared to the LMS algorithm. As FFT and IFFT introduces a structure to the received signal, $\mathbf{F}^H\mathbf{W}\mathbf{F}$ becomes diagonal and \mathbf{W} becomes circulant. Thus, the complete matrix can be reconstructed using only a row or a column of \mathbf{W} which reduces the computations significantly. The properties of \mathbf{W} can be understood as following:

$$\mathbf{W} = \text{diag}[w_0, w_1, \dots, w_{(N-1)}], \quad (21)$$

where, “diag” stands for diagonal matrix. Thus, only the N diagonal elements of the matrix \mathbf{W} need to be computed, while the LMS and RLS of the considered literature required $(N \times N)$ elements. This further reduces the computational complexity in comparison with the algorithmic counterparts proposed in the literature.

4.1 LMS Algorithm

As discussed previously, using stochastic gradient technique, the LMS algorithm calculates a sub-optimal weight matrix for \mathbf{W} in (18), and ensures that the mean-square error (MSE) is similar to the MSE for the ideal MMSE detector. The steps of the algorithm are outlined below.

1. Initialize the weights of the filter $\mathbf{w}_0 = \mathbf{0}$, when lacking any priori information.
2. Choose a suitable step-size μ , such as $\mathbf{0} \leq \mu \leq \frac{2}{E\|\mathbf{r}(f)\|^2}$.
3. Calculate the estimated error between the transmitted and detected symbols using

$$\mathbf{e}_i(f) = \mathbf{s}_i(f) - \mathbf{w}_i^H \mathbf{r}_i(f), \quad (22)$$

where i represents the frame index.

4. Update the weight vector as

$$\mathbf{w}_{(i+1)} = \mathbf{w}_i - \mu \mathbf{r}_i(f) \odot \mathbf{e}_i^H(f), \quad (23)$$

where \odot denotes the Hadamard product.

4.2 RLS Algorithm

The RLS adaptive algorithm is capable of significantly faster convergence speed compared to the LMS adaptive algorithm. However, this comes at the cost of higher computational complexity. It uses the detected data to improve the convergence speed as well as the detection performance. The steps of the algorithm are outlined below.

1. Initialize the weights of the filter $\mathbf{w}_0 = \mathbf{0}$, when lacking any priori information.
2. Initialize the inverse of the autocorrelation matrix $\mathbf{P}_0(f) = \mathbf{R}^{-1}(f) = \mathbf{I}$.
3. Choose a suitable forgetting factor λ_{RLS} such that $0 \leq \lambda_{RLS} \leq 1$.
4. Calculate the gain vector $\mathbf{k}_i(f)$ as

$$\mathbf{k}_i(f) = \frac{\lambda_{RLS}^{-1} \mathbf{P}_{(i-1)}(f) \mathbf{r}_i(f)}{1 + \lambda_{RLS}^{-1} \mathbf{r}_i^H(f) \mathbf{P}_{(i-1)}(f) \mathbf{r}_i(f)}, \quad (24)$$

where i represents the frame index.

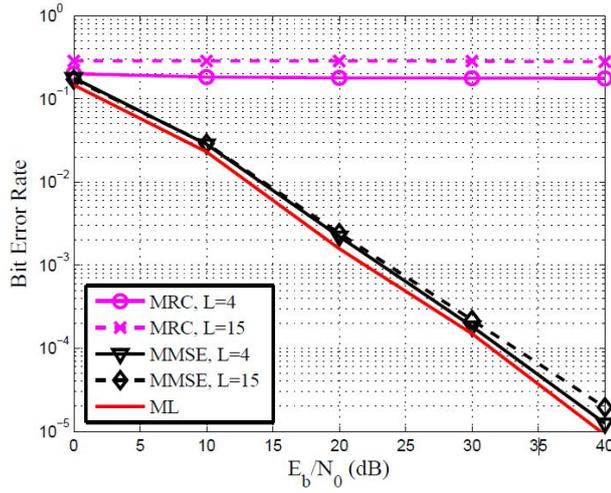


Fig. 3 BER versus SNR performance of an AF underwater communication system when using a single relay with different detectors.

- Determine the estimated error between the transmitted and detected symbols as

$$\mathbf{e}_i(f) = \mathbf{s}_i(f) - \mathbf{w}_i^H \mathbf{r}_i(f). \quad (25)$$

- Update the weight vector using

$$\mathbf{w}_i = \mathbf{w}_{(i-1)} + \mathbf{k}_i(f) \odot \mathbf{e}_i^H(f). \quad (26)$$

- Update the inverse of the autocorrelation matrix as

$$\mathbf{P}_i(f) = \lambda_{RLS}^{-1} \mathbf{P}_{(i-1)}(f) - \lambda_{RLS}^{-1} \mathbf{k}_i(f) \mathbf{r}_i^H(f) \mathbf{P}_{(i-1)}(f). \quad (27)$$

5 Simulation Results and Discussions

In this section, numerical simulation results are presented to compare the performance of the proposed LMS and RLS algorithms with that of the MMSE and ML detection algorithms. In the simulations, the SV channel model using the following parameters was simulated; $1/\Lambda = 14.99\text{ns}$, $1/\lambda = 0.476\text{ns}$, $\Gamma = 0.024\text{ns}$ and $\gamma = 0.12\text{ns}$. Γ and γ are the power decay coefficients for clusters and multipath, respectively. The number of multipaths for the source to sensor and sensor to destination were assumed to be the same, and the Nakagami- m parameter was fixed to $m_l = 1.3$.

For a network consisting of only one relay/sensor, Figure 3 shows the BER performance of the MRC, MMSE and ML detectors. Complete CSI is assumed to be available to the ML detectors. The number of multipaths considered are $L = 4$ and $L = 15$. It can be observed, that as the number of multipaths increases, the performance of the MRC detector degrades as the MRC does

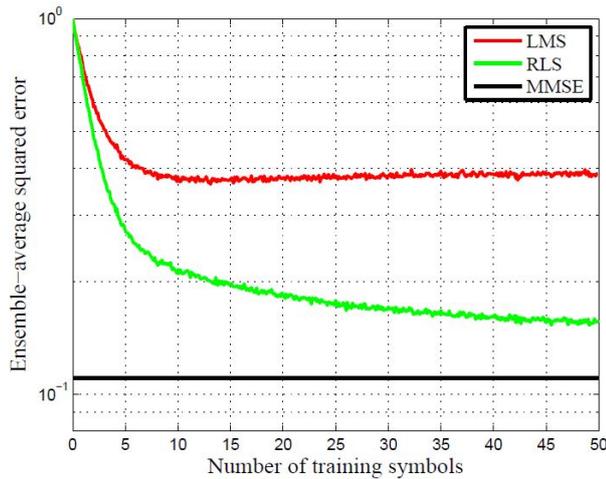


Fig. 4 Convergence performance of LMS and RLS adaptive detector for underwater communication system.

not have the ability to mitigate multipaths. The BER performance of the MMSE receiver is not affected by an increased number of multipaths. It is worth noting that the complexity of MMSE and MRC is of the order $O(N)$. Its performance is also similar to that of the ML detector, which has a complexity of $O(N^{6.5})$. Thus, it could be argued that employing SC-FDMA with the MMSE detector could resolve the multipaths issue in underwater communications.

Figure 4 illustrates the convergence of the proposed LMS and RLS detectors for a single relay network. During the simulations, the ensemble-average squared error was obtained by averaging over 100,000 independent channel realizations at $E_b/N_0 = 5$ dB. The forgetting factor of RLS was fixed to $\lambda_{RLS} = 0.995$ while the step size of the LMS algorithm was fixed to $\mu = 0.05$. It can be noted that convergence of the proposed RLS adaptive detector is superior to that of the proposed LMS based adaptive detector. Moreover, training length of 50 symbols is sufficient for algorithm convergence.

Figure 5 compares the BER performance of both the LMS and RLS adaptive detectors when the relay is moving at different velocities. The multipath numbers were fixed to $L = 15$. It can be observed that, for 10 km/hr, the RLS detector gives lower BER compared to the the LMS detector and is just 1 dB away from the ML detector which has complete CSI knowledge. This shows that the low complexity RLS detector is ideal for practical deployment. In addition, the other obvious trend which can be observed is that as the velocity increases, the BER increases.

Figure 6 shows the effect of sensor placement when the source and sensor are transmit with the same power. The normalized doppler frequency was fixed to 0.001. The figure reports an SNR = 0,10,20 and 30 dB respectively. The

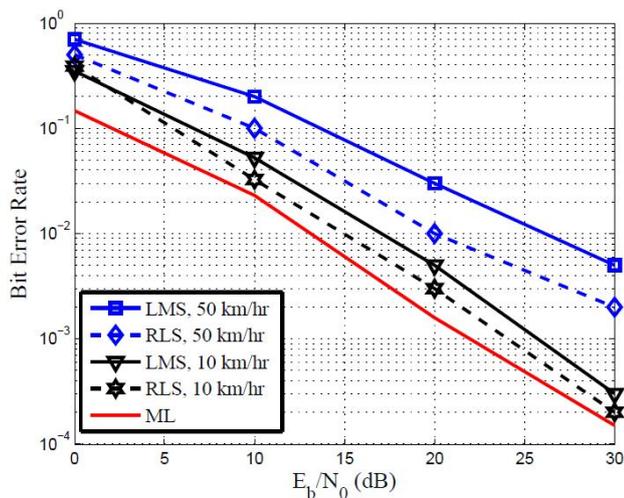


Fig. 5 BER versus SNR performance of an AF underwater communication system when using a single relay with different doppler frequency.

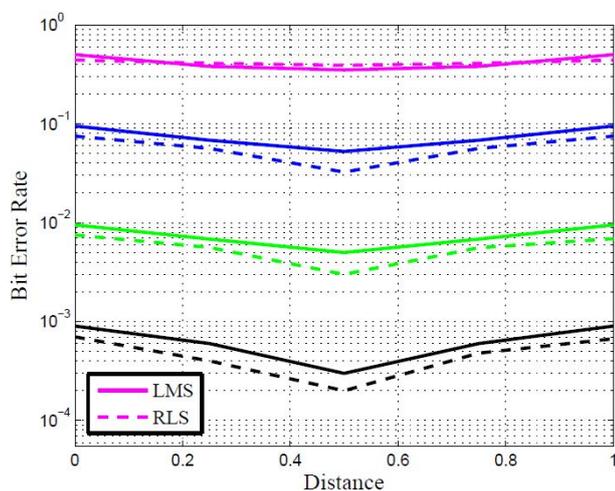


Fig. 6 BER of the AF scheme as a function of distance for underwater communication system.

SNR decreases from bottom to top. For ease, the distance between the source and relay has been kept at δ , while that between the relay and destination was $(1 - \delta)$. The best position seems here to have been achieved when the relay is equidistant between the source and destination. It can also be observed that for higher SNRs, the RLS algorithm always perform better compared to the LMS detector.

Figure 7 shows the impact of multiple relays on the underwater communication system. The BER is plotted for the RLS adaptive algorithm. It can

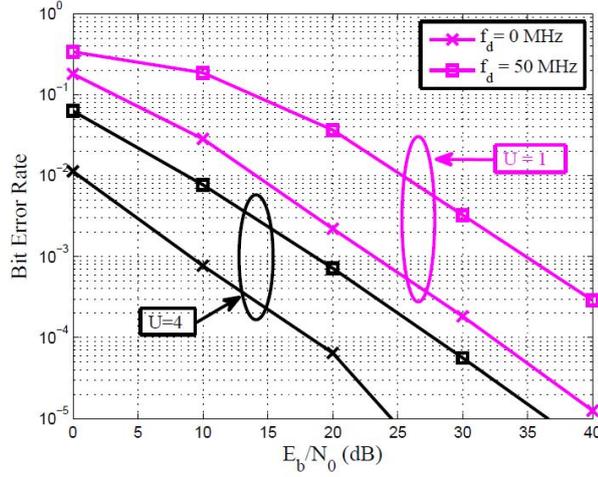


Fig. 7 BER versus SNR performance of an AF underwater communication system when using multiple relays with different doppler frequency.

be observed that as the number of relays increases, the BER performance of the detector improves. Furthermore, the RLS adaptive detector exhibits good performance even for different normalized doppler frequencies, wherein 0 MHz corresponds to the stationary relay and 50 MHz corresponds to a movement of approximately 90 km/hr.

6 Conclusion

In this contribution, the use of SC-FDE detectors for underwater communication systems alongside the AF protocol has been discussed. Specifically, the ML, the ideal MMSE and two types of adaptive detectors - namely the LMS and RLS. Furthermore, the approach of measuring both the source sensor and sensor destination weights together to improve the spectral efficiency of these detectors was adopted. It can be concluded from the results herein that the considered adaptive detectors could inform numerous novel detection schemes for SC-FDE underwater cooperative communication systems. The simulation results suggest that the considered adaptive detection schemes can achieve BER performance similar to that of the ideal ML detector, which requires ideal channel knowledge. The RLS adaptive detector can achieve the best BER performance, but with a higher detection complexity than that of the LMS adaptive detector.

Declarations

Funding No funds, grants, or other support was received.

Conflict of interest The authors declare that they have no conflict of interest.

Availability of data and material Data sharing not applicable to this article as no datasets were generated or analysed during the current study.

Code availability Not applicable.

Ethical Approval Not applicable as the research did not involve any Human Participants and/or Animals.

Consent to participate Not applicable.

Consent for publication Not applicable.

Authors Contributions

- Conceptualization: Amer Aljanabi, Osama Alluhaibi, Qasim Z. Ahmed, and Waqas-Bin-Abbas;
- Methodology: Amer Aljanabi, Osama Alluhaibi, and Qasim Z. Ahmed;
- Writing - original draft preparation: Amer Aljanabi, Osama Alluhaibi, Qasim Z. Ahmed, and Fahd A. Khan;
- Writing - review and editing: Qasim Z. Ahmed, Fahd A. Khan, Waqas-Bin-Abbas, and Pavlos Lazaridis;
- Supervision: Osama Alluhaibi, Qasim Z. Ahmed, and Pavlos Lazaridis.

References

1. M. Erol-Kantarci, H. T. Mouftah and S. Oktug, "A Survey of Architectures and Localization Techniques for Underwater Acoustic Sensor Networks," in *IEEE Communications Surveys & Tutorials*, vol. 13, no. 3, pp. 487-502, Third Quarter 2011.
2. Q. Wang, H. Dai, Q. Wang, M. K. Shukla, W. Zhang and C. G. Soares, "On Connectivity of UAV-Assisted Data Acquisition for Underwater Internet of Things," in *IEEE Internet of Things Journal*, vol. 7, no. 6, pp. 5371-5385, June 2020.
3. Y. Song, "Underwater Acoustic Sensor Networks With Cost Efficiency for Internet of Underwater Things," in *IEEE Transactions on Industrial Electronics*, vol. 68, no. 2, pp. 1707-1716, Feb. 2021.
4. W. Liu, J. Ding, J. Zheng, X. Chen and C. -L. I, "Relay-Assisted Technology in Optical Wireless Communications: A Survey," in *IEEE Access*, vol. 8, pp. 194384-194409, 2020.
5. M. Jouhari, K. Ibrahim, H. Tembine and J. Ben-Othman, "Underwater Wireless Sensor Networks: A Survey on Enabling Technologies, Localization Protocols, and Internet of Underwater Things," in *IEEE Access*, vol. 7, pp. 96879-96899, 2019.
6. L. Shen, Y. Zakharov, B. Henson, N. Morozs and P. D. Mitchell, "Adaptive Filtering for Full-Duplex UWA Systems With Time-Varying Self-Interference Channel," in *IEEE Access*, vol. 8, pp. 187590-187604, 2020.
7. Y. Chen, X. Jin, L. Wan, X. Zhang and X. Xu, "Selective Dynamic Coded Cooperative Communications for Multi-Hop Underwater Acoustic Sensor Networks," in *IEEE Access*, vol. 7, pp. 70552-70563, 2019.
8. K. Hao, Q. Xue, C. Li and K. Yu, "A Hybrid Localization Algorithm Based on Doppler Shift and AOA for an Underwater Mobile Node," in *IEEE Access*, vol. 8, pp. 181662-181673, 2020.
9. L. Wang, Z. Jiang and H. Wang, "A Bayesian Receiver for Semiblind Equalization in Sparse Underwater Acoustic Channels Using Bernoulli Priors," in *IEEE Access*, vol. 8, pp. 164120-164129, 2020.
10. A. Doosti-Aref and A. Ebrahimzadeh, "Adaptive Relay Selection and Power Allocation for OFDM Cooperative Underwater Acoustic Systems" in *IEEE Transactions on Mobile Computing*, vol. 17, no. 01, pp. 1-15, 2018.
11. X. Cheng, H. Shu, Q. Liang and D. H. Du, "Silent Positioning in Underwater Acoustic Sensor Networks," in *IEEE Transactions on Vehicular Technology*, vol. 57, no. 3, pp. 1756-1766, May 2008.

12. Y. -H. Cho and H. -L. Ko, "Channel Estimation Based on Adaptive Denoising for Underwater Acoustic OFDM Systems," in *IEEE Access*, vol. 8, pp. 157197-157210, 2020.
13. R. Boluda-Ruiz, P. Rico-Pinazo, B. Castillo-Vázquez, A. García-Zambrana and K. Qaraqe, "Impulse Response Modeling of Underwater Optical Scattering Channels for Wireless Communication," in *IEEE Photonics Journal*, vol. 12, no. 4, pp. 1-14, Aug. 2020.
14. K. Tu, D. Fertoni, T. M. Duman, M. Stojanovic, J. G. Proakis and P. Hursky, "Mitigation of Intercarrier Interference for OFDM Over Time-Varying Underwater Acoustic Channels," in *IEEE Journal of Oceanic Engineering*, vol. 36, no. 2, pp. 156-171, April 2011.
15. L. Wan et al., "Adaptive Modulation and Coding for Underwater Acoustic OFDM," in *IEEE Journal of Oceanic Engineering*, vol. 40, no. 2, pp. 327-336, April 2015.
16. L. Ma, H. Jia, S. Liu and I. U. Khan, "Low-Complexity Doppler Compensation Algorithm for Underwater Acoustic OFDM Systems With Nonuniform Doppler Shifts," in *IEEE Communications Letters*, vol. 24, no. 9, pp. 2051-2054, Sept. 2020.
17. X. Zhao, D. Pompili and J. Alves, "Underwater Acoustic Carrier Aggregation: Achievable Rate and Energy-Efficiency Evaluation," in *IEEE Journal of Oceanic Engineering*, vol. 42, no. 4, pp. 1035-1048, Oct. 2017.
18. Q. Z. Ahmed, K. Park, M. Alouini and S. Aïssa, "Compression and Combining Based on Channel Shortening and Reduced-Rank Techniques for Cooperative Wireless Sensor Networks," in *IEEE Transactions on Vehicular Technology*, vol. 63, no. 1, pp. 72-81, Jan. 2014.
19. Z. Han, Y. L. Sun and H. Shi, "Cooperative Transmission for Underwater Acoustic Communications," 2008 IEEE International Conference on Communications, Beijing, 2008, pp. 2028-2032.
20. S. Ahmed, N. Javaid, F. A. Khan, et al., "Co-UWSN: Cooperative Energy-Efficient Protocol for Underwater WSNs. International Journal of Distributed Sensor Networks," April 2015.
21. L. Chen, Y. Hu, Y. Sun, H. Liu, B. Lv and J. Chen, "An Underwater Layered Protocol Based on Cooperative Communication for Underwater Sensor Network," 2020 Chinese Control And Decision Conference (CCDC), Hefei, China, 2020, pp. 2014-2019.
22. Q. Liang, B. Zhang, C. Zhao and Y. Pi, "TDoA for Passive Localization: Underwater versus Terrestrial Environment," in *IEEE Transactions on Parallel and Distributed Systems*, vol. 24, no. 10, pp. 2100-2108, Oct. 2013.
23. Z. Gong, C. Li and F. Jiang, "Analysis of the Underwater Multi-Path Reflections on Doppler Shift Estimation," in *IEEE Wireless Communications Letters*, vol. 9, no. 10, pp. 1758-1762, Oct. 2020.
24. B. Zhang, Y. Hu, H. Wang and Z. Zhuang, "Underwater Source Localization Using TDOA and FDOA Measurements With Unknown Propagation Speed and Sensor Parameter Errors," in *IEEE Access*, vol. 6, pp. 36645-36661, 2018.
25. M. R. B. Boopathi Rajan and A. R. Mohanty, "Time delay estimation using wavelet denoising maximum likelihood method for underwater reverberant environment," in *IET Radar, Sonar & Navigation*, vol. 14, no. 8, pp. 1183-1191, 8 2020.
26. Z. Wang, S. Zhou, G. B. Giannakis, C. R. Berger and J. Huang, "Frequency-Domain Oversampling for Zero-Padded OFDM in Underwater Acoustic Communications," in *IEEE Journal of Oceanic Engineering*, vol. 37, no. 1, pp. 14-24, Jan. 2012.
27. E. Balevi and A. O. Yilmaz, "Analysis of Frequency Domain Oversampled MMSE SC-FDE," in *IEEE Communications Letters*, vol. 20, no. 2, pp. 232-235, Feb. 2016.
28. Jian Zhang, Y. R. Zheng and C. Xiao, "Frequency-domain equalization for single carrier MIMO underwater acoustic communications," *OCEANS 2008, Quebec City, QC, 2008*, pp. 1-6.
29. C. He, R. Xi, H. Wang, L. Jing, W. Shi, and Q. Zhang, "Single Carrier with Frequency Domain Equalization for Synthetic Aperture Underwater Acoustic Communications," in *Sensors*, vol. 17, no. 07, 2017.
30. X. Tu, A. Song and X. Xu, "Prefix-Free Frequency Domain Equalization for Underwater Acoustic Single Carrier Transmissions," in *IEEE Access*, vol. 6, pp. 2578-2588, 2018.

31. A. A. M. Saleh and R. Valenzuela, "A Statistical Model for Indoor Multipath Propagation," in *IEEE Journal on Selected Areas in Communications*, vol. 5, no. 2, pp. 128-137, February 1987.
32. N. Morozs, W. Gorma, B. T. Henson, L. Shen, P. D. Mitchell and Y. V. Zakharov, "Channel Modeling for Underwater Acoustic Network Simulation," in *IEEE Access*, vol. 8, pp. 136151-136175, 2020.
33. D. Sun, X. Hong, H. Cui and L. Liu, "A Symbol-Based Passband Doppler Tracking and Compensation Algorithm for Underwater Acoustic DSSS Communications," in *Journal of Communications and Information Networks*, vol. 5, no. 2, pp. 168-176, June 2020.
34. Q. Z. Ahmed and L. Yang, "Performance of Hybrid Direct-Sequence Time-Hopping Ultrawide Bandwidth Systems in Nakagami-M Fading Channels," 2007 IEEE 18th International Symposium on Personal, Indoor and Mobile Radio Communications, Athens, Greece, 2007, pp. 1-5.
35. M. K. Simon and M. S. Alouini, "Digital Communications over fading channels," 2nd edition in Wiley Series in Telecommunications and Signal Processing, 2005.
36. Q. Z. Ahmed, W. Liu and L. Yang, "Least Mean Square Aided Adaptive Detection in Hybrid Direct-Sequence Time-Hopping Ultrawide Bandwidth Systems," in *VTC Spring 2008 - IEEE Vehicular Technology Conference*, Marina Bay, Singapore, 2008, pp. 1062-1066.
37. F. A. Khan, Y. Chen and M. Alouini, "Novel Receivers for AF Relaying with Distributed STBC Using Cascaded and Disintegrated Channel Estimation," in *IEEE Transactions on Wireless Communications*, vol. 11, no. 4, pp. 1370-1379, April 2012.
38. Q. Z. Ahmed, M. S. Alouini and S. Aissa, "Bit Error-Rate Minimizing Detector for Amplify-and-Forward Relaying Systems Using Generalized Gaussian Kernel," in *IEEE Signal Processing Letters*, vol. 20, no. 1, pp. 55-58, Jan. 2013.
39. S. S. Haykin, "Adaptive Filter theory," Pearson, 5th edition, 2013.
40. A. Abuzaid, Q. Z. Ahmed and M. Alouini, "Joint Preprocessor-Based Detector for Cooperative Networks with Limited Hardware Processing Capability," in *IEEE Signal Processing Letters*, vol. 22, no. 2, pp. 216-219, Feb. 2015.
41. F. Gao, T. Cui, and A. Nallanathan, "On channel estimation and optimal training design for amplify and forward relay networks," in *IEEE Transactions on Wireless Communications*, vol. 7, no. 5, pp. 1907-1916, May 2008.
42. C. S. Patel and G. L. Stuber, "Channel estimation for amplify and forward relay based cooperation diversity systems," in *IEEE Transactions on Wireless Communications*, vol. 6, no. 6, pp. 2348-2355, Jun. 2007.

AMER ALJANABI received the B.Eng. degree in electrical engineering from the University of Technology, Baghdad, Iraq in 2005; Degree of Master (MSc.) in Systems Engineering and Engineering Management School of Engineering, University of Bolton, Northwest, Greater Manchester, UK in 2018. He is currently pursuing the Ph.D. degree in electrical and electronic engineering with the University of Huddersfield. His research interests include wireless technology aimed for underwater acoustic communication and underwater acoustic channel estimation techniques.

Osama Alluhaibi received the B.E. degree in electrical and communications engineering from the University of Baghdad, Iraq, in 2006, the M.Sc. degree in electronics and communications engineering from the Sam Higginbottom Institute of Agriculture, Technology and Sciences, India, in 2012, and the Ph.D. degree in electronics and communications engineering from the University of Kent, Canterbury, U.K., in 2018. From 2007 to 2010, he was associated with ABB Group, and Kalimat Telecom. In July 2018, he joined the Connectivity Group, WMG's Intelligent Vehicles Research Team, University of Warwick, U.K., as a Research Fellow. His research interests include hybrid beamforming, performance analysis of 5G millimeter-wave wireless communications systems, and 5G millimeter-wave communication for Industrial Internet of Things applications.



Qasim Zeeshan Ahmed received the Ph.D. degree from the University of Southampton, Southampton, U.K., in 2009. He worked as an Assistant Professor with the National University of Computer and Emerging Sciences (NUCESFAST) Islamabad, Pakistan, from November 2009 to June 2011. He has been a Postdoctoral Fellow with the Computer, Electrical and Mathematical Sciences and Engineering Division, King Abdullah University of Science and Technology, Thuwal, Saudi Arabia, from June 2011 to June 2014. He joined the University of Kent, U.K., as a Lecturer from January 2015 to January 2017. He was a Lecturer, then a Senior Lecturer, and currently a Reader of Electronic Engineering with the School of Computing and Engineering, University of Huddersfield, U.K., in 2017, 2018, and 2020, respectively. His research interests include mainly ultrawide bandwidth systems, millimeter waves, device to device, digital health, and cooperative communications. He is currently a Principal Investigator for Erasmus + Project "Capacity Building for Health Monitoring and Care Systems, DigiHealth-Asia," a Co-Investigator of EU H2020 ETN Research Project "MObility and Training fOR beyond 5G Ecosystems (MOTOR5G)," and EU H2020 RISE Research Project "Research Collaboration and Mobility for Beyond 5G Future Wireless Networks (RECOMBINE)." He is a Fellow of Higher Education Academy (FHEA).



Fahd Ahmed Khan received the B.Sc. degree in electrical engineering from the National University of Sciences and Technology, Pakistan, the master's degree in communications engineering from Chalmers University of Technology, Gothenburg, Sweden, and the Ph.D. degree in electrical engineering from King Abdullah University of Science and Technology (KAUST), Saudi Arabia, in 2007, 2009, and 2013, respectively. He was a Research Fellow with the Institute for Digital Communications, University of Edinburgh, U.K., from November 2013 to November 2014. Currently, he is working as an Assistant Professor at the School of Electrical Engineering and Computer Science in National University of Sciences and Technology, Pakistan. His research interests include cooperative communication systems, multi-antenna communication systems, multiple access techniques, Intelligent reflecting surfaces and signal detection and

estimation. He was the recipient of the Academic Excellence Award from KAUST, in 2010 and 2011, respectively, and was also the recipient of the best poster award at IEEE DySPAN 2012.

Waqas Bin Abbas received the Bachelors and the Masters degree from National University of Computer and Emerging Sciences (NUCES), Islamabad, Pakistan in 2008 and 2012, respectively, and the Ph.D. in Information Engineering from the University of Padova, Italy in 2017. Currently, he is working as an Assistant Professor at NUCES, Islamabad, Pakistan. During Masters, his research was focused in underwater wireless communication, while during Ph.D., his research was mostly focused on energy efficiency in wireless networks. His current research interests include energy efficiency in 5G millimeter wave cellular networks, MIMO communication and multi-hop wireless networks.

Pavlos I. Lazaridis received the B.Sc. degree in Electrical Engineering from the Aristotle University of Thessaloniki, Thessaloniki, Greece, in 1990, the M.Sc. degree in Electronics from Université Pierre and Marie Curie, Paris, France, in 1992, and the Ph.D. degree from École Nationale Supérieure des Télécommunications (ENST) Paris, France, in 1996. From 1991 to 1996, he was involved with research for France Télécom, Paris, France, and teaching at ENST Paris. In 1997, he became the Head of the Antennas and Propagation Laboratory, Télédiffusion de France/France Télécom Research Center (TDF-C2R Metz). From 1998 to 2002, he was a Senior Examiner at the European Patent Ofce (EPO), The Hague, The Netherlands. From 2002 to 2014 he was involved with teaching and research with the ATEI of Thessaloniki, Thessaloniki, Greece, and Brunel University, London, UK. He is currently a Professor of electronics and telecommunications engineering with the University of Huddersfeld, Huddersfeld, UK. He is a member of the Institution of Engineering and Technology (MIET), Senior Member IEEE, Senior Member URSI, a fellow of the Higher Education Academy (FHEA), and he is currently serving as an Associate Editor for IEEE Access.

Figures

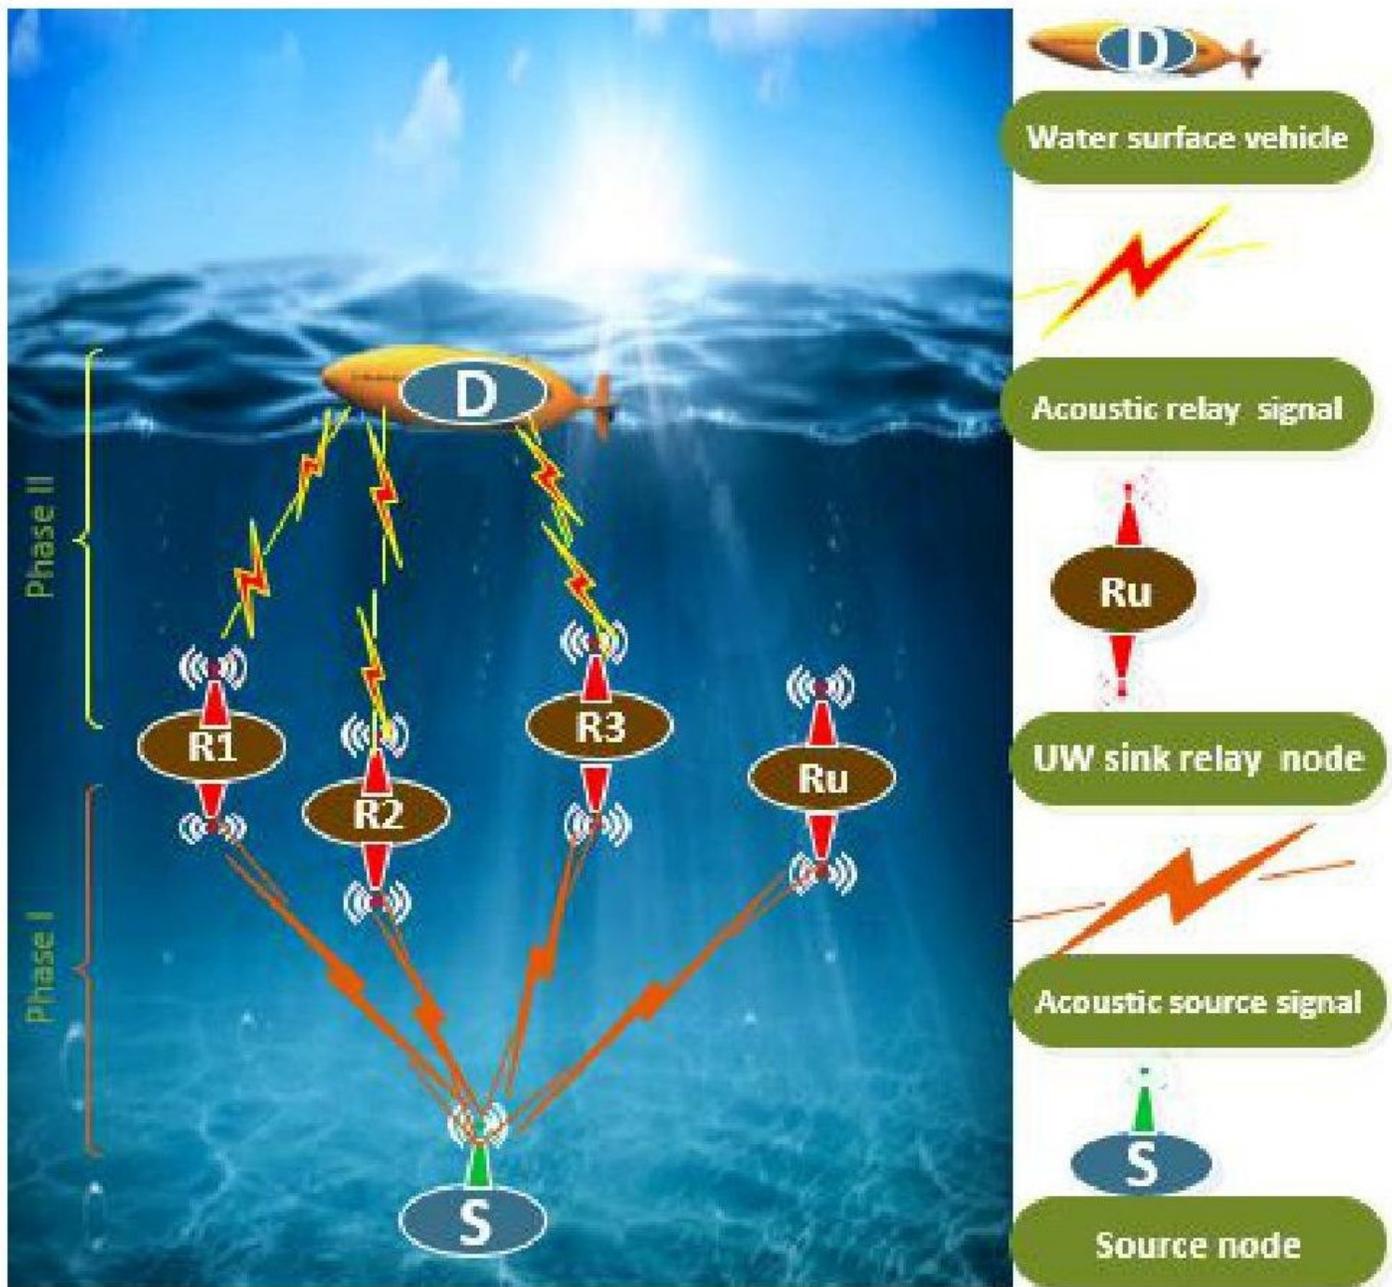


Figure 1

Data acquisition scheme of a underwater cooperative communication system with the assistance of UAF-based sensors.

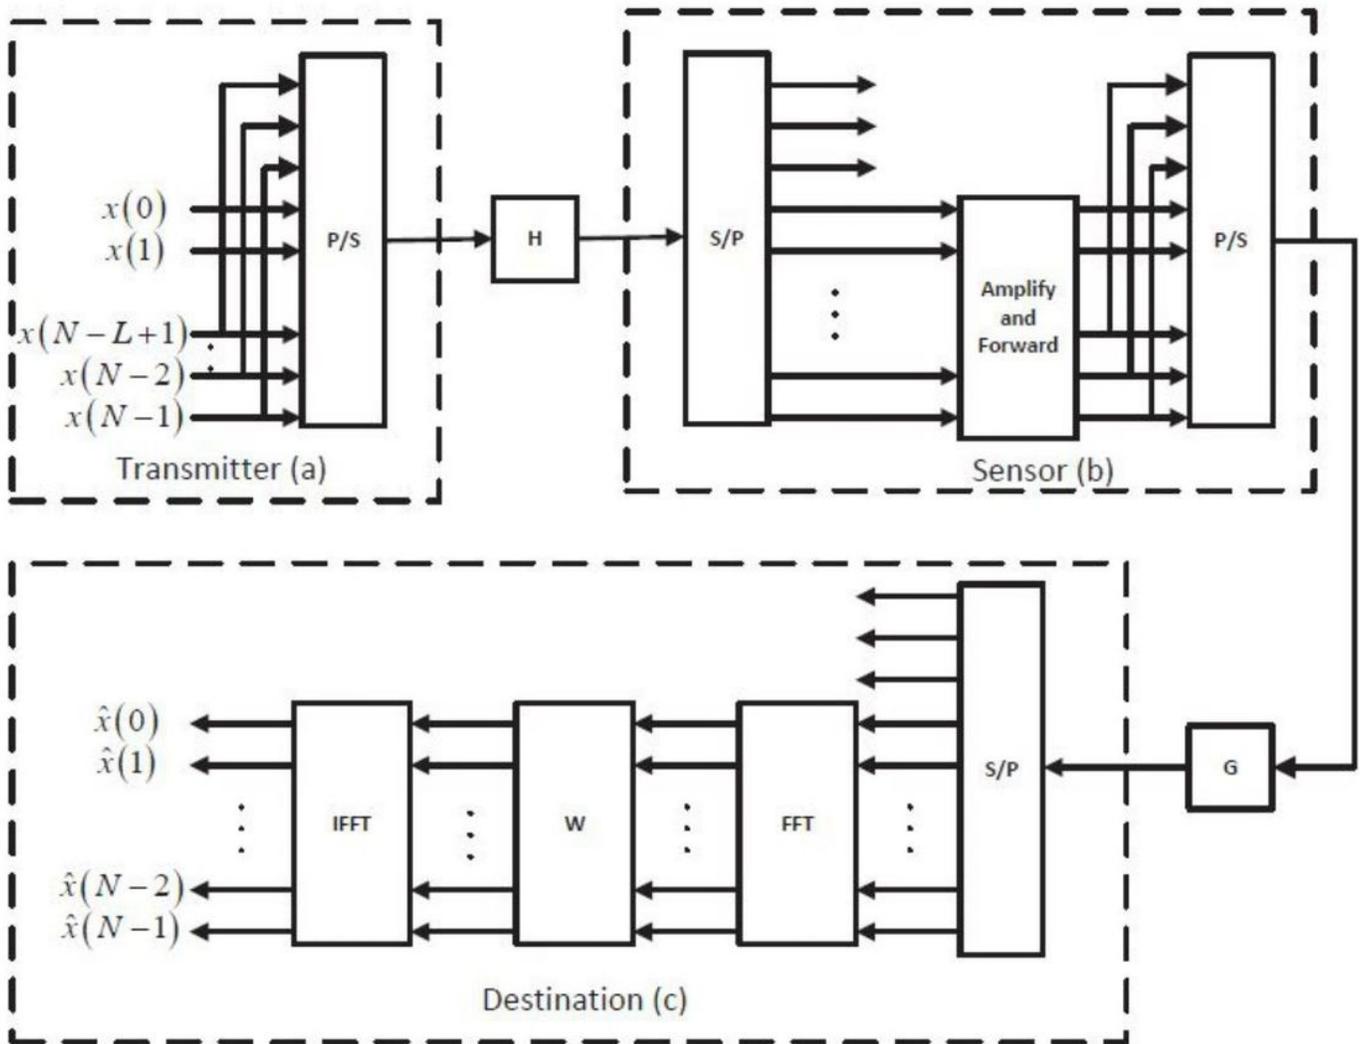


Figure 2

Block diagram of a cooperative communication for IoTs

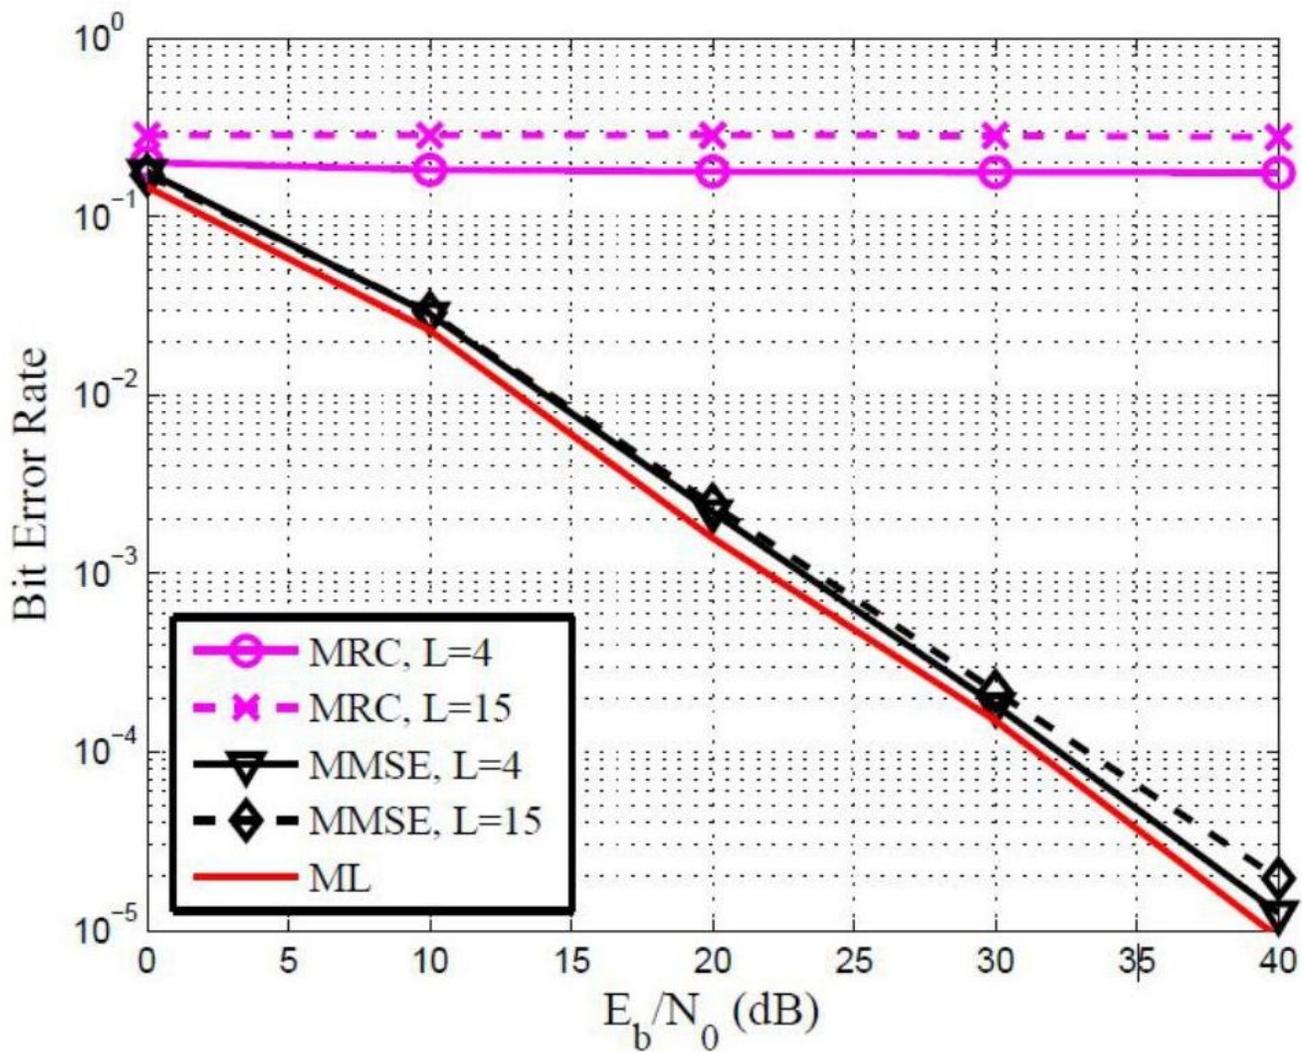


Figure 3

BER versus SNR performance of an AF underwater communication system when using a single relay with different detectors.

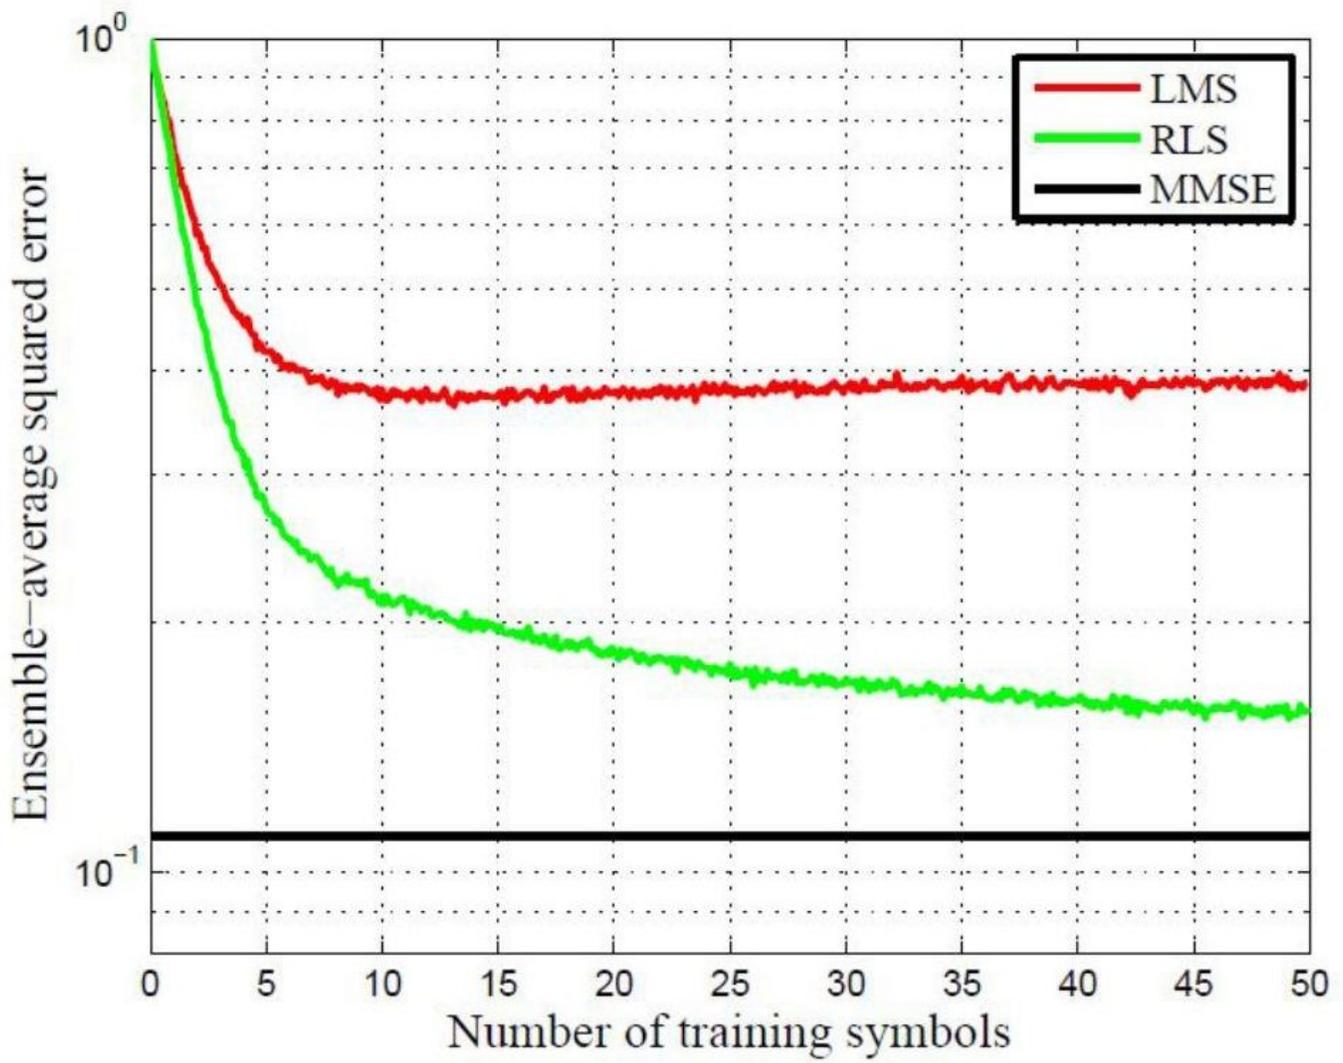


Figure 4

Convergence performance of LMS and RLS adaptive detector for underwater communication system.

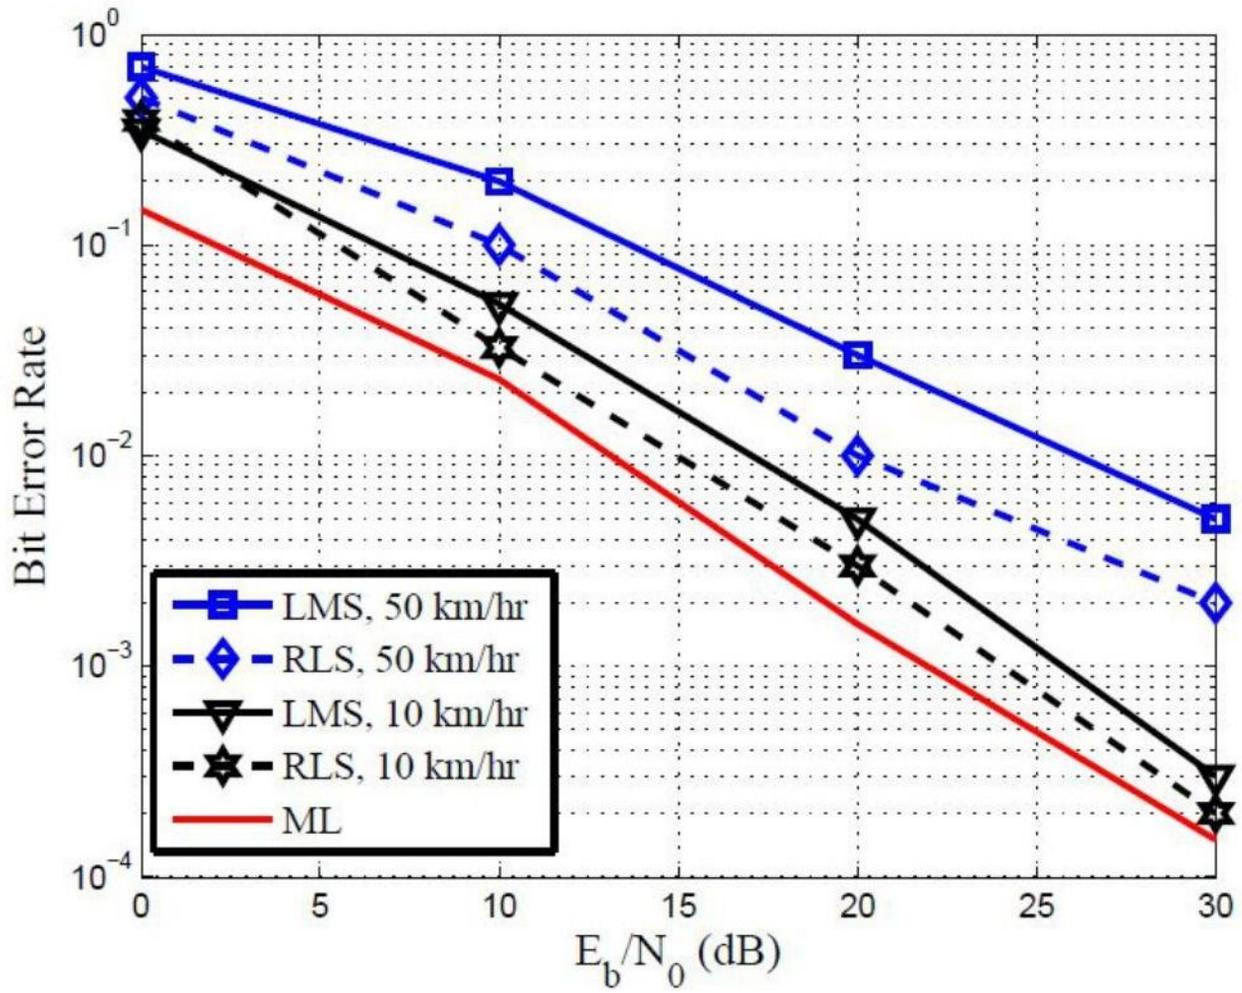


Figure 5

BER versus SNR performance of an AF underwater communication system when using a single relay with different doppler frequency.

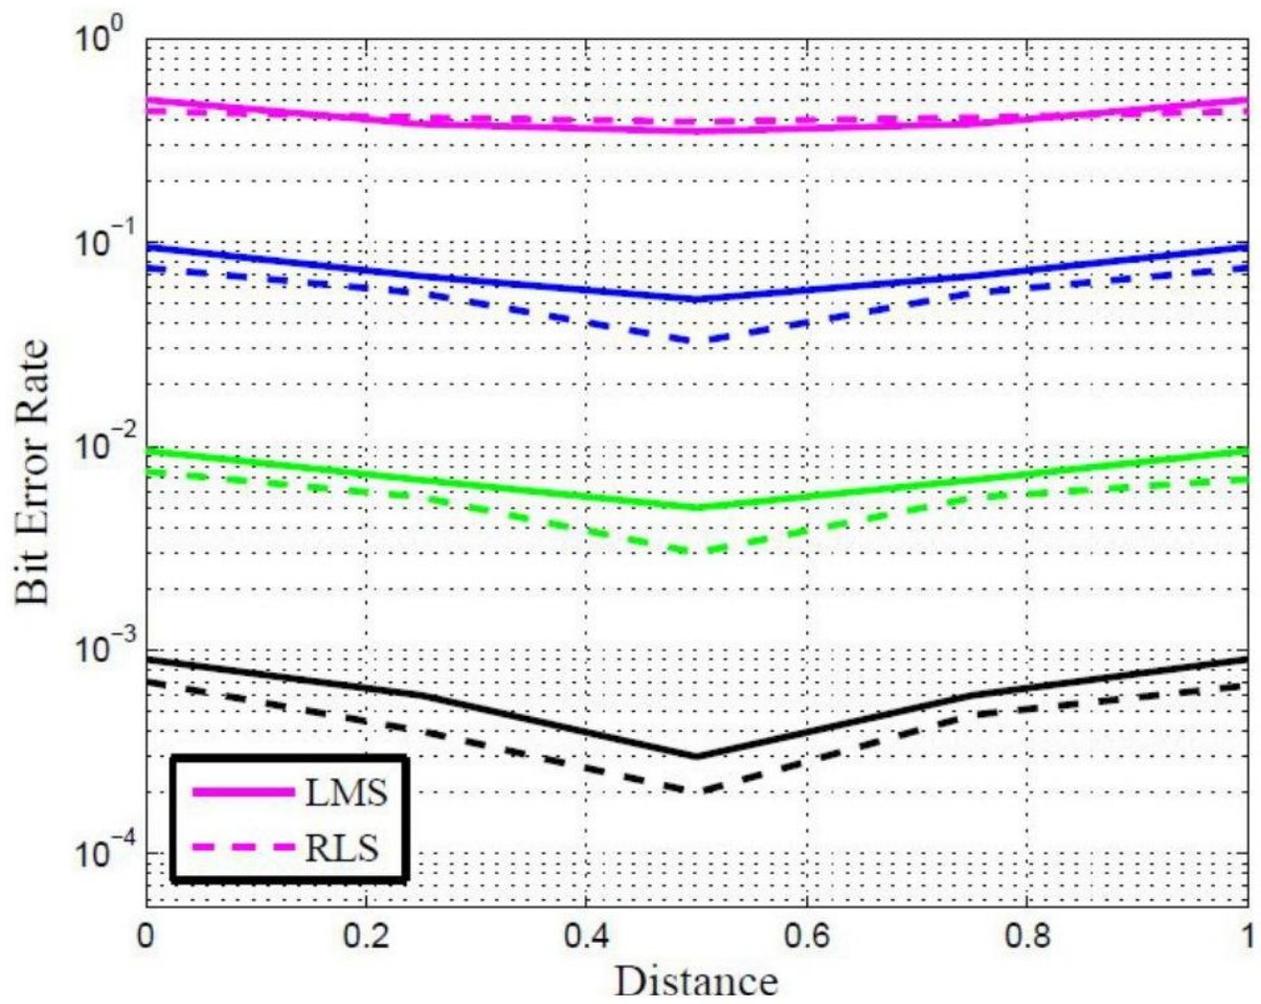


Figure 6

BER of the AF scheme as a function of distance for underwater communication system.

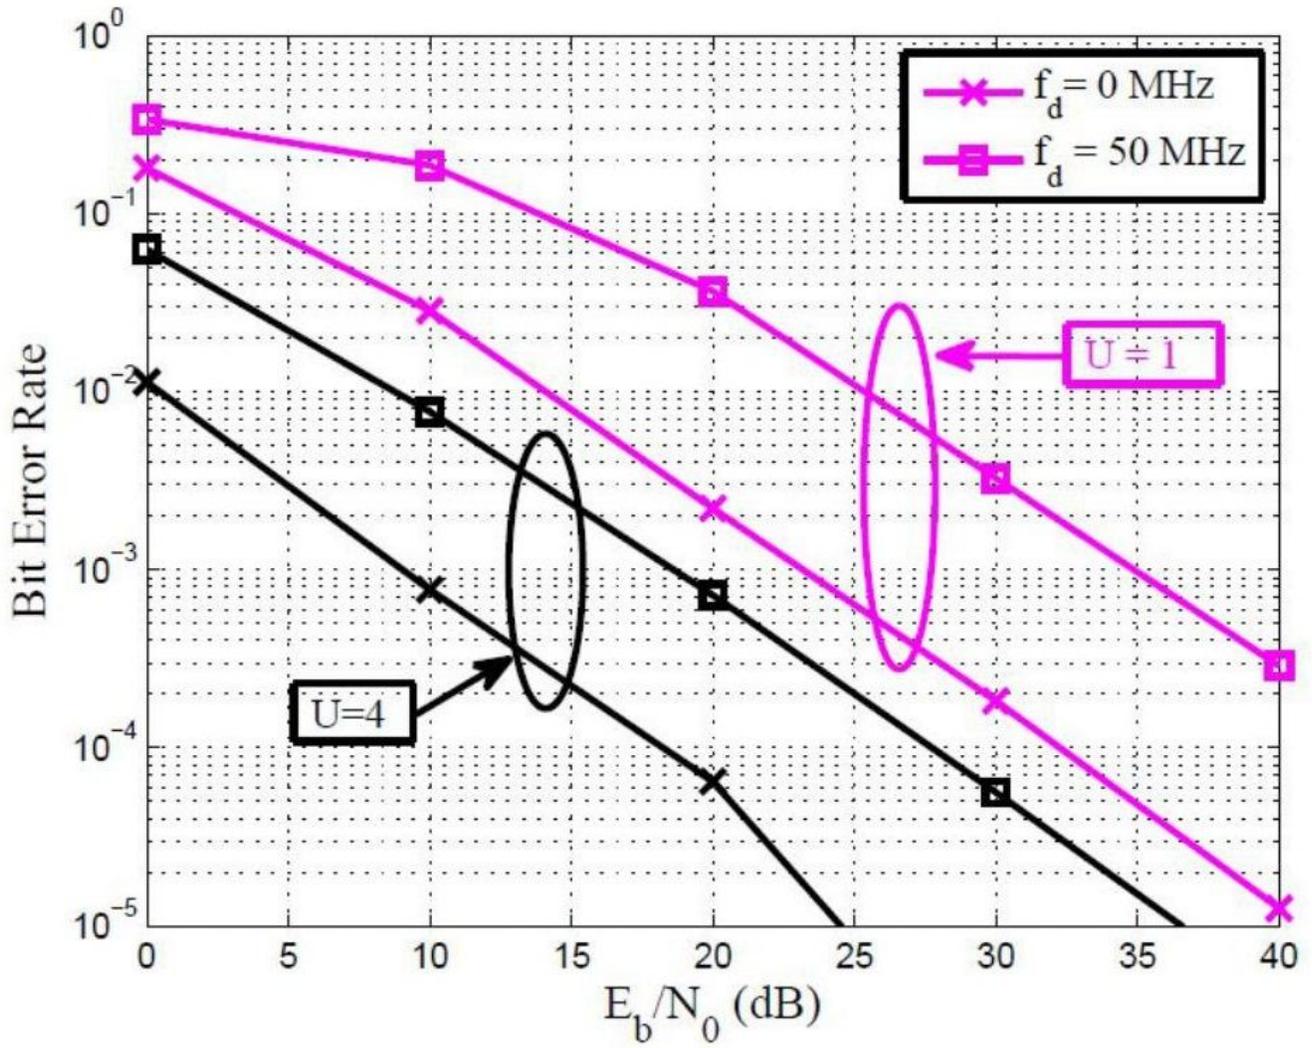


Figure 7

BER versus SNR performance of an AF underwater communication system when using multiple relays with different doppler frequency.