

# An Assessment of Wastewater Inventory and its Energy Potential: Bangladesh Perspective

A K M Khabirul Islam (✉ [khabir5464@yahoo.com](mailto:khabir5464@yahoo.com))

IPE Department

---

## Original article

**Keywords:** Wastewater inventory, energy potential, Anaerobic digestion, microbial fuel cell, micro hydropower plant, microbial electrolysis cell

**Posted Date:** September 2nd, 2020

**DOI:** <https://doi.org/10.21203/rs.3.rs-64059/v1>

**License:**  This work is licensed under a Creative Commons Attribution 4.0 International License.

[Read Full License](#)

---

1 **An Assessment of Wastewater Inventory and its Energy Potential: Bangladesh**  
2 **Perspective**

3 **A K M Khabirul Islam\***, PhD researcher and Instructor Class A, IPE Department, MIST,  
4 **Dhaka, Bangladesh**

5 **Abstract**

6 Background: Everyday considerable amount of wastewater is produced by each one of us.  
7 Developed country produce more wastewater than developing country. But disposing this  
8 wastewater into the environment is an expensive task and need heavy initial investment for  
9 that reason developing country only focus on water supply not on wastewater treatment  
10 considering it's a burden and threatening the human health environment and climate  
11 change. Research shows that wastewater contain considerable amount kinetic and  
12 biochemical energy. But tapping energy from wastewater, proper inventory of national  
13 wastewater including type and characteristics of both industrial and municipal wastewater is  
14 essential which is presently absent in Bangladesh. In this paper, efforts have been taken  
15 firstly to estimate yearly total domestic as well as industrial wastewater production in  
16 Bangladesh based on reliable secondary data and monthly per capita income. Secondly,  
17 common, and emerging energy recovery technologies ideal for tapping energy from  
18 wastewater have been reviewed systematically and identified which are anaerobic  
19 digestion (AD) micro hydro powerplant (MHP), microbial electrolysis cell (MEC) and  
20 microbial fuel cell (MFC). Finally, energy potential has been estimated basing on previous  
21 research outputs and with empirical formula. At the end barrier and overcoming strategy with  
22 important recommendation has been proposed for researchers and decision makers.

23 Results: Estimated yearly domestic and industrial wastewater is 4.874 billion and 0.452  
24 billion tons respectively. For energy estimation,10%-50% total wastewater has been  
25 considered. Calculation shows that, 10% wastewater can produce 2.41, 1829.09 and 1.97  
26 GW energy yearly through AD, MHP, MEC and MFC technologies, respectively whereas  
27 50% total wastewater can generate 9145.94 GW energy yearly by MHP only.

1

2 Conclusion: Estimated quantity of produced wastewater and energy potentials from  
3 wastewater is based on secondary data. For more reliable estimation feasibility study may  
4 be conducted by the researchers supported by stakeholders. Both wastewater producers  
5 and treatment plant owners should have noble desire backed by governmental  
6 organizations will facilitate the process. Outcomes are very significant and optimistic and it  
7 is expected that this findings not only inspired researcher, wastewater operators and policy  
8 makers of Bangladesh but also other developing countries around the globe.

9 **Keywords.** Wastewater inventory, energy potential, Anaerobic digestion, microbial fuel cell,  
10 micro hydropower plant, microbial electrolysis cell.

---

11 \*Correspondence to [khabir5464@yahoo.com](mailto:khabir5464@yahoo.com)


12

## 13 **1. Introduction**

14 Worldwide water demand is increasing but water availability is reducing whereas  
15 greenhouse gas emission is also escalating with the increase of population growth and  
16 industrialization. As per United Nation wastewater development report (UNWDR) 2017  
17 around 3857.3 trillion tonnes of freshwater are extracted and approximately 44% of this  
18 water is used up by agriculture sector through irrigation and evaporation. Rest, 56% is  
19 discharged into the environment as wastewater whereas 628 trillion tonnes as industrial and  
20 314 trillion tonnes as municipal wastewater(UNESCO, 2017). Among this discharged  
21 wastewater, apparently 80% are not treated properly or not treated at all which generate  
22 greenhouse gas emission. Bangladesh is a south Asian developing densely populated  
23 country where around 16.5 million people living (Bangladesh Bureau of Statistics, 2018).  
24 Per capita per monthly average income varies from various cluster of people which is around  
25 50 USD (HIES, 2016). As per Asian development report middle income group of people is  
26 around 3.7 million and their per capita monthly income also 300 USD (Bank, 2010). All the

1 citizen does not have access to electricity only 75.92 % population has the access to  
2 electricity only and water hygiene and sanitation (WASH) though the installed capacity is  
3 19570 MW and daily electricity production is an around 10264 MW. Out of this produced  
4 electricity renewable source is only 0.19% solar, 1.18% is hydropower and rest from fossil  
5 fuel based primary fuel( figure 1) which contribute to greenhouse gas emission (Board,  
6 2018). In US nationwide, water and wastewater treatment plants needed around 3 to 4% of  
7 total electricity utilization. This energy consumption is in similar range for other developed  
8 countries (Gude, 2015).Other estimate accounts that energy costs varies from 5% to 30% of  
9 the total operating costs of water and wastewater utilities worldwide(Chae and Kang, 2013).  
10 Most of the developed countries maintain the statistics of total water and wastewater  
11 production, treatment and standard for safe discharge as well monitor the total water cycle  
12 for enforcing the regulation. In case of developing country picture is totally different as do not  
13 maintain any comprehensive record of water management cycle particularly wastewater  
14 production. Some of the country do keep record of water supply but partially or even no  
15 record of wastewater production and treatment. As per UN record Bangladesh only treat 2%  
16 of wastewater and rest of the wastewater directly goes to the environment without proper  
17 treatment(UNESCO, 2017). In Bangladesh, as wastewater treatment considered as energy  
18 intensive process and initial investment is more believing that wastewater treatment does not  
19 provide any visible output that's why both wastewater producers are not interested to invest  
20 money on this sector though developed country and few developing countries are serious  
21 about the environment and greenhouse emission issue and committed to treat their  
22 wastewater before discharging to waterbody. They view wastewater as a carrier of energy  
23 not a burden and optimise the energy balance of WWTPs to the point of energy self-  
24 sufficiency or even further to be "energy-positive" (Kollmann et al., 2017).To turn this sector  
25 as an energy producer, worldwide extensive research is going on and recent results found  
26 that wastewater contain around 5- 10 times more energy than its energy requirement to treat  
27 it (Heidrich et al., 2011),(Dai et al., 2019). Wastewater contain organic and inorganic  
28 substance in terms of Biochemical oxygen demand (BOD) and chemical oxygen demand

1 (COD) as well as various type of microorganism. Some of these microorganism breakdowns  
2 the organic matters and capable of producing energy. Wastewater contain not only energy in  
3 the form of COD/BOD but also flowing wastewater either influent or effluent having a  
4 reasonable head is a great source of hydropower. Biological wastewater treatment  
5 technologies can produce 40-55% of the WWTP's energy needs whereas advanced and top  
6 rated wastewater treatment process can produce up to 80% of a WWTP's electricity  
7 requirements as well become energy positive by feeding electricity back into the grid, for  
8 example, in a sludge-to-energy plant in Hong Kong (Never, 2016). Though it is established  
9 that wastewater contain significant amount of energy, but extraction of energy needs  
10 appropriate technologies. Few common technologies like AD, MHP already implemented  
11 and producing energy form the wastewater treatment plant (WWTP) in the some part of the  
12 world particularly in the developed countries(Strazzabosco et al., 2020),(Bousquet et al.,  
13 2017).

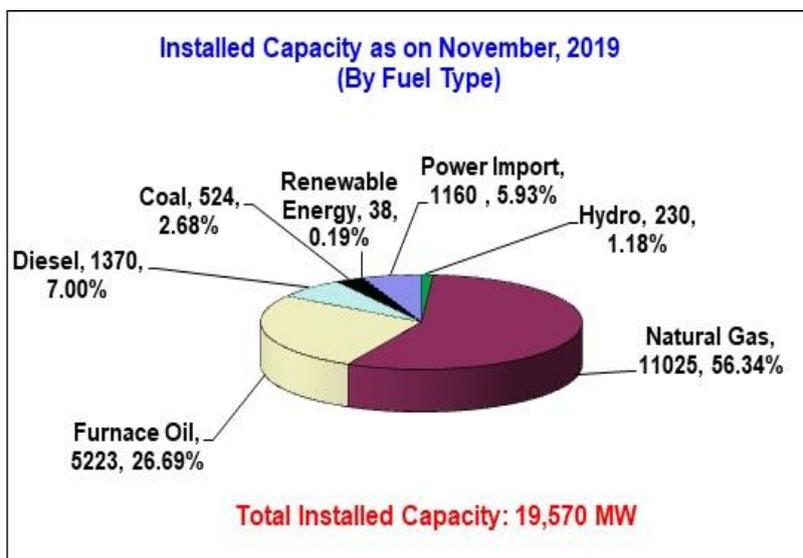

14  
15 Fig 1. Total energy generation based on primary fuel and Renewable energy source.  
16 Few other emerging technologies like photocatalysis, photo fermentation Microbial photo  
17 electrochemical system( MPEC) and MEC/MFC) are promising technologies and extensive  
18 research is in place presently but technology readiness level(TRL) still within 1-7 (Lin et al.,  
19 2018),(Demir et al., 2019),(Jafary et al., 2019),(Aiken et al., 2019).Out of these technologies


1 MFC and MEC are most emerging technology as energy generation and simultaneous  
2 wastewater treatment is possible. (Cusick et al., 2011),(Tartakovsky et al., 2011). For better  
3 understanding and well structuring of the entire study, it has been divided into 6 section. 1<sup>st</sup>  
4 section is introduction followed by common and emerging technology for tapping energy  
5 from wastewater which is describe in 2<sup>nd</sup> section. 3<sup>rd</sup> and 4<sup>th</sup> sections are most important  
6 and deals with total estimated wastewater production and energy production potential from  
7 generated wastewater respectively. 5<sup>th</sup> and 6<sup>th</sup> section discuss about the barrier and  
8 overcoming strategy as well recommendation and final section determine takeaway and  
9 concluding remarks of this study.

## 10 **2. Potential technologies for tapping energy from wastewater**

### 11 **2.1 Common technologies**

#### 12 **2.1.1 Hydropower generation from wastewater**

13 Energy generation from wastewater through hydropower plant scheme is shown as a viable  
14 option to attain sustainability if flow rate and considerable of head is available as flow is  
15 constant although periodic fluctuation may experience. But Due to very nature, type, quality,  
16 quantity and gross head at inlet or outlet of the WWTP, implementation is limited compare to  
17 other hydropower generation project. The main limitation of this scheme to implement at  
18 WWTP is that it requires the influent/effluent to have enough kinetic energy to justify the  
19 venture. Hence, either the head or the flow rate must be substantial(Mo and Zhang, 2013)  
20 Hydro power production from wastewater utilities shows numerous merits like  
21 environmentally friendly, can be installed at the existing.

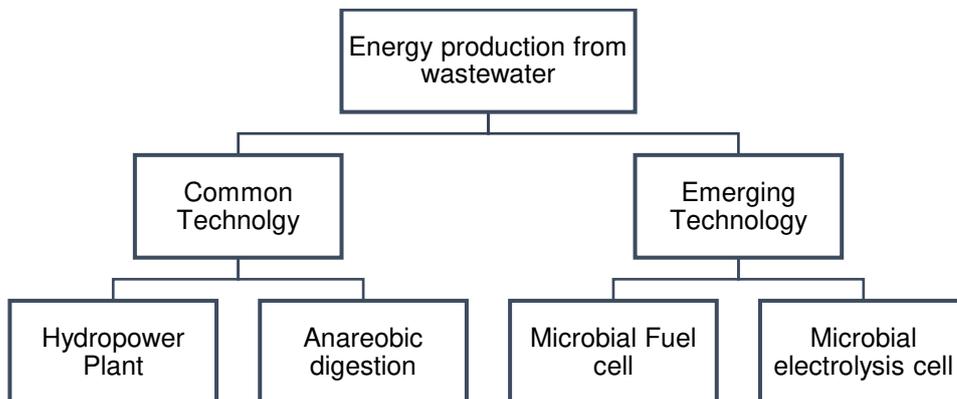

22

1 Fig 2. Energy production technologies suitable for wastewater

2 infrastructure that lessen the construction works, no need of water diversion system, can be  
3 adjusted to the load curve of WWTP energy consumption pattern, no need of separate  
4 transmission and distribution network. Water quality also will be improved due to the rise of  
5 dissolved oxygen intensities on the WWTP outlet (Bousquet et al., 2017). To assess  
6 hydropower potential sites, energy generation potential and economic profitability evaluation  
7 is needed based on technical and financial parameters. Technical parameters are influent  
8 and effluent flow rate for flow duration curve, upper and lower elevations for approximate  
9 gross head, type of hydro turbine and generator, control measure, power transmission and  
10 distribution arrangement. On the other hand, financial parameters include, cost related to  
11 feasibility study, engineering, design and development cost, CAPEX, OPEX. Typical  
12 hydropower generation having a flow rate and gross head of WWTP at the upstream or  
13 downstream can be calculated using Equation 1

14  $P = \eta \rho g Q H$ ------(1)

15 Where P is power (kW),  $\eta$  is the efficiency of the turbine (unitless),  $\rho$  is the density of the  
16 water ( $\text{kg/m}^3$ ) g is the acceleration due to gravity ( $\text{m/s}^2$ ) Q is the flow of water through the  
17 turbine ( $\text{m}^3/\text{s}$ ) H is the head (m). WWTPs located at the plane land not having reasonable  
18 head, "Run-of-river" system may be considered which is an alternative promising option as  
19 dams and separate reservoir is not required but constant water supply is required. When  
20 Water flows through pipe or channel to turbine, it converts kinetic energy of flowing water  
21 and drives the electrical generator. The available energy therefore depends on the quantity  
22 of water flowing through the turbine and the square of its velocity. Hydropower potential of a  
23 run of river scheme is shown at equation 2.

24  $P = \frac{1}{2} \eta \rho Q V^2$ ------(2)

25 where V is the velocity of the water flow and Q is the volume of water flowing through the  
26 turbine per second,  $\eta$  is the efficiency of the turbine (unitless) and  $\rho$  is the density of the  
27 water ( $\text{kg/m}^3$ ). LucidPipe™ is an inline spherical turbine that can be installed directly in the

1 primary channel of a pressurized system. A wide range of pipe sizes (0.61–1.52 m) and with  
 2 minimum flow of 1–5.6 m<sup>3</sup>/s, it can generate about 18–100 kW per unit. The system is  
 3 already ANSI Standard and tested, certified by NSF International and approved for using in  
 4 potable water systems as well as agricultural, industrial, and wastewater pipeline systems  
 5 (Sari et al., 2018). Hazen-Williams Equation and Manning's equation can be used to  
 6 calculate cross-sectional average velocity flow of pipe and open channel respectively. Figure  
 7 4 shows the process of calculating slope to calculate flow velocity of the wastewater

8  $V = k C (D/4)^{0.63} S^{0.54}$  -----(3) [Hazen-Williams Equation]

9 where  $S = a / b$ -----(4)

10 and  $Q = V \pi D^2 / 4$ -----(5)

11 V= Velocity of liquid, (m/s)

12 D= Pipe inside dia(m)

13 Q= Discharge rate (m<sup>3</sup>/s)

14 S= Energy slope(m/m)

15 b=Length of the pipe (m)

16 a= head loss(m)

17 k is a unit conversion factor and value is 1.318 for(feet and seconds) and 0.85 for SI units  
 18 (meters and seconds). C is a Hazen-Williams Coefficient and value varies (within 100-150)

19  $V = (k_n / n) R_h^{2/3} S^{1/2}$ -----(6) [Manning's equation]

20 Where

21  $R_h = A / P_w$  -----(7)

22 V = cross-sectional mean velocity ( m/s)

23  $k_n = 1.486$  for English units and  $k_n = 1.0$  for SI units


24 n = Manning coefficient of roughness - ranging from 0.01 (a clean and smooth channel) to  
 25 0.06 (a channel with stones and debris, 1/3 of vegetation)

26  $R_h =$  hydraulic radius ( m)

27 S = slope/gradient - of channel (m/m)

1  $A$  = cross sectional area of flow ( m

2  $P_w$  = wetted perimeter ( m)

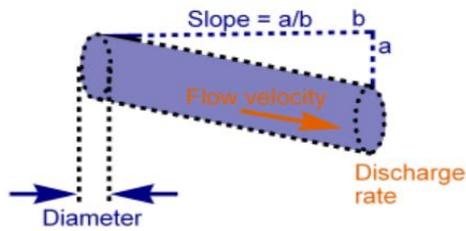


3

4 Fig 3. Pipe/channel slope and velocity relation of flowing water.


5 Mostly, two hydropower generation system may be installed at WWTP which has been  
6 shown at the following fig 4(a) and 4(b). In first case, hydro plant may be installed at the  
7 upstream where turbine should be more corrosion resistant, and the diversion pipe entrance  
8 must be equipped with a trash rack to control debris. For second case hydro system should  
9 be installed at the downstream, turbine face cleaner water and corrosion is not much  
10 influence on turbine. It can be noted that both possibilities can be technically implemented.  
11 In Jordan, Samara project is a best example where upstream and downstream hydropower  
12 scheme has been implemented and generating 12.5 Gwh/y and 8.6 gwh/y respectively  
13 (Esha, 2005). Delhi Jal board( DJB) of India commissioned a hydropower plant at the  
14 downstream of WWTP located at east Delhi, whose capacity is 9 million gallon per  
15 day(MGD). Effluent falls from 4.5 m above the level of water receiving stream and expected  
16 to generating around 2000 kWh electricity annually(Hydroreview, 2015) DB Patil et al.  
17 (PATEL and JARDOSH, 2018) studied feasibility of implementing hydroelectric turbine  
18 systems in WWTPs in India. On the basis of study they found that Hydroelectric turbine at  
19 the cluster of textile industries Central effluent treatment plant(CETP) located at Moharasta  
20 that would generate 26 kW that can be used at the plant itself at an average flow of 0.65 m<sup>3</sup>  
21 /s. Table 2, shows few examples of installed hydropower plants at WWTPs across the  
22 world.

23

1

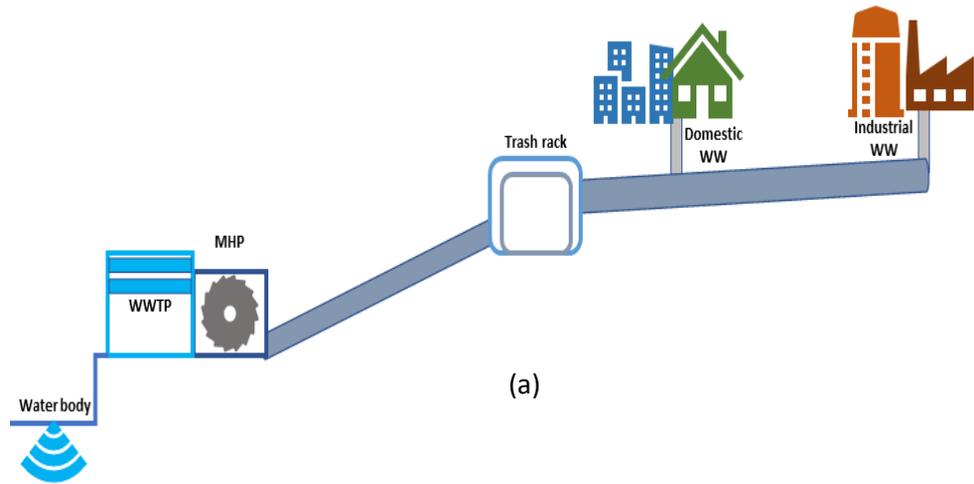

2

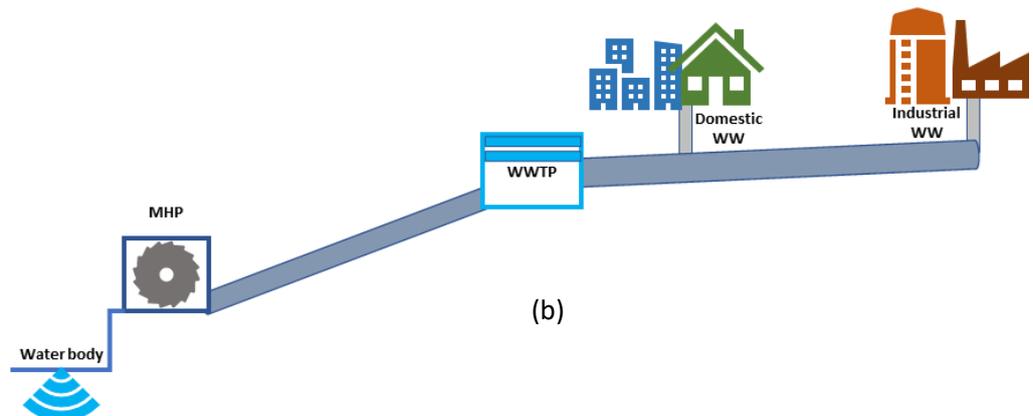

3

4

Fig. 4 (a) Downstream Effluent Micro hydropower plant (DE-MHP) (b) Upstream influent hydropower plant (Modified from C. Bousquet et al. 2017)

5

6

Table. 2: Installed hydropower capacity at some actual WWTPs worldwide (C. Bousquet et al. 2017).

7

Name, Location, Country	Type of Operation	Turbine used	Head (m)	Design Flow rate (m <sup>3</sup> /s)	Installed power(Kw)	Reference
Aire, Geneva, Switzerland	DTE	Kaplan	5	3.2	200	
As Samra, Jorda	USW	2 Pelton	104	3.2	2x 800	

n						
As Samra, Jordan	DTE	2 Francis	41	3.2	2x 840	
Deer Island, Boston , USA	DTE	2 Kaplan	8.8	13.1	2x1000	
Pont Loma, San diego, USA	DTE	Francis	27	7.6	1350	
Elsholt, UK	USW	2 Archime des screw	n/a	2.6	2x90	
Emmerich, Germany	DTE	Archime des screw	3.8	0.4	13	
La Asse, Nayon, Switzerland	DTE	Pump as turbine	94.25	0.293	220	
Engelberg, Switzerland	DTE	Pelton	54.4	0.16	50	
Grachen, Switzerland	DTE	Pelton	365	0.09	262	
La Douve 1, Leysin, Switzerland	DTE	Pelton	545	0.08	430	

La Douve 2, Leysin, Switzerland	DTE	Pelton	83	0.108	75	
Morgental, St Gallen, Switzerland	DTE	Pelton	190	0.84	1350	
Profy, Le Chable, Switzerland	USW	Pelton	449	0.1	350	
North Head, Sydney, Australia	DTE	Kaplan	60	3.5	4500	
Hsinchu, taiwan	DTE	n/a	n/a	n/a	11	
Taichung, Taiwan	DTE	n/a	n/a	n/a	68	

1

## 2 2.1.2 Biogas production from wastewater

3 Both municipal and industrial wastewater treatment plant produce huge amount of sludge  
4 produced from gravitational sedimentation in the primary settler and secondary settler. Small  
5 WWTP produce less amount of sludge and extended aeration is a good option to neutralize  
6 the sludge before disposal. On the other hand large amount of sludge generated from big  
7 WWTPs or CETP that can be utilized to generate biogas by AD (Martínez et al., 2019)(fig 5).  
8 Study shows that sludge production rate from WWTP is estimated as 0.04 kg dry matter per  
9 capita per day (Karagiannidis et al., 2011). AD is a complex process where the conversion of  
10 organic matter takes place by means of microorganisms in the absence of oxygen. The  
11 breakdown of organic matter can take place in stages namely, hydrolysis, acidogenesis,

1 acetogenesis and methanogenesis. Biogas production occur at last stage and significantly  
 2 dependent on structure of the microbial communities' present in the reactor and operating  
 3 conditions applied (Karagiannidis et al., 2011). Under optimum digestion conditions, a  
 4 methane yield of 315 – 400m<sup>3</sup>/ton organic dry matter (ODM) can be expected (Bachmann,  
 5 2015). The most conventional approach to guesstimate biogas generation potential is using  
 6 fixed biogas yields (Guide to Biogas From production to use, 2010),(Rao et al., 2010). To  
 7 estimate biogas production potential from wastewater based on VSS, following empirical  
 8 formula can be used (Equation 8).


9  $V_{bg} = m_{vs} \times Y_{bg}$ ------(8)

10 where:  $V_{bg}$  is the estimated biogas production rate associated with wastewater(m<sup>3</sup>  
 11 biogas/day);  $m_{vs}$  is the mass flow rate of volatile solids contained in wastewater (kg volatile  
 12 solid/day);  $Y_{bg}$  is the biogas yield of feed material (m<sup>3</sup> biogas/kg volatile solid) which is  
 13 approximately 0.406 m<sup>3</sup> /kg VSS (Peu et al., 2012). According to (McCarty, 1964), (McCarty,  
 14 1964) and based on wastewater COD , biogas/CH<sub>4</sub> production potential can be calculated as  
 15 per the following equation( 9) and (10).

16  $CH_4(m^3/hr) = 0.4 \times (S_0 - S_e) \times Q$ ------(9)

17  $S_e = (1 - \eta) \times S_0 / 100$ ------(10)

18 Where,  $S_0$  and  $S_e$  indicate influent and effluent COD in mg/l respectively;  $\eta$  is COD removal  
 19 efficiency;  $Q$  indicate wastewater discharge rate in m<sup>3</sup>/hr

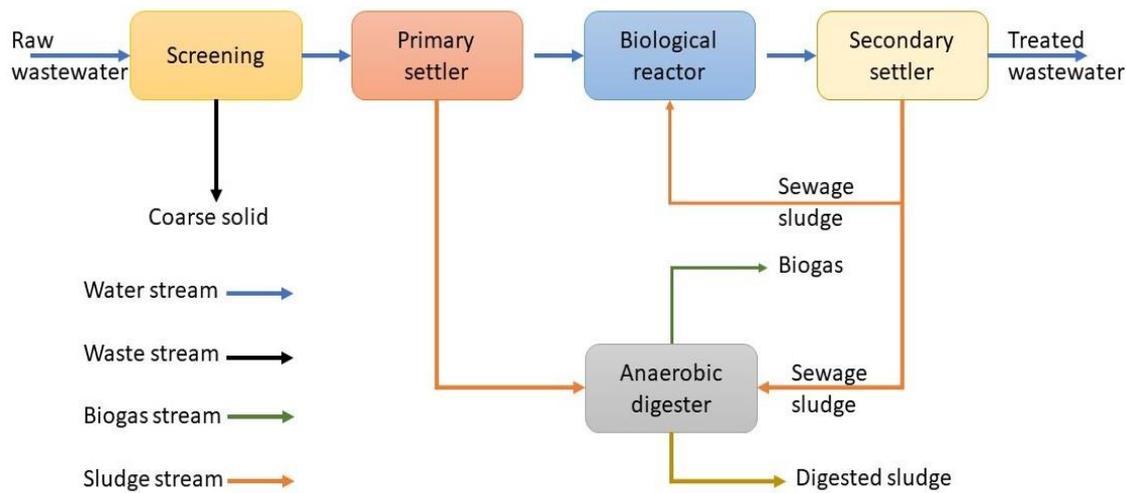

1

2 Fig 5. Schematic Illustration of biogas production from wastewater

3 According to international water association (IWA) wastewater report 2018, India  
 4 commissioned six Sewage Treatment Plants (STPs) with a total capacity of 378 MLD.  
 5 Biogas from these plants powers the majority of the STP's electricity demand and reduce  
 6 77% electricity dependence of the STPs on national grid (Shan et al., 2016). Another report  
 7 about India's wastewater and solid integration plan state that waste-to-energy plant will use  
 8 both 10-15 tons of solid waste and around 10-20 tons of wastewater and expected to  
 9 produce 21000 m<sup>3</sup> of biogas daily (Never, 2016). In USA, the threshold plant size is 23 MLD  
 10 (EPA, 2011), the smallest WWTP equipped with a cogeneration engine was 17  
 11 MLD (Strazzabosco et al., 2020). Besides most of the developed countries are producing  
 12 significant amount of biogas from wastewater. Table 3 shows the country wide biogas  
 13 production.

14 Table 3 Biogas production from WWTPs of selective countries (Bachmann, 2015)

Name of country	Reference year	Biogas generation from WWTP	
		GWh/y	% of total biogas production
Brazil	2014	42	7
Denmark	2012	250	21
Finland	2013	126	22
France	2012	97	8

Germany	2014	3050	7
Norway	2010	164	33
South Korea	2013	969	38
Sweden	2013	672	40
Switzerland	2012	550	49
Netherlands	2013	771	20
United Kingdom	2013	761	11

1

## 2 **2.2 Emerging Technologies**

### 3 **2.2.1 MFC**

4 Microbial fuel cell (MFC) is an emerging and promising technology to produce electricity  
5 catalysing the microbes present in the waste stream simultaneously this technology also  
6 carryout wastewater treatment. MFC is like a battery cell having an anode which need to  
7 anaerobic, but cathode must be in contact with air and separate by an ion passable  
8 membrane (optional).Anode and cathode should be connected to some load to complete  
9 the circuit and wastewater as electrolyte allows to flow through the cell. Microbes available  
10 in wastewater will form biofilm over the anode surface, breakdown the organic matters and  
11 produce electron and proton ion are produced at anode and cathode as per the following  
12 formula respectively

13 [ Eq (12 )and (13 )] where organic matter in wastewater is represented as Glucose  
14 ( $C_6H_{12}O_6$ ).

15 The theoretical cell voltage of the overall reaction (the difference between the anode and  
16 cathode potential) determines if the system is capable of electricity generation [Eq (11)].  
17 Practically power potential is less due to various loss. At ambient temperatures, MFCs may  
18 produce upto  $1.8kWh/ m^3$  from a treated effluent (Hua et al., 2019),(Ge et al., 2013).It is  
19 estimated that in USA around 1960 MW of electricity can be produced from the dairy

1 industrial wastewater (Borole and Hamilton, 2010). Electricity production from both municipal  
 2 and various type of industrial wastewater are shown at table 4.


3  $E_{cell} = E_{cathode} - E_{anode}$  -----(11)



5  $E_{anode} = -0.429$  Volt vs SHE



7  $E_{cathode} = 1.235$  Volt vs SHE

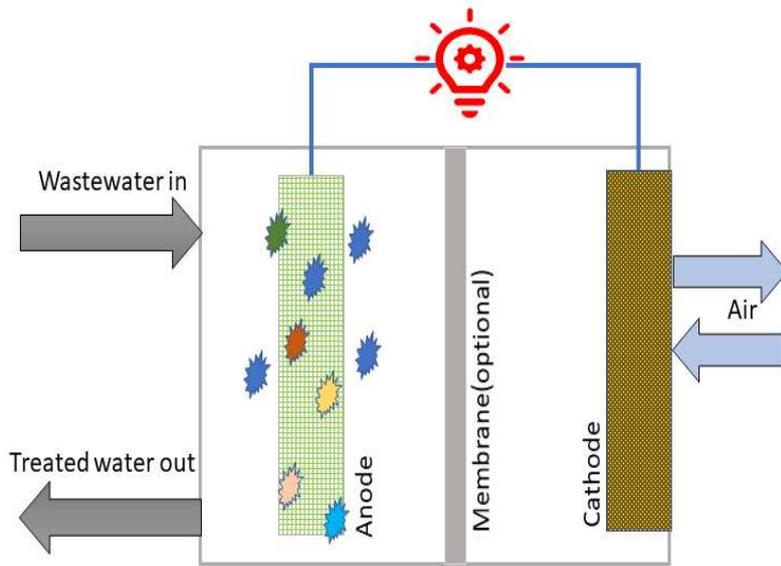

8

9 Figure 6 Schematic diagram of MFC

10 Table 4. Energy recovery from various wastewater substrates in MFCs

Type of MFC	Type of wastewater	Energy production rate (mW/m <sup>2</sup> )	COD Removal rate (%)	Reference
Two chamber MFC	Municipal	25	30	(Rodrigo et al., 2007)
Single chamber	Domestic	-	65	(Pepé Sciarria et al., 2013)


MFC				
Single chamber MFC	Agricultural	45	86	(Min et al., 2005)
Two chamber MFC	Agriculture	-	88	(Gude, 2018)
Single chamber MFC	Dairy	20 W/m <sup>3</sup>	91	(Mahdi Mardanpour et al., 2012)
Single Chamber MFC	Pharmaceutical	177.3 W/m <sup>3</sup>	-	(Gude, 2016)
Single chamber MFC	Hospital	14 W/m <sup>3</sup>	-	(Gude, 2016)
Single chamber MFC	Dairy	5.7 W/m <sup>3</sup>		(Gude, 2016)
Double chamber MFC	Effluent from AD	42 W/m <sup>3</sup>	-	(Gude, 2016)
Single chamber MFC	Domestic	3.7 W/m <sup>3</sup>	-	(Gude, 2016)
Double chamber	Distillery	63.1		(Gude, 2016)

MFC				
-----	--	--	--	--

1

2 **2.2.2 MEC**

3 An MEC is a form of MFC where both anode and cathode are anaerobic and have a  
 4 membrane in between is optional. Unlike MFC instead of produce electricity, in the cathode  
 5 chamber, e<sup>-</sup> and H<sup>+</sup> ions are combined to generate H<sub>2</sub> gas. However, H<sub>2</sub> formation at  
 6 cathode chamber is not spontaneous i.e. it requires an external bias. A small amount of  
 7 electricity (with acetate this is in theory 0.114 V, in practice <0.25 V shown in Eq (14)), is  
 8 required to generate the H<sub>2</sub> gas (Call and Logan, 2008). This is substantially less energy  
 9 than is required to produce H<sub>2</sub> through water electrolysis, typically 1.8-2.0 V (Lu and Ren,  
 10 2016). A schematic of an MEC is shown in Fig 7. When wastewater act as electrolyte and  
 11 flow to the anode chamber and be in contact with anode surface, microbes of wastewater  
 12 form a biofilm and colonizing anode surface. The metabolic activity of the biofilm, electrons  
 13 and protons are freed, and electrons are transferred to the anode (as final electron acceptor)  
 14 and proton pass subsequently to the cathode via an external circuit. At the cathode, which  
 15 plays the role of an electron donor, the reduction of H<sup>+</sup> to molecular H<sub>2</sub> gas takes place.  
 16 Anode and cathode reactions are shown at the [Eq (15),(16) and (17)].

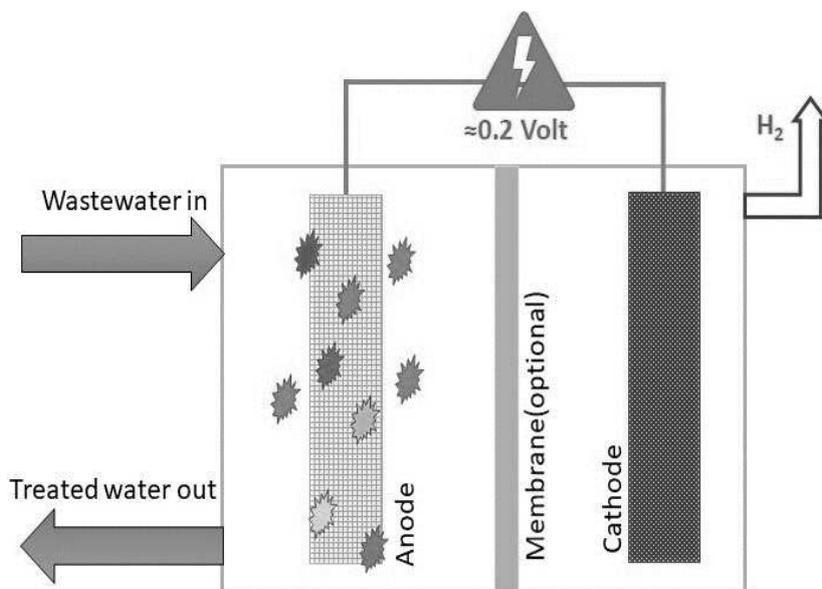


17

18


Figure 7 Schematic diagram of MEC

1  $E_{\text{cell}}=E_{\text{cathode}}-E_{\text{anode}} \text{-----}(14)$

2  $=-0.14 \text{ Volt vs SHE}$



5  $E_{\text{anode}}=-0.279 \text{ Volt vs SHE}$



7  $E_{\text{cathode}}=-0.414 \text{ Volt vs SHE}$

8

9 As wastewater contain organic and inorganic substance strength is indicated by COD so H<sub>2</sub>

10 yield production rate based on COD can be evaluated by the following equations [ Eq (18)

11 and (19)]. is calculated as

12  $Y_H = (nH_2 M_{H_2}) / (V_L * (COD_i - COD_f)) \text{-----}(18)$

13  $nH_2 = V_{H_2} P / RT \text{-----}(19)$

14 where, Y<sub>H</sub> is H<sub>2</sub> yield in mg-H<sub>2</sub>/mg-COD; nH<sub>2</sub> is the moles of recovered hydrogen recovered

15 calculated from the ideal gas law based on the volume of hydrogen recovered, M<sub>H<sub>2</sub></sub> is the

16 molecular weight of hydrogen, and V<sub>L</sub> is the volume of liquid in the anode chamber, reactor

17 influent COD is COD<sub>i</sub> and effluent COD is COD<sub>f</sub> for continuous process as well as batch

18 process; V<sub>H<sub>2</sub></sub> is the volume of H<sub>2</sub> measured at 1 atm pressure; P (atm) is the pressure and R

19 the gas constant (0.08206) and T the absolute temperature (303 K) at the time of gas

20 sampling. For glucose considering representative of wastewater for experimentation, the

21 maximum molar yield of H<sub>2</sub> is 12 mol-H<sub>2</sub>/mol-glucose, and based on COD,

22 H<sub>2</sub> yield Y<sub>H<sub>2</sub></sub> = 0.126 g-H<sub>2</sub>/g-COD (Virdis et al., 2011).

23 Table 5. Representatives of hydrogen production from wastewater by MEC

MEC Capacity (L)	External power required kWh/kg COD	COD Removal (%)	H <sub>2</sub> production rate (m <sup>3</sup> H <sub>2</sub> /m <sup>3</sup> /d)	Reference

40	0.40	75±9	-	(Hui Guo et al., 2019)
120	0.75	16	0.015	(S. E. Cotteril, 2017)
100	0.63	33	0.007	(S. E. Heidrich, 2012)
10	0.9	66-76	0.04	(Gil Ceria et al., 2012c)
1000	1.15	62	Trace	(R. D. Cusieck et al., 2011)

1

### 2 **3. Water and Wastewater cycle management in Bangladesh**

#### 3 **3.1 General overview of water supply system in Bangladesh**

4 Three types of water utilities ensure the smooth supply of water to the consumers of urban,  
5 peri urban population as well as industry and service organizations, these are Water Supply  
6 and Sewerage Authorities (WASAs), City corporations and Pourashavas, In addition to  
7 these Bangladesh Export Processing Zones (BEPZA), Economic zone authorities (EZA),  
8 and private deep tube wells are supplying domestic and industrial water to the private  
9 consumer in case they are not recipients of supply facilities. Various tier of authorities' issue  
10 licences for sinking deep tube wells and drawing ground water for respective consumptions.  
11 DWASA, Chittagong WASA, Rajshahi WASA, Khulna WASA are responsible of water supply  
12 and sewerage management of the metropolitan cities of Dhaka, Chittagong, Rajshahi and  
13 Khulna. In addition to WASAs, Bangladesh has 532 urban areas classified into 11 City  
14 Corporations and 318 Pourashavas (Municipalities) run by elected Pourashava councils.  
15 Pourashavas are further classified as A, B and C categories. Urban areas are categorized as  
16 larger city corporations or A, B, and C class based on the annual minimum of annual  
17 revenues collection (Bangladesh Bureau of Statistics, 2018). Water supply to the respective  
18 city corporations and most of the pourasovas are carried out by their own arrangement  
19 through coordination with local government engineering department and public health

1 department- important organs of government. Among all the cities Dhaka being the capital  
 2 city and more than 2 million citizens are living at the city. Dhaka WASA supplying 2550 MLD  
 3 and produce approximately 91 litre/person wastewater every day. But treating these huge  
 4 amount of wastewater only one Sewage treatment plant ( STP) treating only 20% of total  
 5 waste stream (DWASA Audit-Report-2017-18). For Treatment of industrial wastewater  
 6 generated from different industries within EPZs, there are central ETP, and industrial ETPs  
 7 but full potentials are not utilized. For treating textile, garments, and leather industries  
 8 wastewater there are separate ETPs are in place, but all are not fully operational due to cost,  
 9 lack of awareness and less stringent of regulation. Out of other industries, some of them  
 10 have ETPs but most of the industries are not use ETPs or not operational though as per  
 11 Department of Environment (DoE) under Ministry of Environment and Forest (MoEF) of  
 12 Bangladesh, reported that number of ETPs increased from 535 in 2011 to 1773 until May  
 13 2019 (Haque, 2020).Regarding monitoring and quality assurance of wastewater discharge,  
 14 DoE, look after limited ETPs, Ministry of Textile and Jute looks after operational activities  
 15 of respective ETPs from 2014. BEPZA is responsible of water supply and sewerage services  
 16 within EPZs. Besides, BEZA is planned to construct 100 zones throughout the country as  
 17 well as centralized STPs and ETPs in each of these zones. Regarding the fate of rural  
 18 wastewater does not have any statistics.

19 **3.2 Wastewater discharge regulation**

20 According to DoE, Environment Conservation Rules, 1997 of Bangladesh, there are  
 21 standard value for different effluents parameters based on industry which need to follow  
 22 before discharging into the environment. Following table summarizing the parameters with  
 23 limit for compliance(The Environment Conservation Rules, 1997 ).

24 Table 6. DoE standard of municipal and industrial effluent of Bangladesh

Type and source of	Parameters limit for compliance						
Effluent	pH	BOD	COD	TDS	SS	Oil&	Others

						Grease	
Municipal ww		40	-		100	-	Coliform 10/ml
Sugar industry ww	6-9	150	200-400	-	150	10	-
Food processing, dairy industry ww	6-9	150	200-400		100	10	-
Textile industry ww	6.5-9	150	200-400	400	100	10	
Pulp & paper industry ww	6-9	30-50	300-400		100		-
Distillery	6-9	500	-	-	150	10	
Tannary/leather industry ww	6-9	100	200-400	2100	-	-	-
Oil refinery ww	6-9	30	-	-	100	10	-

1

### 2 3.3 Inventory of domestic and industrial wastewater of Bangladesh

3 Though various organizations are responsible for water supply and wastewater management  
4 but very few STP/WWPTs for municipal wastewater treatment though there are CETPs,  
5 ETPs, in the various industries either centrally or individually are in place. But there is no  
6 central statistics or data base of wastewater production generation and discharge. As there  
7 is no database, so for assessing total domestic wastewater production, income base  
8 economical estimation approach has been adopted where total population, citizens monthly  
9 earning both middle class group of people's monthly income (Bank, 2010) and average per  
10 capita per month income has been considered according to equation 20, supply water also  
11 be calculated by equation 21 (Campos and Von Sperling, 1996). Produced wastewater,

12  $WW_p \text{ (litre/person/day)} = 57.9 + 8.0 * X \text{-----(20)}$

13  $W_p \text{ (litre/person/day)} = X / (0.021 + 0.003 * X) \text{-----(21)}$

1 Where, X is Number of minimum salaries per month (0.5 and 3.0 based on average and  
 2 middle class groups salary respectively considering 100 USD a unit )

3 Total estimated wastewater inventory is presented on the following table 7. On the other  
 4 hand for calculating industrial wastewater, major industries operating at the major cities,  
 5 BEPZAs industries situated at different EPZs, textile and leather industries as a whole,  
 6 pharmaceutical industries, vegetable oil industries, dairy mills , pulp and paper industries  
 7 have been considered. There are about 28,065 industrial establishment in Bangladesh,  
 8 mostly located in the large towns of Dhaka, Chittagong, Khulna, Rajshahi, Barisal and Sylhet  
 9 (David et al., 2010) . As these industries are not maintaining statistics complete statistics of  
 10 wastewater production that's why quantification of Industrial wastewater has been carried  
 11 out by consulting various literatures, industrial association reports, annual report of major  
 12 industries which tabulated at table 8.

13 Table 7. Domestic wastewater inventory of Bangladesh

Area/water supply authority/group of people based on income	No of people (Million)	Wastewater production rate (Ltr/per/day)	Wastewater production based on average Income (USD/person/month)	Total Wastewater production Million m <sup>3</sup> /yr
Dhaka WASA	20	91	-	664.33
Chittagong WASA	6	91		199.6
Middle income group	37	91.6	300	1241.11
Rest of the population	122.57	61.9	50	2769.28
Total domestic wastewater production				4874.32

14

15 Table 8. Industrial wastewater inventory of Bangladesh

Type of Wastewater	pH	BOD	COD	Reference	Reference
--------------------	----	-----	-----	-----------	-----------

industry	production, (million m <sup>3</sup> /yr)		mg/l	mg/l	Year for quantification	
Dairy	14.56	6- 11	600- 2000	800- 4500	2017	(Datta et al., 2019)  (Envirocheme, 2015)
Textile	288	6- 11	350- 600	1200- 1750	2019	(Hossain et al., 2018)
Leather	30		490- 610	1610- 1750	2016	(Chowdhury et al., 2018)
Pharmaceutical	0.188	9- 12	20- 500	900- 1600	2012	(Paper et al., 2015)
Sugar mills	7.080	5.5- 7.1	500- 8200	800- 12000	2008	(Karim, 2008)
Paper mills	25.112	7- 7.5	90- 150	320- 810	2010	(Rahman and Kabir, 2010)
Vegetable oil	5.6	2-7	42- 4340	640- 17000	2018	(Ahmad et al., 2020)
Chemical and Plastic industries	3.65	6.1- 9	2354- 2615	2912- 5239	2019	(Nasr et al., 2007)
BEPZA	37.595	-	--		2018	(BEPZA Annual Report, 2018)
Other(10% of all industries)	41.177					
Total	452.952					

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27

**4. Estimated energy potential of wastewater sector in Bangladesh**

**4.1 Selecting suitable technology for harnessing energy from wastewater**

In the previous paragraph 2, both common and emerging technologies which are already implemented and potential to implement have been discussed in depth. Integrating energy generation technology with wastewater treatment process is not straight forward- need details study for technical as well as financial point of view. Integration is most suitable for newly planned WWTPs if consider during planning stage. As already mentioned before that due to high cost of treatment and initial heavy investment is required that's why developing countries ignore this issue and indirectly damaging the environment, health and total ecosystem. Adequate data, analysis of previous data on wastewater collection, treatment and discharge, cost analysis of action and no action in terms of wastewater treatment will instigate to plan, think and consider for harnessing energy from this unexplored sector. Well composed plan, careful prefeasibility and feasibility study, engineering, and development strategy will lead to integrate energy harvesting technology to the WWTP. Figure 8 illustrate the probable step to be followed for deciding energy tapping steps from any WWTPs in general. In this figure both common and emerging technologies have been considered for energy generation from wastewater. Initially prefeasibility study needs to be carried out to find out which technology match better based on the detail discussion on the section 2. If no technology is suitable, then decision may be taken to drop the plan for integrating energy generation option from that WWTP. If single or two technologies suits for integration then carry out feasibility study, based on feasibility study if it is found that implementing single technology AD or MHP then engineering and development step may be considered before installation and commissioning.

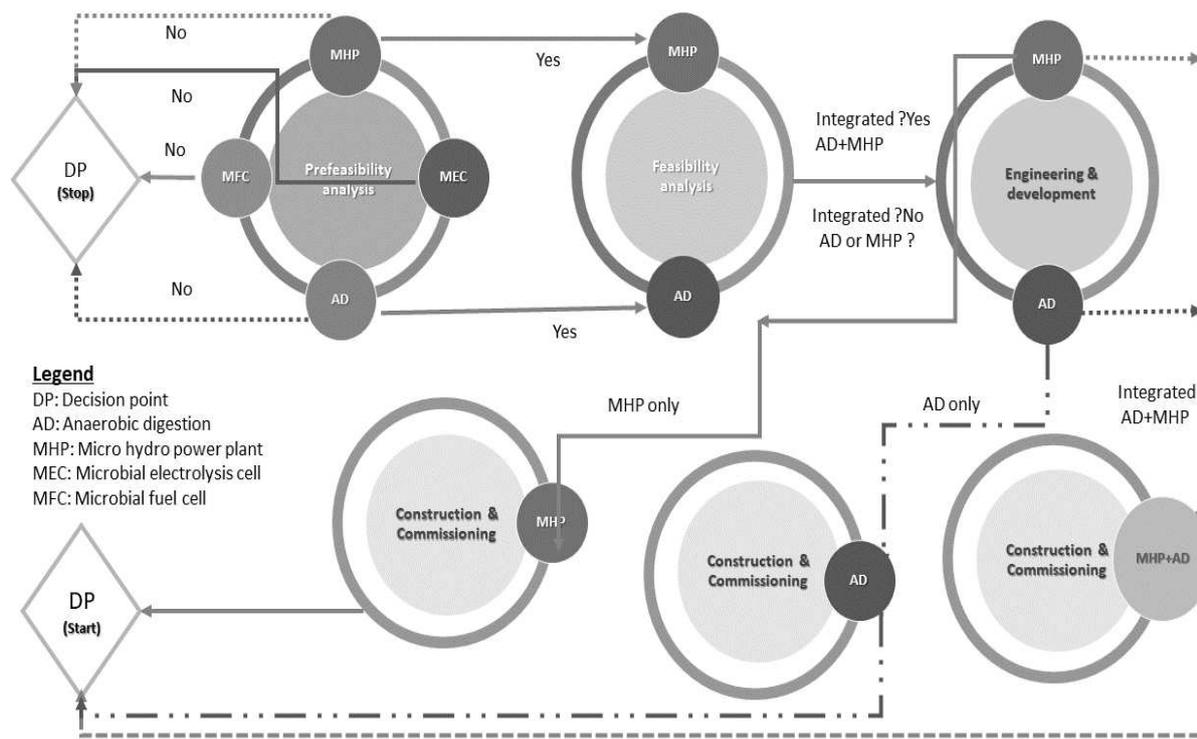


Fig 8. Flow diagram of integrating energy generation technologies at WWTP.

#### 4.2 Calculation of energy potential from wastewater

All the estimated wastewater will not be possible to utilize for energy generation, may be certain percentage can consider for harnessing energy. Accordingly, 10 scenarios both single and integration of two technologies have been considered for energy estimation. Table 9 describe the 10 scenarios starting from 10% domestic wastewater (DWW) and 10% Industrial wastewater (IWW) corresponding to implementable technologies for harvesting energy.

Table 9 Possible scenarios for energy potential calculation

Scenario	% of DWW (millm <sup>3</sup> /y)	% IWW (millm <sup>3</sup> /y)	Technology
1	10	10	MHP
2	10	10	AD
3	10	10	MHP+AD

4	25	25	MHP+AD
5	50	50	MHP+AD
6	10	10	MFC
7	10	10	MEC
8	10	10	MEC+MFC
9	25	25	MEC+MFC
10	50	50	MEC+MFC

1

2 For calculating the hydropower potential through micro-hydro power plant (MHP) scheme, in  
3 scenario 1, 3,4 and 5, gross head has been considered only 1 metre (m). Overall efficiencies  
4 for hydropower generating systems can vary from 50 to 70%. Therefore, to determine a  
5 realistic power output, the theoretical power must be multiplied by an efficiency factor of 0.5  
6 to 0.7 (Saket, 2008). In scenarios 2, 3,4 and 5, for calculating biogas generation by  
7 anaerobic digestion (AD) from sewage sludge of wastewater has been consider. Biogas is  
8 produced from two type of wastewater sludge, primary sludge and activated sludge and  
9 production rates are 380 ml/g VS and 612 ml/g VS respectively (Hanjie, 2010). Two key  
10 factors are important when assessing the biogas potential from sewage sludge (1) the  
11 amount of sewage sludge available to be digested, and (2) the biogas yield that can be  
12 achieved (Rao et al., 2010). It is reported that BOD<sub>5</sub> and COD values of domestic  
13 wastewater were found at STP of DhakaWASA, are 500 mg/l and 2500 mg/l respectively (  
14 DWASA Report,.2018) As per ref (Hamilton et al., 2014) wastewater contain TVS and TS are  
15 1420 mg/l and 3124 mg/l respectively. For calculation of energy potential from wastewater by  
16 MFC is based on the real time experimental results which is 3.7 W/m<sup>3</sup>(Gude, 2016). Finally  
17 calculation of hydrogen by MEC from wastewater is calculated based on the practical  
18 assumption which is (15L-H<sub>2</sub>/m<sup>3</sup>-influent/day) (Aiken et al., 2019) and energetic estimation  
19 has been done considering 1 kg of H<sub>2</sub> is equivalent to 33.33 kWh energy ( H<sub>2</sub> data).

20

1

2 Table 10 Scenarios wise calculated energy potential

Scenario	Total wastewater (million m <sup>3</sup> /y)	Technology	Calculated gas production by AD or MEC Biogas/H <sub>2</sub>	Equivalent Potential energy ( GWe/y)
1	532.709	MHP	-	1829.09
2	532.709	AD	0.372 mill m <sup>3</sup> /yr	2.418
3	532.709	MHP+AD	0.372 mill m <sup>3</sup> /yr	1831.508
4	4478.770	MHP+AD	0.931 mill m <sup>3</sup> /yr	4478.770
5	9152.540	MHP+AD	1.86 mill m <sup>3</sup> /yr	9152.540
6	532.709	MFC	-	1.971
7	532.709	MEC	679.455 mill ltr/yr	18.909
8	532.709	MEC+MFC	679.455 mill ltr/yr	20.88
9	4478.770	MEC+MFC	1698.637 mill ltr/yr	52.19
10	9152.540	MEC+MFC	3397.275 mill ltr/yr	104.4


3

4 **4.3 Results and Discussion**

5 Estimated energy potential is based on 10-50% of generated domestic and industrial total  
6 wastewater. Wastewater inventory is based on limited archived secondary data, unavailable  
7 information and statistics have been reasonably assumed. About the proposed technologies,  
8 MHP at WWTP, effluent is a well-recognised means of recovering electricity by taking  
9 advantage of constant discharge from WWTPs and some head though depend on the site.  
10 Archimedes screw, water wheels and other turbines deliver reliable performance when  
11 applied to downstream scheme. However, if hydro scheme is applied to untreated  
12 wastewater, then percussion must be taken against corrosion. During pre-feasibility study, in  
13 addition to flow rate, gross head can be estimated through geographical information


1 system(GIS) and power potential can be estimated (Almaliki, 2019). Large-scale applications  
2 in Australia, UK and Ireland, Jordan, Austria have proven the economic viability of  
3 hydropower technologies in WWTPs. For assessing hydropower potential in this paper, as  
4 there is no data on gross head and not consider any head other than 1 m, so assuming a  
5 range of head from 0.25 to 10 m, and considering only 10% of total wastewater, a big  
6 difference can be noticed which is shown in fig 11. Sometime head is hard to find out for  
7 WWTP at plane land but following the fig 3, slope can be increased to get an enhanced flow  
8 velocity according to the Hazen Williams and Manning equations ( Eq 3 and 6) by storing  
9 effluent in a separate reservoir and that effluent can be channelled for urban or peri urban  
10 agriculture. According to equation (2) exponential power potential can be calculated if flow  
11 velocity can be increased by double then power will be increased by quadruple times. As  
12 mentioned before that either upstream or downstream scheme of hydropower plant may be  
13 planned though corrosion is a significant barrier for upstream scheme. From table 2, it shows  
14 that there are good number of wastewater hydropower plants are operational using the  
15 upstream influent. Using corrosion resistant material for turbine and associated components  
16 which are in direct contact with influent may solve this issue. Stainless steel, grey cast iron,  
17 composite material, alloy steel etc are suitable to encounter this issue (Kehrein et al., 2020).  
18 Regarding AD Technology, using WWTP sludge as feedstock to generate biogas is kind of  
19 similar technology to produce biogas from municipal solid waste, cattle manure which is  
20 practicing long before in Bangladesh and other parts of the developing country. The  
21 production of biogas by AD from sludge is currently the most widely used energy recovery  
22 method worldwide. About 80% of the biodegradable COD fraction in the sludge can be  
23 converted into biogas. Traditional AD technology is common but harnessing additional  
24 biogas from wastewater need advanced technology and developed countries are adapted and  
25 major part of energy requirement of treating process is meeting up by energy generation  
26 from biogas. Fig 10 and 12, shows that, in terms of equivalent energy potential AD's  
27 contribution is not significant but can be considered after feasibility study. Regarding MEC  
28 and MFC, both technologies still not commercialized but carry much potential as

1 simultaneous wastewater treatment is possible with these processes though bioremediation  
 2 is not consistent. A typical WWTP with aerobic activated sludge and anaerobic sludge  
 3 digestion process consumes approximately 0.6 kWh of energy per m<sup>3</sup> of wastewater  
 4 treated, (McCarty et al., 2011). Wastewater treatment by lagoons, trickling filters require 0.09-  
 5 0.29, 0.18-0.42 kWh/m<sup>3</sup> of energy respectively (Logan, 2008). Reducing this energy  
 6 consumption and extracting energy from wastewater, dedicated study is going on for  
 7 example at least 12 plants in Europe and the USA have been reported as reaching more  
 8 than 90% energy self-sufficiency. The European research project Power-step is currently  
 9 elaborating designs for energy neutral and energy-positive WWTPs through six different  
 10 case studies (Kehrein et al., 2020). These research outcomes inspire to adopt such  
 11 technology which will exhibit double benefit simultaneously like MEC and MFC. In addition to  
 12 electricity and hydrogen generation by MEC and MFC, three product groups are particularly  
 13 possible to extract from wastewater. These are (1) Bulk chemicals, like biofuels, platform  
 14 chemicals and plastics. (2) High-value chemicals, like pharmaceutical precursors, antibiotics  
 15 and pesticides and (3) Inorganics like nutrients, struvite which can serve as fertilisers. As  
 16 performance of MEC/MFC still not stable till that time hydropower is the most viable option  
 17 to integrate with wastewater treatment process. Fig 12 shows that energy generation from  
 18 MHP exhibits most promise compared to any other common and emerging technology. If 50%  
 19 wastewater can be utilized then more than 9000 GW/yr of power can be explored and  
 20 according to Fig 10, hydropower production varies significantly with head.

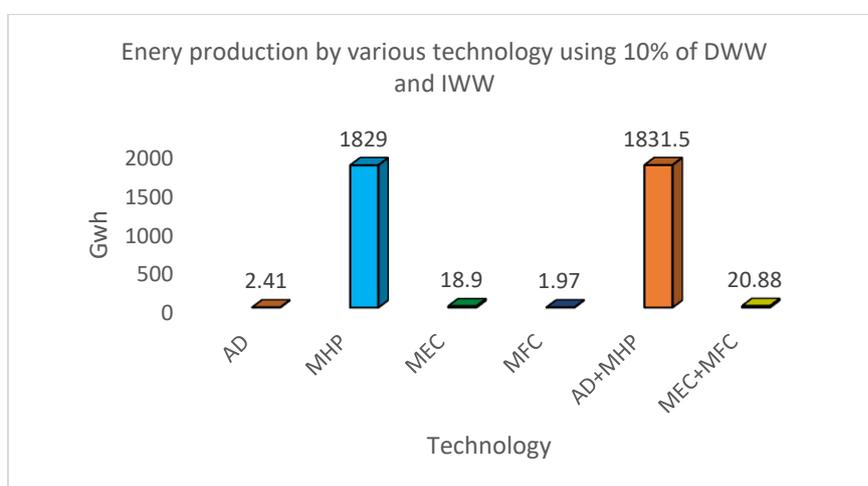


21

1 Fig 9 Energy potential based on different technology

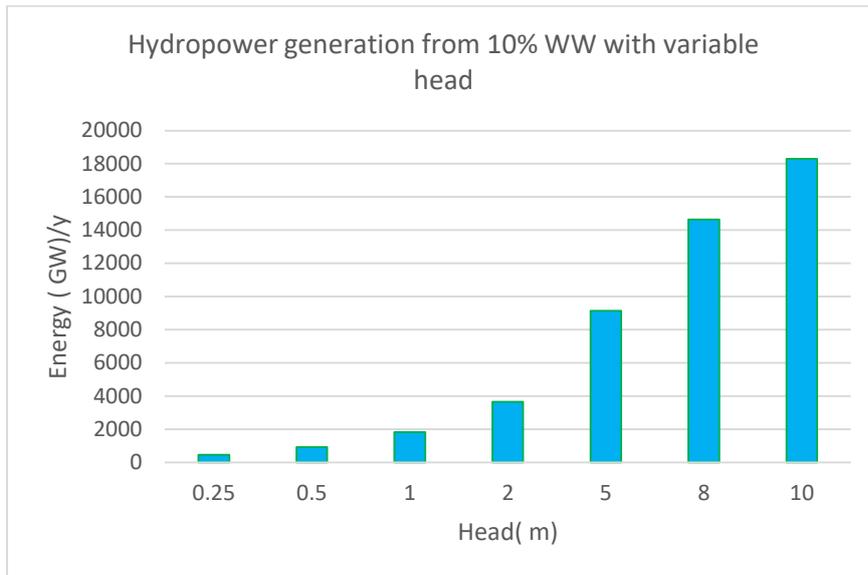


2

3 Fig 10. Hydropower potential based different head.

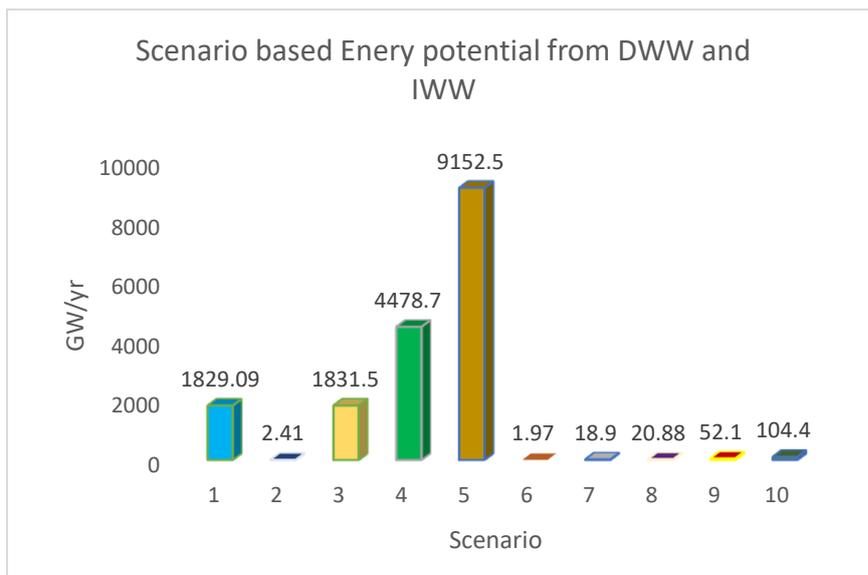

4

5 Fig 11 Scenario based energy potential

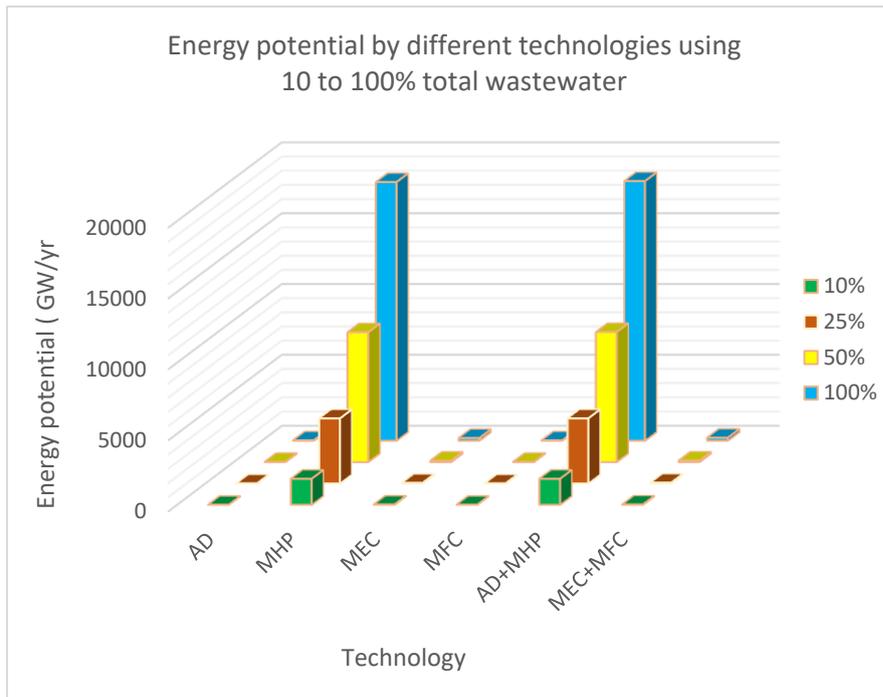

1

2 Fig 12 Estimated energy potential by different technologies using 10 to 100 % wastewater

3

4 **5 Potential barrier, overcoming strategy and recommendation to tap energy from**  
 5 **wastewater sector**

6 **5.1 Barrier and overcoming strategy**

7 There are several hurdles to explore the wastewater sector is a potential source of  
 8 renewable energy, it is a kind of fixed source as every day wastewater will produce, need  
 9 careful planning focus, intention, consensus, technical know-how and expertise. Among the  
 10 potential barriers regulatory, policy, lack of awareness, lack of knowledge and lack of  
 11 interest, technical, financial, are the most significant.

12 Out of these barrier, policy and regulations system plays a vital role because if policy is  
 13 supported by regulations and law which is to implement by law enforcing agency of  
 14 government then all citizen and stakeholders are obliged to follow that. For example, If  
 15 policy is like that, all consumers irrespective of individual, institution or industrial must have  
 16 to keep a record about the wastewater production either individually or centrally and  
 17 regulatory body can monitor the activities in terms of wastewater generation, discharge,

1 treatment, effluent quality and all other related matters then majority of the problem will be  
2 solved. Data and information on wastewater generation, treatment and use is essential for  
3 policymakers, researchers, practitioners, and public institutions in order to develop national  
4 and local action plans for protecting environment and productive use of wastewater.  
5 Regarding lack of awareness, interest, knowledge can be nurture, enriched and grow by  
6 changing view perspective. If most of the citizen know the consequences of releasing  
7 untreated or inadequately treated wastewater into the environment, then will be careful about  
8 discharging untreated wastewater. Knowing the harmful effects on human health, negative  
9 environmental impacts, and adverse implications on economic activities will lead all concern  
10 to enhance their awareness, interest and knowledge. Bangladesh is a developing densely  
11 populated country, human development index (HDI) is one of the lowest compare the other  
12 nation which greatly depend on per capita energy consumption. If energy production can be  
13 harnessed from renewable source like wastewater then not only energy generation will be  
14 increased but also overall countries position will be elevated. In this connection motivation,  
15 publicity by various institution is essential to encourage strong will and keen interested to  
16 explore this untapped potential energy source. In regards of technical and financial analysis,  
17 through pre-feasibility study by software analysis and not investing much time and money  
18 potential site with source can be identified. To do this public educational and research  
19 organization can play a vital role on this aspect. Loyal to the rules and regulations, a bidding  
20 by the instructions, self-awareness above all coordinated effort by all stakeholders are the  
21 winning strategy for any kind of challenge or barrier. As wastewater is considered as a  
22 valuable resource so like other resources, from of recycle, reuse and recovery (RRR)  
23 perspective, nine bottlenecks have been identified and grouped into three categories

- 24 • Economics and value chain
  - 25 (1) Process costs.
  - 26 (2) Resource quantity.
  - 27 (3) Resource quality.

- 1 (4) Market value and competition.
- 2 (5) Utilisation and application.
- 3 (6) Distribution and transport.
- 4 • Environment and health
- 5 (7) Emissions and health risks.
- 6 • Society and policy
- 7 (8) Acceptance.
- 8 (9) Policy.

9 All these bottlenecks somehow related with previously mentioned barriers and possible to  
10 address by following above mentioned strategy. However, the successful implementation of  
11 RRR in wastewater sector heavily depend on policy and legislative frameworks, market  
12 values and the competitive situation, as well as user acceptance of a recovered energy and  
13 willingness to pay for that.

## 14 **5.2 Recommendation**

15 In line with sustainable development, for exploring the untapped potential of wastewater in  
16 the context of developing country particularly for Bangladesh in addition to following  
17 overcoming strategy discussed above following suggestions are recommended:

- 18 • A proper and consolidated inventory of wastewater is essential-that can be developed by  
19 holistic approach by all stakeholders like water producers, consumers and policy and  
20 regulatory body.
- 21 • A prefeasibility as well as subsequently feasibility analysis may be carried out by local  
22 authority by the public university focussing new STP/CETP/WWTP.
- 23 • For technical and financial viability analysis, a pilot project both for AD and MHP may be  
24 planned, funded, developed, and implemented by WASA/BPDB/autonomous body or  
25 public private partnership (PPP) basis.
- 26 • In terms of energy generation system integrating into the STP/CETP/WWTP local  
27 resource may be explored or developed collaborating with the local university or national

1 public/ private research institution for capacity building and attaining self-dependency on  
2 technical expertise.

- 3 • As hydropower potentiality is outperform other common and emerging technology, so it is  
4 strongly recommended to plan and execute a pilot project anywhere in the country where  
5 wastewater flow rate and gross head are optimum to get a hands on experience to scale  
6 up further at the other WWTPs as well.

7

## 8 **6 Conclusion**

9 According to government plan 10% renewable energy is expected but till time only 0.19%  
10 solar, 1.18% is hydropower has been integration with total production system. Only 75.92 %  
11 citizen has access to electricity. To increase the electricity generation and increase the share  
12 of renewable energy sources is the top priority of Bangladesh. In this situation, energy  
13 investment for wastewater treatment is not the priority for the WWTPs stakeholder. But if  
14 wastewater can produce a reasonable percent of energy utilizing its potential then all  
15 concern will be interested to treat their wastewater and discharge the treated water to the  
16 environment. As wastewater treatment is an expensive and energy intensive process that's  
17 why most of the wastewater disposed to the nearby waterbody causing environment  
18 pollution, greenhouse gas emission. Developing country like Bangladesh need to focus also  
19 for treating her wastewater for better good and harnessing energy from this untapped source  
20 of renewable energy like developed world. There are few emerging technologies have been  
21 discussed in detail to understand how these technologies would be integrated with  
22 wastewater treatment process. A methodology has been also suggested to evaluate  
23 implementable technology at the WWTPs. Based on the previous empirical formula and  
24 experimental data of other literatures, an approximate estimation has been completed  
25 considering 10 scenarios. Out of these, scenario 1, using only 10% of total generated  
26 wastewater produce 2.41, 1829, 18.9 and 1.97 Gwe/yr energy through AD, MHP, MEC and  
27 MFC technologies, respectively. For MHP, 1 m gross head has been deemed and  
28 considering 0.25 m to 10 m gross head, MHP shows expected performance and

1 outperformed other process. This energetic study focussing on ignored and untapped  
2 resource- wastewater which is otherwise viewed as burden to society can be source of  
3 potential source of renewable energy. Findings of the study will aid to decide by the  
4 stakeholders of industries, energy producers, wastewater utilities, policy makers and  
5 regulatory bodies to tap energy from this dirty and ignored sector. Study outcome also will be  
6 an inspiration for the researchers and scientist to explore the potential renewable energy  
7 source. Potential barriers, overcoming strategy also highlighted. Finally, few important  
8 recommendations have been suggested to implement and integrate with the mainstream of  
9 wastewater treatment, resource recovery and power generation.

#### 10 **Declaration**

#### 11 **Availability of data and materials**

12 All data generated or analysed during this study are included in this published article.

#### 13 **Competing interests**

14 The authors declare that they have no competing interests

#### 15 **Funding**

16 This research did not receive any specific grant from funding agencies in the public,  
17 commercial, or not-for-profit sectors.

#### 18 **Authors' contributions**

19 The theoretical framework, research design, data analysis, and inferences drawn was solely  
20 carried out and approved the final manuscript by the author.

#### 21 **Acknowledgements**

22 I acknowledge ,all sort of advice, suggestions and guide lines of my colleagues, friends well-  
23 wishers to conceptualize this paper and providing valuable information during development  
24 and drafting phase of this article. I particularly acknowledge the fruitful discussion about

1 important activities of present wastewater treatment system within WASA with  
2 Superintendent Engineer( Mr. Mustafa Kamal) of Dhaka WASA.

### 3 **7. Reference**

- 4 Ahmad, T., Belwal, T., Li, L., Ramola, S., Aadil, R.M., Abdullah, Xu, Y., Zisheng, L., 2020.  
5 Utilization of wastewater from edible oil industry, turning waste into valuable products: A  
6 review. Trends Food Sci. Technol. 99, 21–33. <https://doi.org/10.1016/j.tifs.2020.02.017>
- 7 Aiken, D.C., Curtis, T.P., Heidrich, E.S., 2019. Avenues to the financial viability of microbial  
8 electrolysis cells [MEC] for domestic wastewater treatment and hydrogen production.  
9 Int. J. Hydrogen Energy 44, 2426–2434. <https://doi.org/10.1016/j.ijhydene.2018.12.029>
- 10 Almaliki, A.H., 2019. Hydropower generated from wastewater flow of sewage system in  
11 mountain cities: Taif city as a case study. Int. J. GEOMATE 17, 181–186.  
12 <https://doi.org/10.21660/2019.61.81379>
- 13 Bachmann, N., 2015. Sustainable biogas production in municipal wastewater treatment  
14 plants. IEA Bioenergy 20.
- 15 Bangladesh Bureau of Statistics, 2018. Report on Bangladesh Sample Vital Statistics 2018,  
16 Monitoring the Situation of Vital Statistics of Bangladesh (MSVSB) 2nd Phase Project  
17 1–11.
- 18 Bank, A.D., 2010. The Rise of Asia’s Middle Class. Key Indic. Asia Pacific 2010 3–57.
- 19 BEPZA Annual Reprt 2018,
- 20 Board, D., 2018. Annual Report 2018-19.
- 21 Borole, A.P., Hamilton, C.Y., 2010. Energy production from food industry wastewaters using  
22 bioelectrochemical cells, in: Emerging Environmental Technologies. Springer  
23 Netherlands, pp. 97–113. [https://doi.org/10.1007/978-90-481-3352-9\\_5](https://doi.org/10.1007/978-90-481-3352-9_5)
- 24 Bousquet, C., Samora, I., Manso, P., Rossi, L., Heller, P., Schleiss, A.J., 2017. Assessment

1 of hydropower potential in wastewater systems and application to Switzerland. *Renew.*  
2 *Energy* 113, 64–73. <https://doi.org/10.1016/j.renene.2017.05.062>

3 Call, D., Logan, B.E., 2008. Hydrogen production in a single chamber microbial electrolysis  
4 cell lacking a membrane. *Environ. Sci. Technol.* 42, 3401–3406.  
5 <https://doi.org/10.1021/es8001822>

6 Campos, H.M., Von Sperling, M., 1996. Estimation of domestic wastewater characteristics in  
7 a developing country based on socio-economic variables. *Water Sci. Technol.* 34, 71–  
8 77. [https://doi.org/10.1016/0273-1223\(96\)00558-6](https://doi.org/10.1016/0273-1223(96)00558-6)

9 Chae, K.J., Kang, J., 2013. Estimating the energy independence of a municipal wastewater  
10 treatment plant incorporating green energy resources. *Energy Convers. Manag.* 75,  
11 664–672. <https://doi.org/10.1016/j.enconman.2013.08.028>

12 Chowdhury, Z.U.M., Ahmed, T., Antunes, A.P.M., Paul, H.L., 2018. Environmental life cycle  
13 assessment of leather processing industry: A case study of Bangladesh. *J. Soc.*  
14 *Leather Technol. Chem.* 102, 18–26.

15 Cusick, R.D., Bryan, B., Parker, D.S., Merrill, M.D., Mehanna, M., Kiely, P.D., Liu, G., Logan,  
16 B.E., 2011. Performance of a pilot-scale continuous flow microbial electrolysis cell fed  
17 winery wastewater. *Appl. Microbiol. Biotechnol.* 89, 2053–2063.  
18 <https://doi.org/10.1007/s00253-011-3130-9>

19 Dai, Z., Heidrich, E.S., Dolfing, J., Jarvis, A.P., 2019. Determination of the Relationship  
20 between the Energy Content of Municipal Wastewater and Its Chemical Oxygen  
21 Demand. *Environ. Sci. Technol. Lett.* 6, 396–400.  
22 <https://doi.org/10.1021/acs.estlett.9b00253>

23 Datta, A.K., Haider, M.Z., Ghosh, S.K., 2019. Economic analysis of dairy farming in  
24 Bangladesh. *Trop. Anim. Health Prod.* 51, 55–64. [https://doi.org/10.1007/s11250-018-](https://doi.org/10.1007/s11250-018-1659-7)  
25 [1659-7](https://doi.org/10.1007/s11250-018-1659-7)

- 1 David, W.J., Green, H., Kong, C., 2010. Managing Hazardous Wastes (Financed by the  
2 Asian Development Bank Technical Assistance Funding Program).
- 3 Demir, M.E., Chehade, G., Dincer, I., Yuzer, B., Selcuk, H., 2019. Synergistic effects of  
4 advanced oxidization reactions in a combination of TiO<sub>2</sub> photocatalysis for hydrogen  
5 production and wastewater treatment applications. *Int. J. Hydrogen Energy* 44, 23856–  
6 23867. <https://doi.org/10.1016/j.ijhydene.2019.07.110>
- 7 DWASA Audit-Report-2017-18.
- 8 Envirocheme, 2015. Wastewater treatment in the dairy processing industry - recovering  
9 energy using anaerobic technology 1–11. <https://doi.org/10.13140/RG.2.1.3875.4965>
- 10 Esha, 2005. Energy recovery in existing infrastructures with small hydropower plants 50.
- 11 Ge, Z., Zhang, F., Grimaud, J., Hurst, J., He, Z., 2013. Long-term investigation of microbial  
12 fuel cells treating primary sludge or digested sludge. *Bioresour. Technol.* 136, 509–514.  
13 <https://doi.org/10.1016/j.biortech.2013.03.016>
- 14 Gude, V.G., 2018. Integrating bioelectrochemical systems for sustainable wastewater  
15 treatment. *Clean Technol. Environ. Policy* 20, 911–924. [https://doi.org/10.1007/s10098-](https://doi.org/10.1007/s10098-018-1536-0)  
16 [018-1536-0](https://doi.org/10.1007/s10098-018-1536-0)
- 17 Gude, V.G., 2016. Wastewater treatment in microbial fuel cells - An overview. *J. Clean.*  
18 *Prod.* 122. <https://doi.org/10.1016/j.jclepro.2016.02.022>
- 19 Gude, V.G., 2015. Energy and water autarky of wastewater treatment and power generation  
20 systems. *Renew. Sustain. Energy Rev.* 45, 52–68.  
21 <https://doi.org/10.1016/j.rser.2015.01.055>
- 22 Guide to Biogas From production to use, 2015
- 23 Hamilton, D., Zhang, H., Doug, H., Zhang, H., 2014. Solid Content of Wastewater and  
24 Manure. *Oklahoma Coop. Ext. Serv.* 1–4.

- 1 Hanjie, Z., 2010. Sludge Treatment to Increase Biogas Production 2–24.
- 2 Haque, N., 2020. Mapping prospects and challenges of managing sludge from effluent  
3 treatment in Bangladesh. *J. Clean. Prod.* 259, 120898.  
4 <https://doi.org/10.1016/j.jclepro.2020.120898>
- 5 Heidrich, E.S., Curtis, T.P., Dolfing, J., 2011. Determination of the internal chemical energy  
6 of wastewater. *Environ. Sci. Technol.* 45, 827–832. <https://doi.org/10.1021/es103058w>
- 7 HIES, 2016. Preliminary report on Households Income and Expenditure Survey 2016 0–2.
- 8 Hossain, L., Sarker, S.K., Khan, M.S., 2018. Evaluation of present and future wastewater  
9 impacts of textile dyeing industries in Bangladesh. *Environ. Dev.* 26, 23–33.  
10 <https://doi.org/10.1016/j.envdev.2018.03.005>
- 11 Hua, T., Li, S., Li, F., Zhou, Q., Ondon, B.S., 2019. Microbial electrolysis cell as an emerging  
12 versatile technology: a review on its potential application, advance and challenge. *J.*  
13 *Chem. Technol. Biotechnol.* 94, 1697–1711. <https://doi.org/10.1002/jctb.5898>
- 14 Hydroreview, 2015, n.d. Website [WWW Document]. URL  
15 [https://www.hydroreview.com/2015/08/25/india-commissions-hydro-turbine-in-](https://www.hydroreview.com/2015/08/25/india-commissions-hydro-turbine-in-sewerage-plant-s-effluent-pipe/#gref)  
16 [sewerage-plant-s-effluent-pipe/#gref](https://www.hydroreview.com/2015/08/25/india-commissions-hydro-turbine-in-sewerage-plant-s-effluent-pipe/#gref) (accessed 4.10.20).
- 17 Jafary, T., Wan Daud, W.R., Ghasemi, M., Abu Bakar, M.H., Sedighi, M., Kim, B.H.,  
18 Carmona-Martínez, A.A., Jahim, J.M., Ismail, M., 2019. Clean hydrogen production in a  
19 full biological microbial electrolysis cell. *Int. J. Hydrogen Energy* 44, 30524–30531.  
20 <https://doi.org/10.1016/j.ijhydene.2018.01.010>
- 21 Karagiannidis, A., Samaras, P., Kasampalis, T., Perkoulidis, G., Ziogas, P., Zorpas, A.,  
22 2011. Evaluation of sewage sludge production and utilization in Greece in the frame of  
23 integrated energy recovery. *Desalin. Water Treat.* 33, 185–193.  
24 <https://doi.org/10.5004/dwt.2011.2613>
- 25 Karim, S., 2008. Characteriza Non of The Liquid Waste Of Characterization of the Liquid

1 Waste.

2 Kehrein, P., van Loosdrecht, M., Osseweijer, P., Garfí, M., Dewulf, J., Posada, J., 2020. A  
3 critical review of resource recovery from municipal wastewater treatment plants –  
4 market supply potentials, technologies and bottlenecks. *Environ. Sci. Water Res.  
5 Technol.* 6, 877–910. <https://doi.org/10.1039/c9ew00905a>

6 Kollmann, R., Neugebauer, G., Kretschmer, F., Truger, B., Kindermann, H., Stoeglehner, G.,  
7 Ertl, T., Narodoslowsky, M., 2017. Renewable energy from wastewater - Practical  
8 aspects of integrating a wastewater treatment plant into local energy supply concepts.  
9 *J. Clean. Prod.* 155, 119–129. <https://doi.org/10.1016/j.jclepro.2016.08.168>

10 L, M.P., 1964. Environmental requirement and control, *Anaerobic wastewater Treatment*  
11 *fundamentals part II. Public works volume 95 page 123-126, 1964.*

12 Lin, C.Y., Nguyen, T.M.L., Chu, C.Y., Leu, H.J., Lay, C.H., 2018. Fermentative biohydrogen  
13 production and its byproducts: A mini review of current technology developments.  
14 *Renew. Sustain. Energy Rev.* 82, 4215–4220.  
15 <https://doi.org/10.1016/j.rser.2017.11.001>

16 Lu, L., Ren, Z.J., 2016. Microbial electrolysis cells for waste biorefinery: A state of the art  
17 review. *Bioresour. Technol.* <https://doi.org/10.1016/j.biortech.2016.03.034>

18 Mahdi Mardanpour, M., Nasr Esfahany, M., Behzad, T., Sedaqatvand, R., 2012. Single  
19 chamber microbial fuel cell with spiral anode for dairy wastewater treatment. *Biosens.  
20 Bioelectron.* 38, 264–269. <https://doi.org/10.1016/j.bios.2012.05.046>

21 Martínez, E.J., Sotres, A., Arenas, C.B., Blanco, D., Martínez, O., Gómez, X., 2019.  
22 Improving anaerobic digestion of sewage sludge by hydrogen addition: Analysis of  
23 microbial populations and process performance. *Energies* 12.  
24 <https://doi.org/10.3390/en12071228>

25 McCarty, P.L., 1964. McCarty, P.L. Toxic material and their control, *Anaerobic wastewater*

1 Treatment fundamentals part III. Public works volume.

2 Min, B., Kim, J.R., Oh, S.E., Regan, J.M., Logan, B.E., 2005. Electricity generation from  
3 swine wastewater using microbial fuel cells. *Water Res.* 39, 4961–4968.  
4 <https://doi.org/10.1016/j.watres.2005.09.039>

5 Mo, W., Zhang, Q., 2013. Energy-nutrients-water nexus: Integrated resource recovery in  
6 municipal wastewater treatment plants. *J. Environ. Manage.* 127, 255–267.  
7 <https://doi.org/10.1016/j.jenvman.2013.05.007>

8 Nasr, F.A., Doma, H.S., Abdel-Halim, H.S., El-Shafai, S.A., 2007. Chemical industry  
9 wastewater treatment. *Environmentalist* 27, 275–286. [https://doi.org/10.1007/s10669-](https://doi.org/10.1007/s10669-007-9004-0)  
10 [007-9004-0](https://doi.org/10.1007/s10669-007-9004-0)

11 Never, B., 2016. Wastewater systems and energy saving in urban India.

12 Paper, C., Zaman, F., Chemical, A., Limited, I., Akter, S., Bishwabidyalay, G., 2015.  
13 Pharmaceutical Waste Water Treatment and The Efficiency Of ETP in Context Of  
14 Bangladesh 1, 24–31.

15 PATEL, D., JARDOSH, H., 2018. Application of Hydropower Technology in Wastewater  
16 Treatment Plants Step Towards Sustainable Environment. *Int. J. Innov. Res. Sci. Eng.*  
17 *Technol.* 7, 1818–1821. <https://doi.org/10.15680/ijirset.2018.0702105>

18 Pepé Sciarria, T., Tenca, A., D'Epifanio, A., Mecheri, B., Merlino, G., Barbato, M., Borin, S.,  
19 Licoccia, S., Garavaglia, V., Adani, F., 2013. Using olive mill wastewater to improve  
20 performance in producing electricity from domestic wastewater by using single-chamber  
21 microbial fuel cell. *Bioresour. Technol.* 147, 246–253.  
22 <https://doi.org/10.1016/j.biortech.2013.08.033>

23 Peu, P., Picard, S., Diara, A., Girault, R., Béline, F., Bridoux, G., Dabert, P., 2012. Prediction  
24 of hydrogen sulphide production during anaerobic digestion of organic substrates.  
25 *Bioresour. Technol.* 121, 419–424. <https://doi.org/10.1016/j.biortech.2012.06.112>

- 1 Rahman, M.M., Kabir, K.B., 2010. Wastewater treatment options for paper mills using  
2 recycled paper/imported pulps as raw materials: Bangladesh perspective. Chem. Eng.  
3 Res. Bull. 14. <https://doi.org/10.3329/cerb.v14i1.5236>
- 4 Rao, P.V., Baral, S.S., Dey, R., Mutnuri, S., 2010. Biogas generation potential by anaerobic  
5 digestion for sustainable energy development in India. Renew. Sustain. Energy Rev.  
6 14, 2086–2094. <https://doi.org/10.1016/j.rser.2010.03.031>
- 7 Report, A., 2017 Annual report
- 8 Rodrigo, M.A., Cañizares, P., Lobato, J., Paz, R., Sáez, C., Linares, J.J., 2007. Production of  
9 electricity from the treatment of urban waste water using a microbial fuel cell. J. Power  
10 Sources 169, 198–204. <https://doi.org/10.1016/j.jpowsour.2007.01.054>
- 11 Saket, R.K., 2008. Design, development and reliability evaluation of micro hydro power  
12 generation system based on municipal waste water. 2008 IEEE Electr. Power Energy  
13 Conf. - Energy Innov. <https://doi.org/10.1109/EPC.2008.4763355>
- 14 Sari, M.A., Badruzzaman, M., Cherchi, C., Swindle, M., Ajami, N., Jacangelo, J.G., 2018.  
15 Recent innovations and trends in in-conduit hydropower technologies and their  
16 applications in water distribution systems. J. Environ. Manage. 228, 416–428.  
17 <https://doi.org/10.1016/j.jenvman.2018.08.078>
- 18 Shan, Y., Guan, D., Liu, Jianghua, Liu, Z., Liu, Jingru, Schroeder, H., Chen, Y., Shao, S., Mi,  
19 Z., Zhang, Q., 2016. CO<sub>2</sub> emissions inventory of Chinese cities.  
20 Atmos. Chem. Phys. Discuss. 1–26. <https://doi.org/10.5194/acp-2016-176>
- 21 Strazzabosco, A., Kenway, S.J., Lant, P.A., 2020. Quantification of renewable electricity  
22 generation in the Australian water industry. J. Clean. Prod. 254, 120119.  
23 <https://doi.org/10.1016/j.jclepro.2020.120119>
- 24 Tartakovsky, B., Mehta, P., Santoyo, G., Guiot, S.R., 2011. Maximizing hydrogen production  
25 in a microbial electrolysis cell by real-time optimization of applied voltage. Int. J.

1 Hydrogen Energy 36, 10557–10564. <https://doi.org/10.1016/j.ijhydene.2011.05.162>

2 DoE, Bangladesh Environment Conservation Rules, 1997 .

3 UNESCO, U.-W., 2017. WWAP (United Nations World Water Assessment Programme).

4 2017. The United Nations World Water Development Report 2017. Wastewater: The

5 Untapped Resource. Paris, UNESCO.

6 Viridis, B., Freguia, S., Rozendal, R.A., Rabaey, K., Yuan, Z., Keller, J., 2011. Microbial Fuel

7 Cells, Treatise on Water Science. <https://doi.org/10.1016/B978-0-444-53199-5.00098-1>

8

# Figures

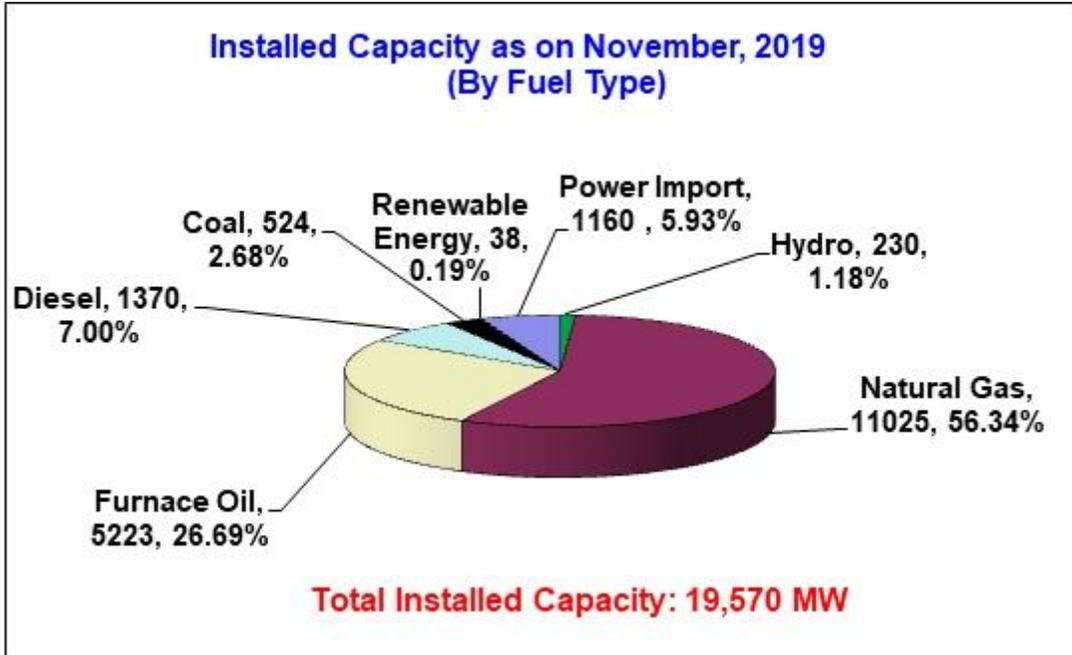


Figure 1

Total energy generation based on primary fuel and Renewable energy source.

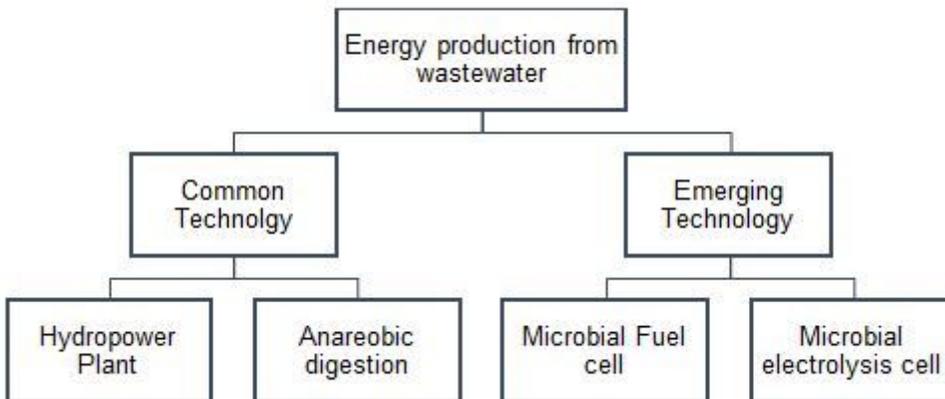


Figure 2

Energy production technologies suitable for wastewater

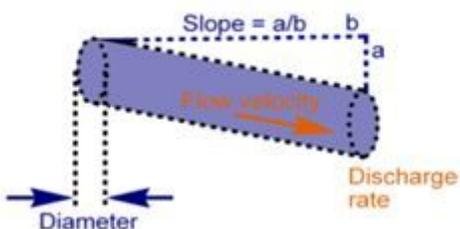


Figure 3

Pipe/channel slope and velocity relation of flowing water.


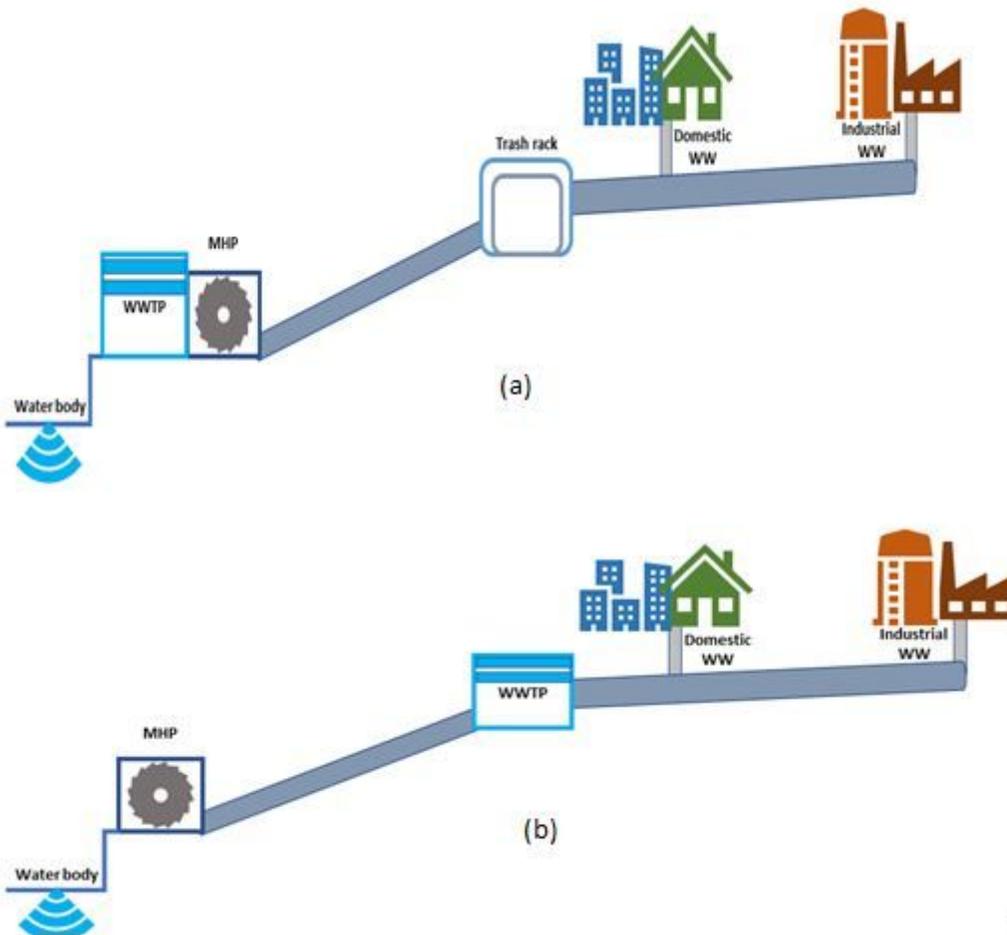



Figure 4

(a) Downstream Effluent Micro hydropower plant (DE-MHP) (b) Upstream influent hydropower plant (Modified from C. Bousquet et al. 2017)

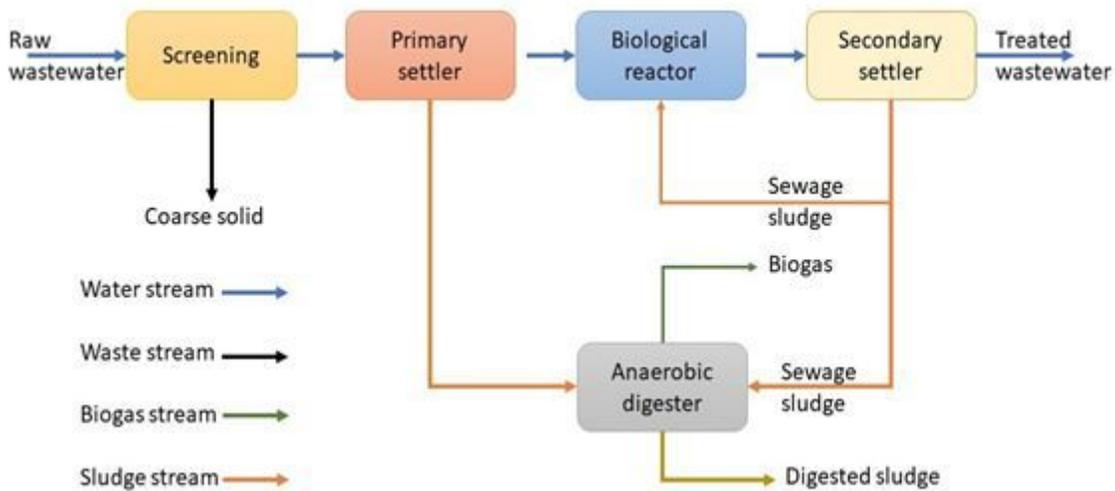


**Figure 5**

Schematic Illustration of biogas production from wastewater

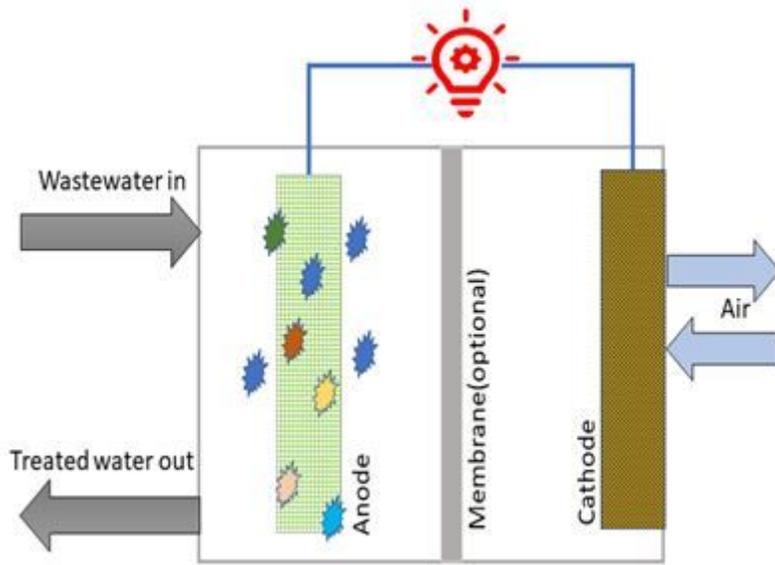

**Figure 6**

Schematic diagram of MFC

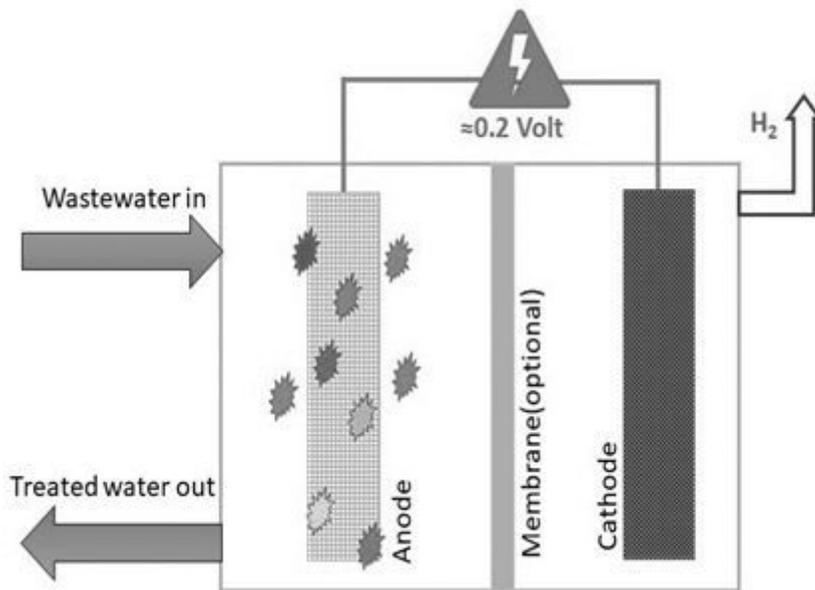

**Figure 7**

Schematic diagram of MEC

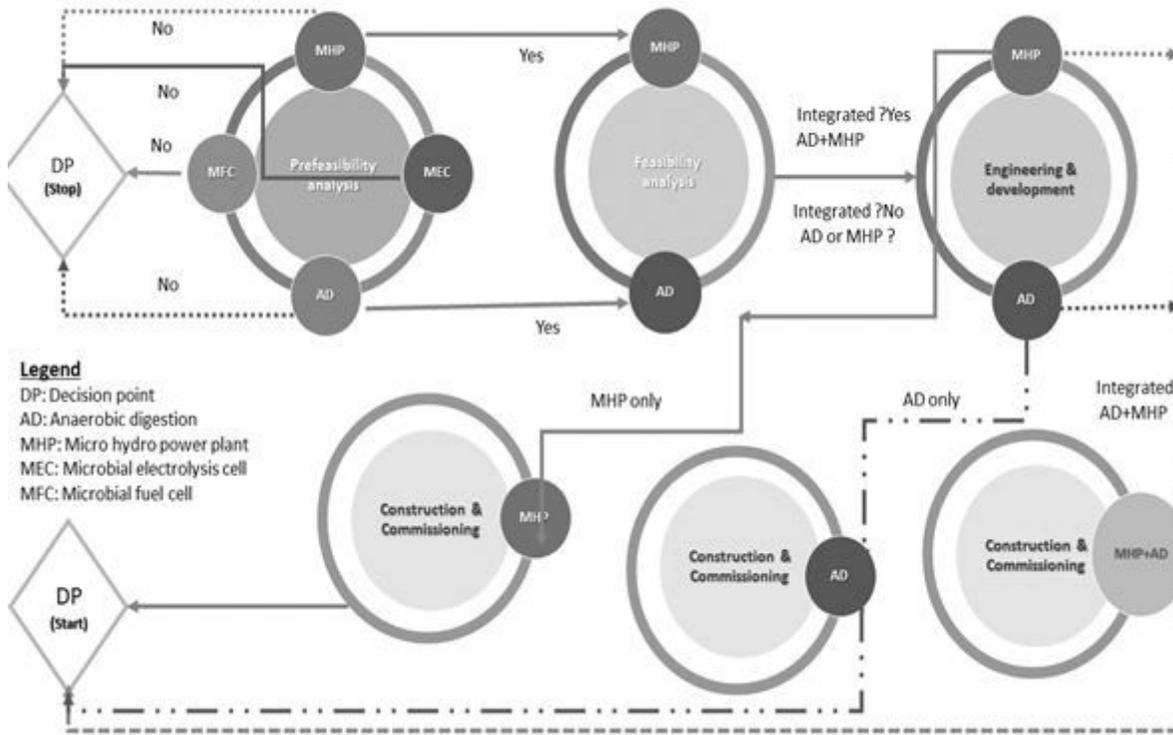


Figure 8

Flow diagram of integrating energy generation technologies at WWTP.


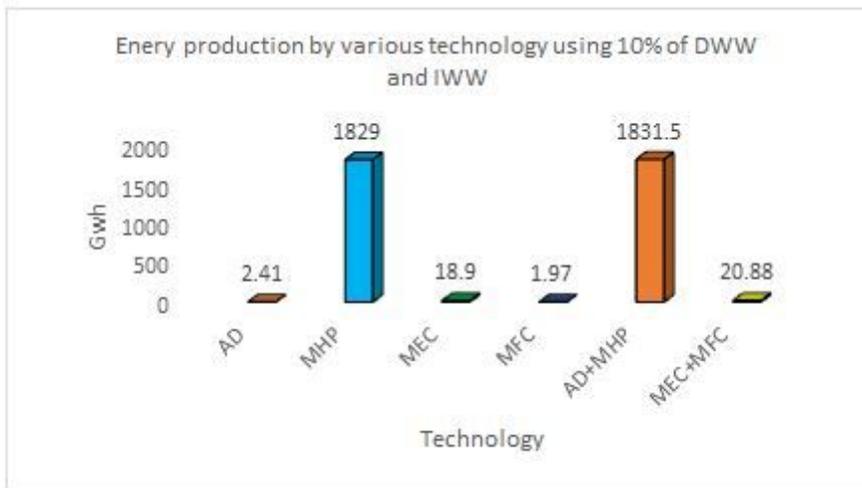



Figure 9

Energy potential based on different technology

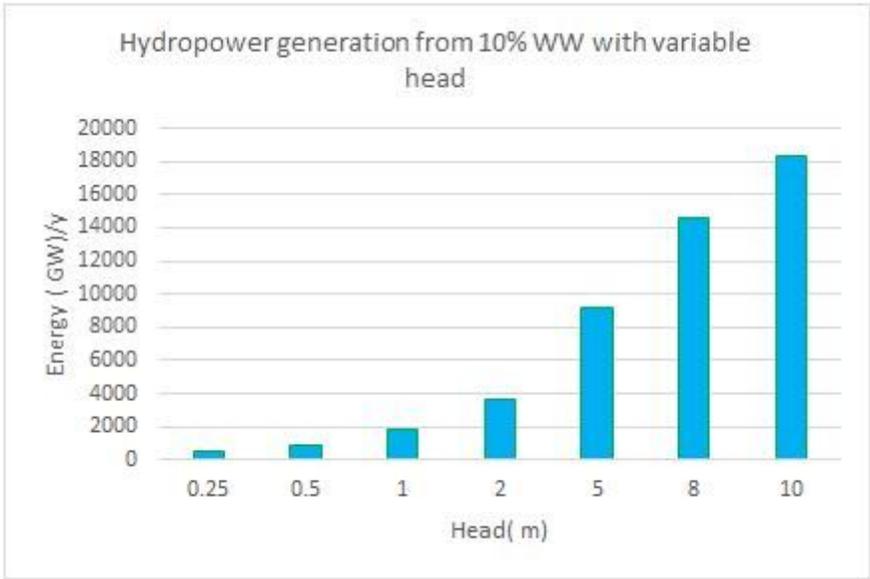


**Figure 10**

Hydropower potential based different head.

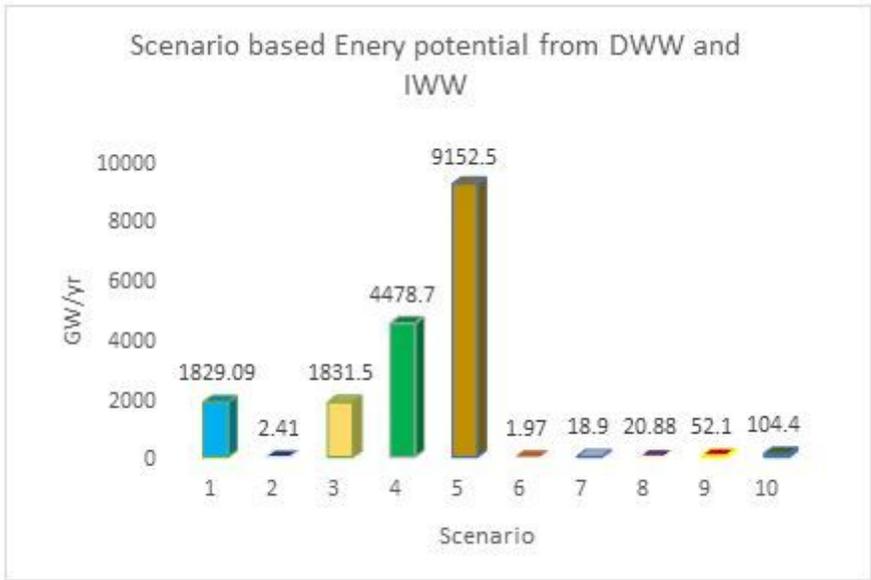

**Figure 11**

Scenario based energy potential

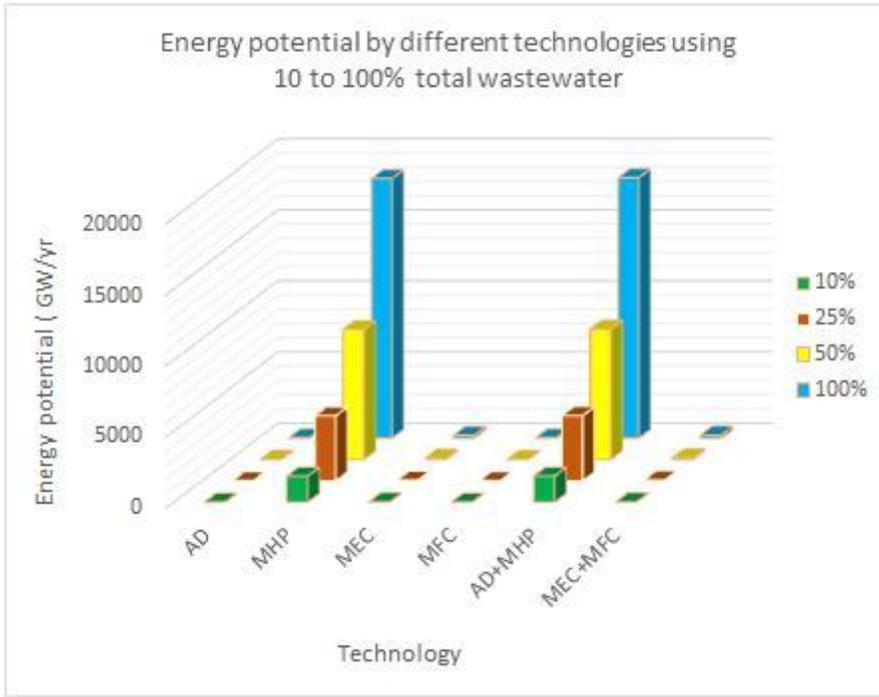

**Figure 12**

Estimated energy potential by different technologies using 10 to 100 % wastewater