

Turing patterns with high-resolution formed without chemical reaction in thin-film solution of organic semiconductors

Shunpu Li (✉ lishunpu@sztu.edu.cn)

Shenzhen Technology University

Zezhong Xiang

Shenzhen Technology University

Jin Li

University of Cambridge

Peng You

Shenzhen Technology University

Linbo han

Shenzhen Technology University

Mingxia Qiu

Shenzhen Technology University

Gengliang Chen

Shenzhen Technology University

Yu He

Shenzhen Technology University

Boyuan Xiang

Shenzhen Technology University

Yaorong Su

Shenzhen Technology University

Hongyu An

Shenzhen Technology University

Article

Keywords:

Posted Date: March 24th, 2022

DOI: <https://doi.org/10.21203/rs.3.rs-1443799/v1>

License: © ⓘ This work is licensed under a Creative Commons Attribution 4.0 International License.

[Read Full License](#)

Turing patterns with high-resolution formed without chemical reaction in thin-film solution of organic semiconductors

Abstract

Regular patterns can form spontaneously in chemical reaction-diffusion systems under non-equilibrium conditions as proposed by Alan Turing. Here, we found that regular patterns can be generated in uphill-diffusion solution systems without a chemical reaction process through both in-situ and ex-situ observations. Organic semiconductor solution is confined between two parallel plates with controlled micron/submicron-meter distance, to minimize convection of the liquid and avoid spinodal precipitation at equilibrium. The solvent evaporation concentrates the solution gradually into an oversaturated non-equilibrium condition, under which a phase-transition occurs and ordered concentration-waves are generated. By proper tuning of the experimental parameter, multiple regular patterns with micro/nano-meter scaled features (line, square-grid, zig-zag, and fence-like patterns etc.) were observed. We explain the observed phenomenon as Turing-pattern generation resulted from uphill-diffusion and solution oversaturation. The generated patterns in the solutions can be condensed onto substrates to form structured micro/nanomaterials. We have fabricated organic semiconductor devices with such patterned materials to demonstrate the potential applications. Our observation may serve as a milestone in the progress towards a fundamental understanding of pattern formation in nature, like in biosystem, and pave a new avenue in developing self-assembling techniques of micro/nano structured materials.

Introduction

Patterns occur in nature at various scales ranging from small atomic level to large scale of the universe.^{1,2} At conventional scale we see snow-flakes, ladybird's spots, zebra stripes, sand ripples etc. From a thermodynamic point of view, the patterns in nature could be classified into two categories. One is formed under thermodynamic equilibrium, such as crystal structures of major maters. While, another type is that formed under none-equilibrium condition, such as surface waves of water, animal's skin patterns. For the former case, the pattern/structure formation mechanism has been well studied which is controlled by a minimization of Gibbs free energy.^{3,4} For the second case, equilibrium thermodynamic principle is no longer applicable, and one need to discuss the pattern formation from a nonequilibrium thermodynamic point of view.⁵⁻⁷ In 1952, Alan Turing suggested a possible connection between the patterns in biological systems and patterns that could form spontaneously in chemical reaction-diffusion systems.⁸ At the time, there were several important experimental facts to support the theory, for instance Bray oscillation and Belousov-Zhabotinsky reaction, and proved the existence of chemical oscillation.⁹⁻¹¹ In 1970s, based on extensive researches in this field, Pringogine et al. concluded that these chemical waves/oscillations were stable spatiotemporal structures, named as "Dissipative Structure", which are formed under conditions far away from equilibrium.¹² They concluded that a system needs to meet following conditions for emerging of the ordered dissipative structures: (i) The system is open in a state far from equilibrium with nonlinear dynamic process, and (ii) the pattern formation is a self-catalysis process with positive feedback.

Among dissipative systems observed, Turing's reaction-diffusion and Rayleigh-Bénard (R-B) convection are the two representative systems for spatial pattern formation, and they have been actively studied because of their analytical and experimental accessibility.¹³⁻²⁵ Although the appeared structures either in scales or formation process are different for diverse dissipative systems, their morphologies are similar.²⁶ For example, line patterns, square-grid arrays, zig-zag patterns etc. have been observed in both Turing and R-B systems.²⁶⁻²⁸ This unusual feature can help us to use

a “comparative study method” to identify the pattern formation mechanism in unfamiliar systems.

In this work, we found that Turing patterns can also be generated in an uphill-diffusion system without a chemical reaction process through in-situ and ex-situ observation. In oversaturated thin-film solutions of organic semiconductors, regular concentration-waves have been generated and wave-property (like wave amplitude growth and phase velocity etc.) was characterized. Various patterns with micro/nanometer scaled features have been observed, including line, square-grid, zig-zag, fence-like patterns etc., which are analogous to that found previously in Turing and R-B systems. In addition, we have fabricated and characterized field effect transistors (FETs) by using the self-assembled structures to demonstrate the potential of the formed patterns.

Pattern formation experiments

Small molecule organic semiconductor 2,7-dioctyl[1]benzothieno[3,2-b][1]benzothiophene (C8-BTBT) has been chosen for this research. Solutions with various concentrations of C8-BTBT in chlorobenzene (2~20 mg/ml) were made at ambient conditions. The mixture of C8-BTBT and polystyrene (PS, Mn=10000) with different proportion was used to prepare solutions and investigate the influence of PS addition on the pattern formation. C8-BTBT and PS are well known organic materials that can be intermixed via solution process.^{29,30}

Polydimethylsiloxane (PDMS) films with grooved lines for various line-width/separation and groove depth were chosen as cover plates. The surface grooves on PDMS plate are used for solution thickness control only. For ex-situ observation, silicon wafers with oxidized surface layer were used as substrates; while for in-situ observation, glass substrates were chosen. The substrates were cleaned with acetone and isopropanol sequentially and treated with oxygen plasma for 3 min (Gas flow rate: 9.7 sccm; Pressure: 0.5 mbar; Power: 150 W) before experiments. Meanwhile, the PDMS cover plates were treated for various time with other parameters unchanged.

Solution with controlled volume (about 3 μ l for PDMS plate with 1 cm² surface

area) was drop-casted onto the surface of the PDMS plate. Then, a substrate was gently brought into contact with the solution-wetted PDMS plate (Fig. 1a and Supplementary Fig. 1a) and dried at room temperature for 30min under an applied pressure (about 5 Mpa) to generate concentration wave (Fig. 1b). Finally, the PDMS was removed, leaving the self-assembled patterned organic materials on the substrate (Fig. 1c). The groove width and separation are identical on each PDMS plate and can be changed from 10 μm to 500 μm by using different plates. The grooves are designed to precisely control the thickness of solution film, and their depth was varying from 1.5 μm to 50 μm . For the majority of experiments the groove depth used was 1.5 μm unless otherwise stated.

Morphologies of the formed patterns

Fig. 2a-d show the patterns on SiO_2/Si substrates formed in solutions with compositions: (10 mg C8-BTBT+10 mg PS)/ml (a), 10 mg C8-BTBT/ml (b), (10 mg C8-BTBT+5 mg PS)/ml (c), and (10 mg C8-BTBT+10 mg PS)/ml (d), respectively. One can see that very regular structures were generated. Depending on the solutions used, array of lines, square-grid, zig-zag, fence-like patterns were generated. The array of lines can be observed in a wide range of C8-BTBT:PS composition ratios (from 1:0 to 1:2). The square-grid pattern is preferred to appear for solutions without PS addition. In contrast, the fence-like patterns can be observed when the solution contains sufficiently large amount of PS. The zig-zag pattern formation rarely happens and can be occasionally observed for solution with controlled composition. The single domain size of the patterns is in the scale of few hundred micrometers which can generate diffraction pattern with the most accessible LED laser beam (Fig. 3a). Small line features (150~300 nm) were obtained with non-optimized experimental condition (Fig. 3b). The line period (λ) for patterns generated with pure C8-BTBT solutions is several micrometers and it reduces to $\sim 1 \mu\text{m}$ with addition of PS around 30~50% in the solution, and it increases again slightly with further increased PS content.

Pattern formation mechanism and simulations

A proper surface property of the PDMS plate and appropriate solution layer thickness are required for pattern formation. Regular patterns are formed when the PDMS plate was treated with oxygen plasma for 2~3 min. Longer or shorter time of treatment can deteriorate the pattern formation. The measured water contact angles for the plasma-untreated and treated PDMS film are 109.96° and 10.44° , respectively, displaying dramatically different surface properties (Supplementary Fig. 2). This indicates that the interface energy is a non-negligible factor for pattern formation. We have fabricated PDMS plates with various groove depths (1.5~50 μm) and found that the patterns are formed when the groove depth is less than $\sim 7 \mu\text{m}$. The total liquid film thickness is contributed from the groove depth and a liquid layer trapped between the substrate and protruding parts of the PDMS plate surface (i.e., $a+b$ in Fig. 1a). The trapped liquid film thickness b at the initial experiment was estimated to be 400~600 nm (Supplementary Note 1). The patterns can be formed under both protruding parts (indicated by M in Fig. 1a) and groove parts (indicated by N in Fig. 1a) of the PDMS plate, and better pattern quality in the groove parts was found.

The observed patterns can be classified as Turing patterns because the formation process is diffusion-driven, although no chemical reaction exist. The experimental system satisfies the condition required for dissipative structure formation:

- (1) The system is an open system where the solvent evaporates continually, and the solution parameters P change constantly, i.e., $dP/dt \neq 0$. The parameter P can be solution concentration (C), solution viscosity (η), and diffusion coefficient (D) etc. Therefore, the system is not in an equilibrium condition, and the variation of diffusion coefficient leads to a nonlinearity of solute transport in the solutions.
- (2) The uphill-diffusion in the investigated system acts as self-catalysis for the mater transport. In Turing's theory, a self-catalysis of chemical reaction is used to amplify a perturbation and generate regular chemical waves. Here, in the investigated system, the uphill-diffusion controlled spinodal precipitation can have a similar effect. We detail the self-catalysis and concentration wave

formation for this work in Supplementary information (Supplementary Fig. 3 and Note 2).

In a given experiment, the Turing pattern generation requires a control factor X which drives the system away from equilibrium. If the system is driven not far away from its equilibrium, it will adopt equilibrium state eventually. However, if the X reaches a critical value X_c , the system will no longer adopt its equilibrium state and occupy a new state, i.e., regular Turing pattern is generated. In our experiment, the organic material and solvent form a binary spinodal system,^{31,32} and its schematic phase diagram is shown in Fig. 1d. The binodal and spinodal curves are defined by $\partial G/\partial C = 0$ and $\partial^2 G/\partial C^2 = 0$, where G and C are Gibbs' free energy and solute concentration, respectively. For a coordinate point (concentration C , temperature T) within the spinodal region, where $\partial^2 G/\partial C^2 < 0$, a homogeneous solution is unstable against fluctuations in density or concentration and separates to two phases with a well-defined size.³³ The near equilibrium spinodal structure is random (inset of Fig. 1d) since the weak coupling between different waves.³⁴ At the beginning of the experiment, the concentration of the clear solution is C_0 , which is located outside of the spinodal region. With the progressing of solvent evaporation, the solution concentration increases to C in the spinodal region. At concentration C , the non-precipitated solution is oversaturated, which is signified by undercooling ΔT , and disordered structure might form, once the solution starts precipitate under external disturbance. If the solution-oversaturation can be large enough by minimizing disturbance, the concentration can reach a critical value C^* and the precipitated structures become ordered, i.e., Turing pattern is produced. The order of structures is induced by the coupling between different waves under high undercooling.

The energy density (E) stored in the solution is mainly contributed from the oversaturation-induced undercooling (ΔT) and interface energy (σ) (detailed in Supplementary Fig. 4 and Note 3):

$$E = \beta(C - C^*)C_p + (\sigma_1 + \sigma_2)/(a + b), \quad (1)$$

Where C_p is the specific heat of the solution which is treated as a constant, $(a+b)$ is the

liquid film thickness, C' is concentration on the spinodal curve corresponding to experimental temperature, β is the slope of left branch of the spinodal curve, σ_1 and σ_2 are the interface energy density for PDMS/solution and solution/substrate interfaces, respectively. Equation (1) is schematically expressed in Fig. 3c. In our system, the control parameter is solute concentration C . Once the solution is condensed to concentration C^* , the energy of the system reaches a critical value E^* and a state transition happens (i.e., point of instability, see point A of Fig. 3c). The required moderate oxygen-plasma treatment of PDMS plate could be explained as that, higher interface energy (E_{int} , the second term of Equation (1)) is favorable for the state transition, as the E - C curve will shift to higher energy direction, and the critical energy E^* is achieved relatively easier. Meanwhile, a plasma treatment is still required to maintain a reasonable wettability of the PDMS plate with the solution. The confinement of the liquid to a very thin film is important to drive the system away from equilibrium and to stabilize the generated concentration waves, because convection can be depressed when a liquid is constrained in a small space.³⁵

The spinodal process of the system is seen from microstructures of drop-casted thin films (Supplementary Fig. 5) and can be further proved through theoretical estimation of spinodal wavelength. The spinodal process defined wavelength λ_{sn} is:³³

$$\lambda_{sn} = 2\pi \sqrt{\frac{4k}{-G''}}, \quad (2)$$

where G'' is the second derivative of the free energy of solution system with respect to composition, and k is the ‘square gradient’ parameter. By taking $k \sim 0.05-0.4$ ($\text{\AA}^2 \cdot \text{mol} \cdot \text{cm}^{-3}$) and $-G'' \sim 10^{-7}-10^{-5}$ ($\text{mol} \cdot \text{cm}^{-3}$),^{36,37} one can estimate $\lambda_{sn} \sim 0.1-3$ μm , which agrees with our experiment.

The formation of concentration waves is further supported by both simulation and in-situ observation of pattern generation in the liquid. The simulation results show that all observed patterns can be composed with harmonic waves with proper mode selections (Fig. 2e-h). A generated pattern can be described with N pairs of concentration/chemical waves:²⁶

$$C = C_0 + \sum_{i=1}^N (A_i \exp(i\mathbf{k}_i \cdot \mathbf{r}) + \bar{A}_i \exp(-i\mathbf{k}_i \cdot \mathbf{r})), \quad (3)$$

Where A_i, \bar{A}_i are the amplitudes for waves with wavevector \mathbf{k}_i and $-\mathbf{k}_i$, respectively. \mathbf{r} is the position vector. $N=1$ corresponds to the vertical line pattern (Fig. 2a) formed from a wave $\varphi_x = A_x \exp(ik_x x)$ with its wavevector points in one direction (e.g., the x -direction, for simplicity we discard the wavevector in the opposite direction hereafter which does not change the displayed simulation results) (Fig. 2e). Accordingly, $N=2$ corresponds to square-grid pattern formed via interference between two waves with orthogonal vectors (i.e., $\varphi_x + \varphi_y$) (Fig. 2f). The zig-zag structure is simulated utilizing a wave with a periodical phase swing (Fig. 2g). The fence-like pattern is formed through interference between the wave φ_y and a wave-package ($\sum_i \varphi_x^i = \sum_i A_x^i \exp(ik_x^i x)$) with vector in the x -direction (Fig. 2h). The reason why only a limited number of waves are involved in the pattern formation is that a “spatial resonance principle” is applied during the mode selection and only a finite number of waves are stable.^{26,38} A distinctive feature of waves is the interference, which occurs when waves with different wavevectors encounter, as clearly seen from the humps at cross points of lines (insets of Fig. 2b,d). For the simulated patterns in Fig. 2e-h, only high concentration parts are displayed for comparison with experiments, because the material precipitation from the solution happens around the peaks of the waves (see later discussion).

Our experiments show that the line pattern can coexist with any one from other three types of patterns in Fig. 2, however, any two from those three cannot stably appear at the same sample. This excludes the possibility of energy degeneracy of the line pattern with other three patterns. Otherwise, those three patterns (or any two of them) should have a chance to coexist. We propose that the line pattern is the preferred state to be adopted once the critical point (i.e., the first instability point, indicated with A in Fig. 3c) is reached, and all other patterns are formed via instability of the line pattern, i.e., newly selected state by the system after line pattern generation (the secondary instability point, indicated with B in Fig. 3c). The speculation is consistent with previous observations in Turing and R-B systems. The square-grid patterns observed here are similar to the cross-line (or cross-roll) patterns generated from the unstable line pattern in the R-B system.^{27,28} Such instability is distinguished from some

underdeveloped square-grid patterns where one can see that the square-grid patterns are developed through side-branching of lines (Fig. 3d). In Fig. 3d, the vertical lines are the primary lines (formed from the first instability), which become unstable and side-branches develop from them (the secondary instability). The misaligned sharp features (indicated by white arrows) are the indication of the side growth. In a maturely developed square-grid pattern, the branches from neighbored lines merge completely and form a new set of lines (as shown in Fig. 2b). The collective alignment between the branches results from a predefined modulated diffusion field in response to the newly adopted state. The branching mechanism is required by the energy minimization, since a favorable solute gradient is provided near the primary lines for uphill-diffusion. Germinated line instability is frequently seen as periodically modulated feature on the primary lines (inset of Fig. 3d). Whether these modulated features have chance to grow up depends on the mode selection for adapting to the local environment. We have observed a mode selection process during the square-grid pattern formation: one mode with proper wavelength will become dominant eventually, while, other non-competitive modes will decay (Supplementary Fig. 6). If the initial instability with short wavelength can grow up, and the competition from other long wavelength-mode can be avoided, a fence-like pattern may form. We have also observed that the line instability and branching occur immediately after the primary line emerging. The next neighbored primary line emerges immediately after the branching of the one emerged before it (Supplementary Fig. 7 and Note 4). The zig-zag pattern formation is well known as “zig-zag instability” and has been observed in both Turing and R-B systems. It is originated from phase instability induced by perturbation transverse to the wave vector,^{39,40} and can be modeled by $\varphi = A \exp\{i[k_y y + S(x)]\}$, where $S(x)$ is a periodic sawtooth function. The pattern evolution with increasing PS content is probably related to the modification of spinodal curve of the phase diagram, because the slope k enhances when the solute molecule-chain-length increases (red dashed line in Fig. 1d, and red curve in Fig. 3c).⁴¹ This leads an increased ΔT value, and the system can adopt a state which is inaccessible without the addition of PS. Another instability of the line

patterns we have observed is Eckhaus instability, which has also been found in Turing and R-B systems, where a fundamental wave is modulated by another wave.^{39,42} Fig. 3e shows a pattern formed with such combined wave (top panel) which can be fitted with superposition of a fundamental wave $\varphi_x = A \exp(ik_x x)$ and a modulation wave $\varphi_m = A \exp(i2k_x x/3)$ (bottom panel). This is interpreted by a local environment fluctuation (like concentration) that readjusts the wavelength. A common defect of the line pattern is ‘line-end’ dislocation (Fig. 3f, referred as dislocation hereafter). The dislocation can migrate in the array of lines to adjust the line separation, or to improve the integrity of the array by migrating to domain boundary. Fig. 3g shows an intermediate stage of the migration, where the dislocation is fused with a neighbor line that the dislocation attempts to pass through (further detailed in Fig. 4b). Besides, since our investigated system is liquid-film based, in order to confirm that the patterns are not originated from R-B convection, we have performed experiments with the sample-clamping-tool upside-down, and as a result, the same assembled patterns were obtained, which is impossible to happen for the R-B system (Supplementary Fig. 8 and Note 5).

In-situ observation of the pattern-formation

More evidences of the concentration waves were obtained through in-situ observation of pattern-formation in solution of (10 mg C8-BTBT + 20 mg PS)/ml in chlorobenzene (Supplementary Fig. 1b). Fig. 4a displays selected frames from a video which show a fast wave-generation process (see Supplementary Video I). Fig. 4b shows the pattern evolution process which reveals that a ‘line-end’ dislocation initially located between line-4 and line-5 (white arrow in Fig. 4b-I) has passed through line-5 and line-6 (Fig. 4b-(II~V)) sequentially (see Supplementary Video II). The migration of the dislocation in Fig. 4b-I starts from fusing with line-5 to form a branched-line (Fig. 4b-II). Then, the dislocation quickly replaces the bottom-half of the line-5 through chopping it off to form a new dislocation (Fig. 4b-III). The same process is repeated for the dislocation to pass the line-6 (Fig. 4b-IV, Fig. 4b-V). The concentration wave can develop-up in about 4~5 seconds, which was estimated by measurement of time dependence of brightness contrast between neighbored peak and valley in a video (Fig.

4c). By fitting the curve shown in Fig.4c we can express the relation between the concentration at wave-peak (C_{wp}) and time (t) as an error function:

$$C_{wp} = C^* + \frac{A_m}{2} \{\text{erf} [\xi(t - t')] + 1\} \quad (4)$$

where C^* and A_m are the critical concentration of the solution at the instability point and the wave amplitude, respectively. The moment at which the time start to account can be chosen arbitrarily, and t' is the time corresponding to half-development of the wave. The ξ is a constant which can be chosen as $\xi=0.56$ in our experiment. The rationality of the equation (4) can be checked with a simple discussion. Before development of the concentration wave ($t \ll t'$), from equation (4) we have $C_{wp} \rightarrow C^*$; while, after completion of the wave development ($t \gg t'$), we have $C_{wp} \rightarrow C^* + A_m$; if we take $t = t'$, then $C_{wp} = C^* + A_m/2$. This is in line with our expectation.

One can obtain phase velocity of the generated wave by doing the same measurements as in Fig.4c performed on two points (A, B) with distance δx during the pattern development (Fig. 4d). During the wave propagation, the wave development of the two points has a time delay δt , and the phase velocity:

$$v_p = \delta x / \delta t \quad (5)$$

In our experiment, $\delta x = 3\lambda$, δt is taken from Fig. 4d, and we have $v_p \sim 8.8\lambda/s$ ($\sim 12 \mu\text{m/s}$). Here, the wave propagation only occurs at the stage of wave generation. Once a wave is fully developed, it becomes stable (see Supplementary Note 2).

The condensation of the concentration waves from the solution films onto the substrates provides a useful way for ex-situ study of the pattern formation, which also offers a new material patterning method. We propose a two-step mechanism of the pattern condensation: (i) solute precipitation at the peak regions of the formed waves and (ii) patterning of residual liquid by the precipitated organic material (detailed in Supplementary Note 6).

Organic semiconductor devices with the patterned materials

The high regularity and high resolution of the generated patterns have motivated us to fabricate organic nanowire devices, like field effect transistors (FETs), to

demonstrate the potential of the patterned materials. Such electronic devices based on semiconductor wires are interesting for various applications, like brain mapping and synaptic devices with low energy consumption.⁴³⁻⁴⁵ We have first generated organic line patterns on 300-nm-thick SiO₂ films grown on highly doped silicon substrates. Then, the samples were annealed at 100°C for 10 hours in nitrogen-filled glovebox, and subsequently 50 nm gold source/drain electrodes were thermally evaporated through shadow mask to complete the FETs fabrication. Fig. 4e-f show the output and transfer curves of the fabricated device with C8-BTBT wires and device image. The derived charge-carrier mobility is 0.76 cm²·V⁻¹·S⁻¹ which is a reasonable result for organic FETs with SiO₂ dielectrics since the SiO₂ can induce traps of mobile charges. The charge mobility was calculated using the expression in Ref. 46 with a small modification, that is, deduction of the interline space area by replacing channel width W with $\alpha W\lambda^{-1}$, to suit the nature of our devices. Where, α is the width of the semiconductor lines and W is the channel width of the device. We have also fabricated device with C8-BTBT+PS (1:1) wires, and similar performance was obtained (Supplementary Fig. 12). During the device fabrication, thermal annealing induces a phase separation of the wires and a double layer structure is formed, where the PS layer is located between the C8-BTBT layer and the substrate. Fig. 4g displays cross-sectional transmission electron microscopy (TEM) image of a fabricated C8-BTBT+PS line (top panel) and energy dispersive X-ray spectroscopy (EDX) analysis to show the phase separation (bottom panel). As the C8-BTBT molecules contain sulfur element (Supplementary Fig. 12), the sulfur distribution analysis shows clear double-layer structure induced by the phase separation. The electron diffraction patterns show the polycrystalline structure of the C8-BTBT in both the phase-separated wires and the pure C8-BTBT wires (Fig. 4h).

Conclusions

In summary, we have observed Turing pattern formation in geometrically confined oversaturated solution films of organic semiconductors without chemical reaction process. By stably concentrating the confined solution films, highly ordered patterns including line, square-grid, fence-like, and zig-zag etc. patterns can be generated. These

pattern morphologies and pattern instability are typical features of pattern-formation in the well-known dissipative systems, like Turing's reaction-diffusion and Rayleigh-Bénard convection systems. The investigated system satisfies the required condition for being a dissipative system, particularly the uphill-diffusion can form a self-catalysis process. To observe ordered structures, the system needs to be driven far away from equilibrium without precipitation before the instability point (phase transition point) is reached. In a thin solution film sandwiched between two solid surfaces, the convection can be suppressed which is beneficial to achieve a stable nonequilibrium state and generate/stabilize the concentration waves. The patterns observed here can be classified as Turing patterns since the wave formation is diffusion-driven. The experimental system we used is so simple that such patterns could be generated in natural conditions without artificial involvement. We are not clear whether it has connection with certain patterns formed in nature (like in biosystem) at present, which requires more investigation. With further development, the generated patterns might have potential applications as nanomaterials.

References

1. D.V. Gruznev, A.V. Matetskiy, L.V. Bondarenko, O.A. Utas, A.V. Zotov, A.A. Saranin, J.P. Chou, C.M. Wei, M.Y. Lai, Y.L. Wang, Stepwise self-assembly of C60 mediated by atomic scale moiré magnifiers. *Nat. Commun.* **4**, 1679 (2013).
2. O. Usher, L. Christensen, The universe through the eyes of Hubble. Springer International Publishing, ISBN: 978-3-319-02722-7 (2014).
3. Joan Torrent-Burgues, The Gibbs energy and the driving force at crystallization from solution. *J. Crystal Growth* **140**, 107-114 (1994).
4. N. B. Bowden, A. Terfort, J. D. Carbeck, and G. M. Whitesides. Self-assembly of mesoscale objects into ordered two-dimensional arrays. *Science* **276**, 233-235 (1997).
5. J. E. Pearson, Complex patterns in a simple system. *Science* **261**, 189-192 (1993).
6. P. Gray, S. K. Scott, Chemical oscillations and instabilities: nonlinear chemical kinetics. *Chem. Eng. Sci.* **47**, 1333 (1992).
7. K. J. Lee, W. D. McCormick, Q. Ouyang, H. L. Swinney, Pattern formation by interacting chemical fronts. *Science* **261**, 192 (1993).
8. A. M. Turing, The chemical basis of morphogenesis. *Phil. Trans. R. Soc. London B* **237**, 37-72 (1952).

9. W. C. Bray, A periodic reaction in homogeneous solution and its reaction to catalysis. *J. Am. Chem. Soc.* **43**, 1262–1267 (1921).
10. B. P. Belousov, A oscillating reaction and its mechanism. *Radiats. Med.* **145** (1959).
11. A. M. Zhabotinsky, Periodic liquid phase reactions. *Dokl. Akad. Nauk. USSR* **157**, 392 (1964).
12. G. Nicolis and I. Pringogine, Self-organization in non-equilibrium systems. *John Wiley & Sons, Inc.* (1977).
13. J. Reinitz, Turing centenary: Pattern formation. *Nature* **482**, 464 (2012).
14. A. Gierer, H. Meinhardt, A theory of biological pattern formation. *Kybernetik* **12**, 30-39 (1972).
15. A. Cabelli, G. de. Vahl Davis, A numerical study of the Bénard cell. *J. Fluid Mechanics* **45**, 805-829 (1971).
16. E. Bodenschatz, W. Pesch, G. Ahlers, Recent development in Rayleigh- Bénard convection. *Annu Rev Fluid Mech* **32**, 709-778 (2000).
17. H. Nakao and A. S. Mikhailov, Turing patterns in network-organized activator-inhibitor systems. *Nat. Phys.* **6**, 544-550 (2010).
18. J. Halatek, E. Frey, Rethinking pattern formation in reaction-diffusion systems. *Nat. Phys.* **14**, 507-514 (2018).
19. Y. Fuseya, H. Katsuno, K. Behnia, A. Kapitulnik, Nanoscale Turing patterns in a bismuth monolayer. *Nat. Phys.* **10**, 1031-1036 (2021).
20. P. De Kepper, V. Castets, E. Dulos, Turing-type chemical patterns in the chlorite-iodide-malonic acid reaction. *J. Boissonade, Physica D.* **49**, 161 (1991).
21. Q. Ouyang and H. L. Swinney, Transition from a uniform state to hexagonal and striped Turing patterns. *Nature* **352**, 610 (1991).
22. I. Lengyel and I. R. Epstein, Modeling of Turing structures in the chlorite-iodide-malonic acid-starch reaction system. *Science* **251**, 650 (1991).
23. K.J. Lee, W. D. McCormick, Q. Quyang, H. L. Swinney, Pattern formation by interacting chemical fronts. *Science* **261**, 192 (1993).
24. F. Copie, M. Conforti, A. Kudlinski, A. Mussot, S. Trillo, Competing Turing and Faraday instabilities in longitudinally modulated passive resonators. *Phys. Rev. Lett.* **116**, 143901 (2016).
25. D. K. Gaskins, E. E. Pruc, I. R. Epstein, M. Dolnik, Multifold increases in Turing pattern wavelength in the chlorine dioxide-iodine-malonic acid reaction-diffusion system. *Phys. Rev. Lett.* **117**, 056001 (2016).
26. Q. Ouyang, Pattern formation in reaction-diffusion systems. *Shanghai scientific and technological education publishing house, Shanghai* (2000).
27. F. H. Busse, J. A. Whitehead, Instabilities of convection rolls in a high Prandtl number fluid. *J. Fluid Mech.* **47**, 305 (1971).
28. F. H. Busse, Non-linear properties of thermal convection. *Rep. Prog. Phys.* **41**,

- 1929-1967 (1978).
29. Y. Yuan, G. Giri, A. L. Ayzner, A. P. Zoombelt, S. C. B. Mannsfeld, J. Chen, D. Nordlund, M. F. Toney, J. Huang, Z. Bao, Ultra-high mobility transparent organic thin film transistors grown by an off-centrespun-coating method. *Nat. Commun.* **5**, 3005 (2014).
 30. T. Shen, H. Zhou, J. Xin, Q. Fan, Z. Yang, J. Wang, T. Mei, X. Wang, N. Wang, J. Li, Controllable microstructure of polymer-small molecule blend thin films for high-performance organic field-effect transistors. *Appl. Surf. Sci.* **498**, 143822 (2019).
 31. G. M. Fanta, P. Jarka, U. Szeluga, T. Tánski, and J. Y. Kim, Phase diagrams of n-type low band gap naphthalenediimide-bithiophene copolymer solutions and blends. *Polymers* **11**, 1474 (2019).
 32. S. Li, J. Li, Y. Chun, P. Shrestha, X. Chan, M. Pivnenk, D. Chu, Variety of ordered patterns in donor-acceptor polymer semiconductor films crystallized from solution. *ACS Appl. Mater. Interfaces* **13**, 19055-19063 (2021).
 33. J. W. Cahn, Phase separation by spinodal decomposition in isotropic system. *J. Chem. Phys.* **42**, 93-99 (1965).
 34. The random spinodal structure can be viewed as an earlier stage of phase transition where the waves with different vectors are weakly coupled. At this stage, only the wavelength is certain and wavevectors can point in any directions. When the system is driven far from the equilibrium, the coupling between the waves is strong, regular patterns can be generated. For simplicity, we describe the earlier stage of the transition as equilibrium, and only the point where regular pattern occurs is regarded as instability point.
 35. Q. Li, X. Pu, Measuring the diffusion coefficient of liquids by capillary imaging method: equivalent refractive index method. *Acta Phys. Sin.* **62**, 094206 (2013).
 36. J.T. Cabral, J.S. Higgins, Spinodal nanostructures in polymer blends: on the validity of the Cahn-Hilliard length scale prediction. *Prog. Polym. Sci.* **81**, 1-21 (2018).
 37. S. Li, Y. Chun, J. Li, P. Shrestha, H. Ahn, D. Ahn, J. Sohn, W. Hong, B. Kim, Y. Deng, D. Chu, Two-dimensional arrays self-assembled via interference of concentration modulation waves in drying solutions. *Mater. Horiz.* **6**, 507 (2019).
 38. P. Manneville, Dissipative structure and weak turbulence. *New York: Academic Press* (1990).
 39. V. Dufiet and J. Boissonate, Conventional and unconventional Turing patterns. *J. Chem. Phys.* **96**, 664 (1992).
 40. B. Peña, C. Pérez-García, A. Sanz-Anchelergues, D. G. Míguez, A. P. Muñozuri, Transverse instabilities in chemical Turing patterns of stripes. *Phys. Rev. E* **68**,

056206 (2003).

41. H. Zhang, J. Zhang, Y. Yang, Spinodal decomposition in asymmetric polymer mixtures. *Macromol. Theory Simul.* **4**, 1001-1013 (1995).
42. M. Lowe and J. P. Gollub, Pattern selection near the onset of convection: The Eckhaus instability. *Phys. Rev. Lett.* **55**, 2575-2578 (1985).
43. Q. Qing, S. K. Pal, B. Tian, X. Duan, B. P. Timko, T. Cohen-Karni, V. N. Murthy, C. M. Lieber, Nanowire transistor arrays for mapping neural circuits in acute brain slices. *Proc. Natl. Acad. Sci.* **107**, 1882-1887 (2010).
44. W. Xu, S. Min, H. Hwang, T. Lee, Organic core-sheath nanowire artificial synapses with femto joule energy consumption. *Sci. Adv.* **2**, e1501326 (2016).
45. S. Li, Y. T. Chun, S. Zhao, H. Ahn, D. Ahn, J. I. Sohn, Y. Xu, P. Shrestha, M. Pivnenko, D. Chu, High-resolution patterning of solution-processable materials via externally engineered pinning of capillary bridges. *Nat. Commun.* **9**, 393 (2018).
46. F. Garnier, G. Horowitz, X. Peng & D. Fichou, An all-organic “soft” thin film transistor with very high carrier mobility. *Adv. Mater.* **2**, 592-594 (1990).

Methods

The structured PDMS plates were duplicated by pouring commercial silicone elastomer (Sylgard®184, Dow Corning), supplied as a two-part liquid component kit, with a 10:1 mix ratio onto a pre-defined structured masters and annealed at 70°C for 1 h. For duplication of PDMS plates with groove-depth of 1.5 µm the masters were fabricated with optical lithography, while for the groove depth of 25~50 µm the masters were made with mechanically cut grid of scotch tapes that firmly appressed on silicon wafers. For the groove depth with 2~20 µm, the masters were made with mechanically carving PMMA films spin-coated on silicon wafers. For the masters with groove depth of 2~50 µm the line width and separation were ~500 µm. Ex-situ experiments were performed on a homemade stainless-steel clamping tool, which provided a proper substrate/PDMS-plate alignment, under the application of controlled pressure

(Supplementary Fig. 1a). For in-situ microscopic observation, transmissive mode was used, and samples were made with glass as substrates for light transmission and clamped in a transparent plastic box with open holes for solvent extraction. The pressure for stabilizing PDMS on the glass substrate is applied by controlling the thickness of PDMS clamped in the box (Supplementary Fig. 1b).

The AFM and SEM analyses were performed on Bruker Dimension Icon and FlexSEM 1000 II. TEM experiments were done with JEM-3200FS and FEI Talos200X systems. For FET fabrication, C8-BTBT and C8-BTBT+PS wires were generated on 300-nm-thick thermo-oxidized SiO₂ layer carried on highly doped silicon substrates use solution of 10 mg/ml C8-BTBT and (10 mg C8-BTBT+10 mg PS)/ml in chlorobenzene. After thermal annealing for 10 hours at 100°C, Au electrodes were thermally deposited through shadow masks. The fabricated devices were measured with Keithley 4200A-SC semiconductor analyzer under nitrogen atmosphere.

Data availability

Source data are provided with this paper. The data that support the findings of this study are available from the corresponding authors upon reasonable request.

Competing interests

The authors declare no competing interests.

Figures:

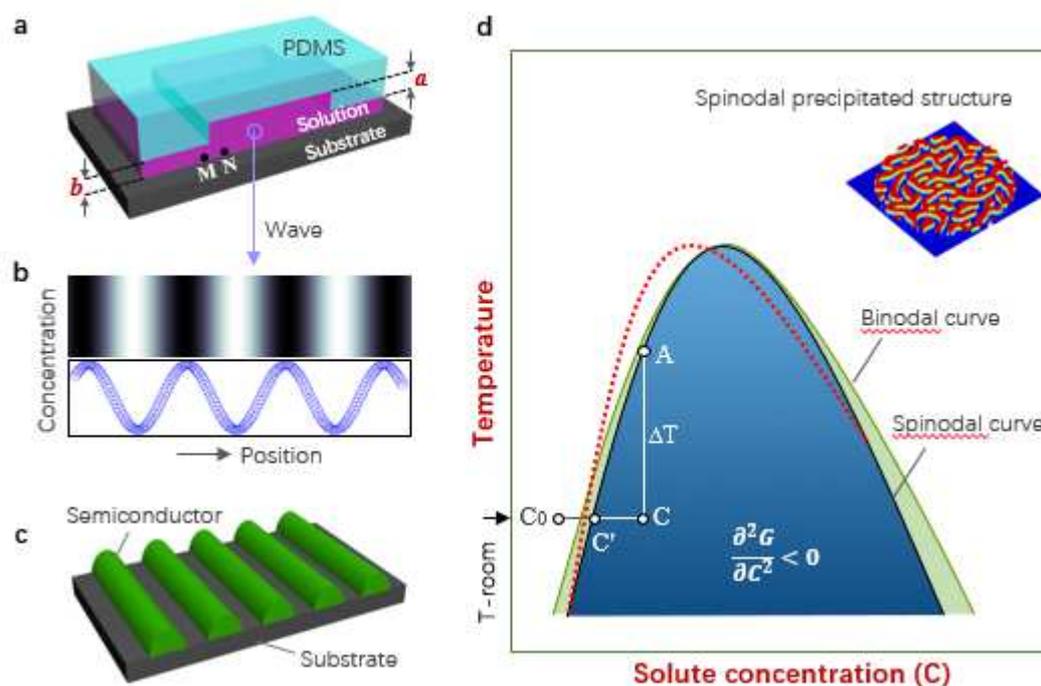


Fig. 1 | Schematic illustration of proposed concentration-wave formation process.

a, Solution film sandwiched between a PDMS plate and the substrate. **b**, Proposed concentration-wave generated in solution where the color contrast in the top panel corresponds to the solute distribution in the liquid, which is further illustrated by a wavy curve (bottom panel). **c**, Schematic illustration of a line-pattern formed on the substrate through condensation of the generated waves. **d**, Schematic illustration of molecule-solvent binary phase diagram where spinodal and binodal curves are displayed. The inset shows a schematic spinodal structure formed under equilibrium.

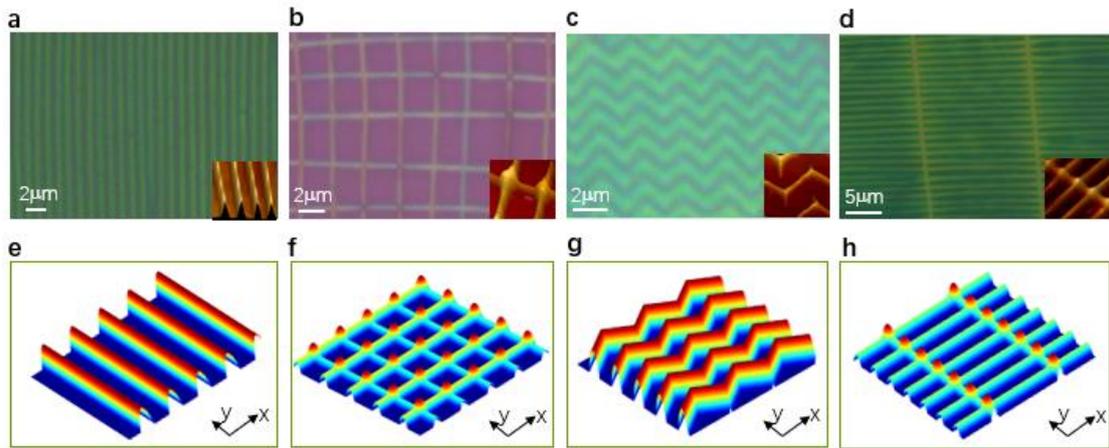


Fig. 2 | Optical/AFM images (insets) of the self-assembled microstructures and the results of simulations with harmonic waves. **a**, Line pattern formed with solution (10 mg C8-BTBT+10 mg PS)/ml. **b**, Square-grid pattern formed with solution 10 mg C8-BTBT/ml. **c**, Zig-zag pattern formed with solution (10 mg C8-BTBT+5 mg PS)/ml. **d**, Fence-like pattern formed with solution (10 mg C8-BTBT+10 mg PS)/ml. **(e)** Single harmonic wave propagates in the x-direction. **f**, Two harmonic waves propagate in two orthogonal directions. **g**, Single harmonic wave propagates in the y-direction with a periodic phase swing. **h**, Single harmonic wave propagating in the y-direction superimposes with a wave package propagates in the x-direction. For the simulated patterns only high concentration parts are displayed, as the precipitation happens around the peaks of the waves.

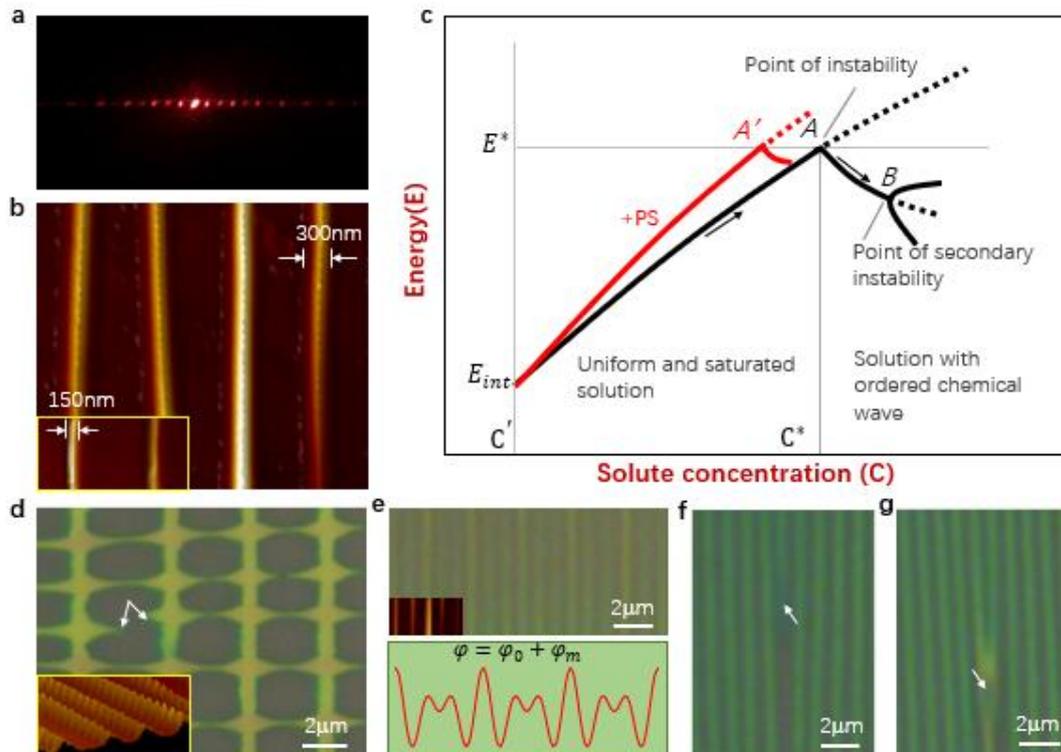


Fig. 3 | Structure analysis and proposed mechanism for pattern formation.

a, Optical diffraction taken from a line pattern with LED diode laser. **b**, AFM images of the obtained line patterns which show line features of 300 nm and 150 nm. **c**, Proposed pattern formation mechanism which shows schematic energy-concentration relation of oversaturated solution film. E_{int} is the interface energy and E^* is the critical energy density for phase transition to happen. A and B are the first and secondary instability points, and the red colored curve corresponds to the case when PS is added into the solution. **d**, Microstructure of an underdeveloped square-grid pattern where a branching from vertical primary lines is seen. White colored arrows indicate misalignment of the branches. The AFM image (see inset) shows a modulated feature with unstable lines. **e**, Modulated microstructure (top panel) which can be fitted with superposition of two waves (bottom panel). **f**, Microstructure which shows ‘line-end’ dislocation emerged in an array. **g**, Microstructure which shows a dislocation fused with neighbor line before passing through it (detailed in Fig. 4b and Supplementary video II).

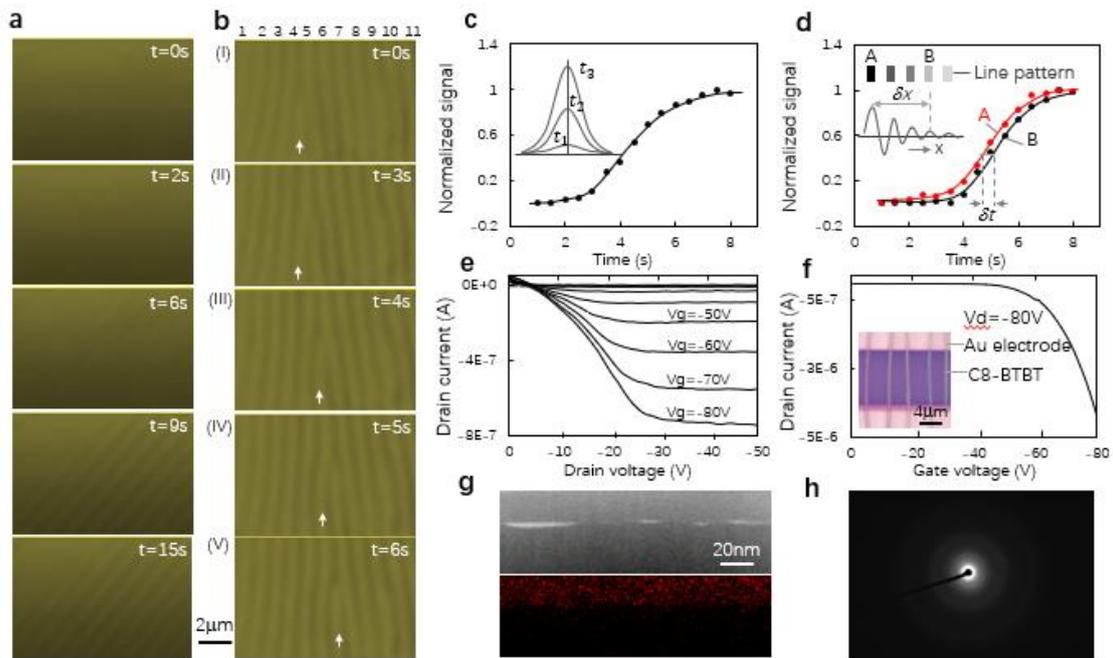


Fig. 4 | In-situ observations of the pattern formation processes and film/device characterizations. **a,b**, Selected frames in videos taken from in-situ observation, where (a) shows a fast wave-generation and (b) is pattern evolution process which shows that a line-end dislocation has sequentially passed through two neighbor lines on the right. The dislocation located between line-4 and line-5 (I) is fused with line-5 (II). Then, it replaces the low part of line-5, and the part being replaced is isolated from the line-5 and become a new dislocation (III). The newly generated dislocation has passed through line-6 with the same process (IV,V). **c**, Normalized brightness-contrast between neighbored peak and valley measured at various times. **d**, Similar measurement as in (c) on two lines with separation 3λ (indicated with A, B) in order to find phase delay time δt . The inset illustrates the wave propagation scenario during the wave generation. **e,f**, Output and transfer curves taken from a FET device made with C8-BTBT wires. Inset is an image of the device with C8-BTBT wires. **g**, The cross-sectional TEM image of a sample of C8-BTBT + PS wires (top panel) and the EDX analysis of sulfur element (bottom panel). **h**, The electron diffraction pattern taken from the C8-BTBT layer.

Supplementary Files

This is a list of supplementary files associated with this preprint. Click to download.

- [SupportingInformationNCdbr.pdf](#)
- [Supplementaryvideol.mp4](#)
- [Supplementaryvideoll.mp4](#)