

# Hall effect in gated single-wall carbon nanotube film

Yohei Yomogida (✉ [yomogida@tmu.ac.jp](mailto:yomogida@tmu.ac.jp))

Tokyo Metropolitan University

**Kanako Horiuchi**

Tokyo Metropolitan University

**Ryotaro Okada**

Tokyo Metropolitan University

**Hideki Kawai**

Tokyo Metropolitan University

**Yota Ichinose**

Tokyo Metropolitan University

**Hiroyuki Nishidome**

Tokyo Metropolitan University

**Kan Ueji**

Tokyo Metropolitan University

**Natsumi Komatsu**

Rice University

**Weilu Gao**

University of Utah

**Junichiro Kono**

Rice University

**Kazuhiro Yanagi**

Tokyo Metropolitan University

---

## Research Article

**Keywords:** carrier, hall, effect, densities, types, films

**Posted Date:** September 3rd, 2021

**DOI:** <https://doi.org/10.21203/rs.3.rs-849926/v1>

**License:**  This work is licensed under a Creative Commons Attribution 4.0 International License.

[Read Full License](#)

---

**Version of Record:** A version of this preprint was published at Scientific Reports on January 7th, 2022.  
See the published version at <https://doi.org/10.1038/s41598-021-03911-7>.

# Abstract

The presence of hopping carriers and grain boundaries can sometimes lead to anomalous carrier types and density overestimation in Hall-effect measurements. Previous Hall-effect studies on carbon nanotube films reported unreasonably large carrier densities without independent assessments of the carrier types and densities. Here, we have systematically investigated the validity of Hall-effect results for a series of metallic, semiconducting, and metal-semiconductor-mixed single-wall carbon nanotube films. With carrier densities controlled through applied gate voltages, we were able to observe the Hall effect both in the  $n$ - and  $p$ -type regions, detecting opposite signs in the Hall coefficient. By comparing the obtained carrier types and densities against values derived from simultaneous field-effect-transistor measurements, we found that, while the Hall carrier types were always correct, the Hall carrier densities were overestimated by up to four orders of magnitude. This significant overestimation indicates that thin films of one-dimensional SWCNTs are quite different from conventional hopping transport systems.

## Introduction

Hall-effect measurements<sup>1</sup> are one of the most direct and accurate methods for determining the type and density of charge carriers in crystalline materials. However, it is known that Hall measurements can lead to erroneous carrier types and densities when localized (or hopping) carriers, as opposed to delocalized (or band) carriers, dominantly contribute to the charge transport<sup>2-13</sup>. For example, in amorphous materials<sup>9-12</sup> and organic polymers<sup>13</sup>, Hall measurements sometimes show a “sign anomaly,” i.e., a carrier type opposite to that determined through field-effect transistor (FET) and/or thermoelectric measurements. In addition, in some materials, even when the carrier type can be correctly determined, the carrier density cannot be properly evaluated by Hall measurements<sup>2-8</sup>. In systems where localized and delocalized carriers coexist, the Hall carrier density is overestimated because hopping carriers tend to reduce the Hall voltage<sup>3</sup>. Furthermore, in a system with grain boundaries, density overestimation occurs due to a reduction of the Hall electric field at grain boundaries<sup>7</sup>. Therefore, in disordered or heterogeneous materials, it is essential to compare Hall carrier types and density with those obtained by other methods such as FET measurements.

Macroscopic assemblies of single-wall carbon nanotubes (SWCNTs), such as FETs and transparent conducting films<sup>14-16</sup>, provide an intriguing system in which to study the Hall effect. Since the Hall effect is a two-dimensional phenomenon, how the effect should appear in a film composed of one-dimensional nanoobjects is not self-evident. SWCNT films are also complicated systems due to the presence of various types of SWCNTs – metallic and semiconducting nanotubes with different diameters, chiral angles, and band gaps. Many intertube junctions also exist, making hopping conduction a crucial element in carrier transport<sup>17-20</sup>. Thus, in interpreting the results of Hall measurements of SWCNT films, one must carefully assess the influence of hopping carriers and junctions on the Hall effect. Although Hall-effect studies on SWCNT films have been conducted<sup>21,22</sup>, these issues have never been addressed. The unreasonably large carrier density estimation reported there ( $\sim 10^{22} \text{ cm}^{-3}$ ) indicates the importance

of considering these issues. Furthermore, in all SWCNT films used in previous Hall studies, metallic and semiconducting nanotubes coexisted. Since carrier transport can be strongly affected by the type of SWCNTs<sup>23,24</sup>, it is important to examine the effect of the electronic structure of SWCNTs on the Hall effect.

In this study, we evaluated the validity of the Hall effect in SWCNT films by systematically comparing obtained results of Hall effect with those of simultaneous FET measurements. To investigate the effect of the electronic structure of SWCNTs on the Hall effect, various SWCNT films with different electronic types, such as metallic, semiconducting, and their mixture, were prepared. The carrier types and carrier density were systematically controlled by in the FET structure using ionic liquid, and then Hall-effect data were evaluated. We found that Hall-determined carrier types are always consistent with FET-determined carrier types, but Hall-determined carrier densities were significantly larger than FET-determined densities by three to four orders of magnitude. These results were found to be common to all SWCNT films studied, regardless of the electronic types and the sizes of SWCNT films.

## Results

We fabricated FET devices with standard Hall bar configuration using SWCNT thin films, as shown in Fig. 1a and Fig. 1b (see also Supplementary Fig. 1). We prepared thin films of metallic (Metal), semiconducting (Semi), and unsorted SWCNTs (Mix) by filtration through polycarbonate membranes, as described in previous studies<sup>25</sup>. In addition, for unsorted SWCNTs, less-packed films (L-Mix) were prepared by filtration through nitrocellulose membranes in order to assess the effect of morphology. Each prepared SWCNT film was transferred onto a SiO<sub>2</sub>/Si substrate with Au/Ti electrodes. Figure 1c shows a typical atomic-force microscope image of one of the films. As seen in the image, the SWCNTs are randomly oriented.

Hall measurements were performed in vacuum. During the measurements, the carrier type and density were controlled by varying the gate voltage. Figure 2a shows typical transfer characteristics of the Metal device, plotted as a function of reference voltage,  $V_R$  (see Supplementary Fig. 2 for other devices). All devices exhibit ambipolar transistor behavior (Supplementary Fig. 2), which shows  $p$ -type and  $n$ -type current amplification with the charge neutral point (CNP) in the middle. The on/off ratio reached  $\sim 10$  for the Metal, Mix, and L-Mix samples and  $\sim 10^4$  for the Semi samples, indicating that carrier doping is effectively achieved by the ionic-liquid gating method. We measured the Hall voltage across the channel under a constant current while sweeping the magnetic field. To avoid temporal changes in the carrier density during the measurements, all measurements were performed at temperatures below the freezing point of the ionic liquid ( $\sim 256$  K)<sup>26</sup>.

Figure 2b (2c) shows the measured Hall voltage of the Metal sample in the  $n$ -type ( $p$ -type) region as a function of magnetic field (see Supplementary Fig. 3 for other data plotted as a function of time). The sign of the Hall voltage changes when the direction of the magnetic field is reversed, and the sign depends on the carrier type. When holes (electrons) are the dominant carriers, the Hall voltage is positive

(negative) at positive magnetic fields, as expected. This behavior was observed in relatively high-density regions, and was similarly observed in different temperature regions above 50 K (Supplementary Fig. 4). However, in low-density regions (Fig. 2d) and low-temperature regions below 30 K (Supplementary Fig. 4), it was difficult to observe this ideal reversal response of the Hall voltage. In these regions, the transverse Hall voltage could not be precisely evaluated because of the large longitudinal resistance and the presence of magnetoresistance, as discussed below. Therefore, in this study, we only discuss the Hall voltage in the high carrier density region.

Figure 3 shows Hall-measurement results for the Semi, Mix, and L-Mix samples in the high-density  $n$ -type region; see Supplementary Fig. 5 for results in the  $p$ -type region. In all cases, the sign of the Hall voltage was consistent with that obtained in FET measurements. This “sign consistency” was universally confirmed in all SWCNT films studied, regardless of their electronic types. However, it was more difficult to obtain the ideal reversal response of the Hall voltage in the Mix and L-Mix samples than in the Metal and Semi samples. The ideal responses in the Mix and L-Mix samples were only observed at temperatures above 150 K (see Supplementary Fig. 6). This emphasizes the important fact that the coexistence of different electronic types can negatively affect Hall-effect results in SWCNT films.

Next, we investigated whether the carrier density could be properly evaluated by Hall measurements. The Hall carrier density  $n_{\text{Hall}}$  was derived from the corrected Hall voltage  $V_{\text{Hall}}$  using

$$n_{\text{Hall}} = \frac{1}{e} \times \frac{I \cdot B}{V_{\text{Hall}}}$$

where  $I$  is the source-drain current and  $B$  is the magnetic field applied perpendicular to the film. The estimated Hall carrier density was compared to the FET carrier density  $n_{\text{FET}}$ , which was derived from the measured specific capacitance  $c_{\text{FET}}$  using

$$n_{\text{FET}} = \frac{1}{e} \int c_{\text{FET}} dV$$

(see Supplementary Fig. 7). Table 1 shows a summary of the Hall and FET carrier densities of all the samples obtained in the  $n$ -type region (see Supplementary Table 1 for results in the  $p$ -type region). We found that in all devices the Hall carrier density ( $\sim 10^{17} \text{ cm}^{-2}$ ) was more than two orders of magnitude higher than the FET carrier density ( $\sim 10^{15} \text{ cm}^{-2}$ ). Assuming that the 59 ~ 93 nm thick SWCNT films are uniformly doped, the obtained  $n_{\text{Hall}}$  values correspond to  $\sim 10^{22} \text{ cm}^{-3}$ , reproducing the extremely large carrier density reported in the previous study<sup>22</sup>. On the other hand, the obtained  $n_{\text{FET}}$  values correspond to  $\sim 10^{20} \text{ cm}^{-3}$ , which is comparable to those typically attained by electrolyte gating<sup>27</sup>. These results indicate that the  $n_{\text{Hall}}$  values are overestimated. The values of the so-called coherence factor  $a$ , which is defined as the ratio of the two densities,  $n_{\text{FET}}/n_{\text{Hall}}$ , are also summarized in Table 1. The obtained values of  $a$  ( $\sim 10^{-3}$ ) are much smaller than those reported for organic semiconductors and polymer materials ( $> 0.1$ )<sup>2-6,28</sup>. Figure 4 shows the temperature dependence of  $a$  (see also Supplementary Fig. 8),

exhibiting a slight monotonic increase with decreasing temperature, similar to organic semiconductors<sup>4</sup>, although the absolute values are very different. To check the reproducibility of these extremely small  $a$  values, we performed additional measurements on devices with different channel sizes, and the results were fully reproduced (see Supplementary Fig. 9). These results suggest that the small  $a$  values are not influenced by the device structure.

Table 1  
FET carrier density ( $n_{\text{FET}}$ ), Hall carrier density ( $n_{\text{Hall}}$ ), coherence factor ( $a$ ), FET carrier mobility ( $\mu_{\text{FET}}$ ) of the various SWCNT thin film devices studied in this work. Data taken at 200 K in the  $n$ -type region are shown.

| Samples | $n_{\text{FET}} (\text{cm}^{-2})$ | $n_{\text{Hall}} (\text{cm}^{-2})$ | $a$                  | $\mu_{\text{FET}} (\text{cm}^2 \text{V}^{-1} \text{s}^{-1})$ |
|---------|-----------------------------------|------------------------------------|----------------------|--|
| Metal   | $2.4 \times 10^{15}$              | $7.0 \times 10^{17}$               | $3.4 \times 10^{-3}$ | 52   |
| Semi    | $7.8 \times 10^{14}$              | $3.1 \times 10^{17}$               | $2.5 \times 10^{-3}$ | 62   |
| Mix     | $7.9 \times 10^{14}$              | $1.1 \times 10^{18}$               | $7.1 \times 10^{-4}$ | $1.0 \times 10^2$  |
| L-Mix   | $3.5 \times 10^{14}$              | $7.5 \times 10^{17}$               | $4.7 \times 10^{-4}$ | 75   |

## Discussion

We reiterate that we did not observe any Hall-coefficient sign anomaly in any of our films, although such a phenomenon is often observed in hopping-conduction-dominated systems<sup>17-20</sup>. The observed sign consistency indicates the existence of delocalized carriers that respond to the Lorentz force, as opposed to the hopping carriers whose existence is clear from the temperature dependence of resistance (see Supplementary Fig. 10)<sup>17,20,24</sup>. The existence of weakly localized carriers was confirmed by the appearance of negative magnetoresistance in any conditions (Supplementary Fig. 11), as described as a signature of weak localization<sup>23,24</sup>. Therefore, we assume that such weakly localized carriers contributed the Hall voltage to some degree and ensured the sign consistency in the Hall effect in our SWCNT films, although the hopping conduction mechanism reduced  $a$ .

Finally, we discuss the possible origins of the very small  $a$  values we observed. First, the Hall voltage can be compensated by the hopping carriers moving in the direction opposite to the Lorentz force<sup>3</sup>. In organic semiconductors, this contribution is usually related to the reduction of carrier mobility. Table 1 shows the FET carrier mobility values for the SWCNT film devices, calculated using the formula

$$\mu = \frac{L}{W C_{\text{FET}}} \times \frac{dG}{dV_{\text{R}}}$$

where  $L$  is the channel length,  $W$  is the channel width, and  $\sigma$  is the sheet conductance. We note that our SWCNT films exhibited relatively high carrier mobilities ( $> 52 \text{ cm}^2 \text{ V}^{-1} \text{ s}^{-1}$ ), comparable to those reported for similar gated SWCNT films ( $\sim 59 \text{ cm}^2 \text{ V}^{-1} \text{ s}^{-1}$ )<sup>29,30</sup>. However, these mobilities are much smaller than that expected for a single SWCNT rope ( $\sim 79,000 \text{ cm}^2 \text{ V}^{-1} \text{ s}^{-1}$ )<sup>31</sup>, indicating the contribution of hopping conduction that can reduce  $a$ . The effect of grain boundaries, reported in organic composite systems, can be also the origin to reduce the Hall voltage<sup>7</sup>. SWCNT films have many interfaces, both tube-tube and bundle-bundle junctions (see AFM images in Fig. 1 and Fig. 3), which can be thought of as grain boundaries in the context of carrier localization. However, the above two contributions are generally used to explain  $a$  of at most 0.1, and this extremely small  $a$  we obtained for the SWCNT films suggests that there may be other factors in addition to the above two. We assume the following effect of dimensionality. If the conduction path (e.g., a SWCNT bundle) of the delocalized carriers is closer to one-dimensional, their contribution to the two-dimensional Hall effect should be smaller, resulting in smaller  $a$ .

Finally, we highlight two trends of  $a$  values observed in sample dependence: (i)  $a$  (Metal)  $>$   $a$  (Semi)  $>$   $a$  (Mix), and (ii)  $a$  (Mix)  $>$   $a$  (L-Mix). These trends suggest that the aforementioned factors that affect the Hall voltage, such as weak localization, hopping conduction, grain boundaries, depend on the sample. The Metal sample exhibited the largest  $a$ , which is reasonable because it shows weak localization even without carrier doping<sup>23,24</sup>. The Mix samples containing metallic SWCNTs showing a smaller  $a$  than the Semi sample indicates that  $a$  in the high-density region is affected not only by the electronic structure but also by sample inhomogeneity. Regarding (ii), it is noteworthy that there is no significant difference in  $a$  between the Mix and L-Mix samples, despite the significant difference in film morphology (see Fig. 3). This suggests that the morphology of films does not considerably affect the Hall effect.

In conclusion, we evaluated the validity of the Hall effect in SWCNT films with various electronic types and morphologies. We observed clear Hall voltages in all samples in high carrier density regions and confirmed that the carrier types were consistent between the Hall effect and FET measurements. However, the Hall carrier densities were significantly overestimated, compared to the FET densities, resulting in extremely small values of  $a$  ( $< 10^{-3}$ ). The values of  $a$  for SWCNT films are the smallest among the values reported for all the materials, indicating that thin films of one-dimensional SWCNTs are quite different from conventional hopping transport systems. This study suggests that, even though Hall measurements are a general method to evaluate carrier types and carrier densities, a careful evaluation is crucial for correct estimation of the carrier density when interpreting Hall-effect results for SWCNT films.

## Methods

### Preparation of metallic SWCNT films.

Metallic and semiconducting SWCNTs were separated from ArcSO SWCNTs (1.4 nm in diameter, Meijo Nano Carbon Co.) by density gradient ultracentrifugation<sup>23</sup>. After separation, the SWCNT dispersion was treated by ultrafiltration (Amicon Ultra-15 with Ultracel-100 membrane, Merck Millipore) to remove density gradient medium and disperse the SWCNTs in an aqueous solution of 0.3 % sodium deoxycholate (DOC).

The dispersion was sonicated with a tip sonicator (20 % in power, Sonifier 250D, Branson) for 30 min and ultracentrifuged for 1 h at 36000 rpm using a swing bucket rotor (P40ST, Hitachi Koki). The top 80 % of the supernatant was collected and diluted with pure water to a surfactant concentration of 0.01 % DOC. Random oriented films were prepared by filtration through polycarbonate or nitrocellulose membranes (0.2  $\mu\text{m}$  pore size, Merck Millipore).

### **Device fabrication.**

The obtained SWCNT film was transferred onto a  $\text{SiO}_2/\text{Si}$  substrate with Au/Ti electrodes by removing the membrane using chloroform and acetone. The film was annealed at 200 °C for 2 h in a vacuum to remove residual organic solvent. Ionic liquid N,N,N-trimethyl-N-propylammonium bis(trifluoromethanesulfonyl)-imide (TMPA-TFSI, Kanto Chemical Co., Inc.) was dropped onto the SWCNT device and held on the device by putting the cover glass on top.

### **FET measurements.**

Electrical measurements were performed in vacuum inside the physical properties measurement system (PPMS, Quantum Design Co.). A source meter (2636A, Keithley) was used to apply the gate voltage and drain current to the device. To evaluate the actual voltage applied to the device, the reference voltage  $V_R$  was measured with a digital multimeter (2000, Keithley). The four-terminal conductivity was measured with a digital multimeter (2000, Keithley) to exclude the effect of contact resistance. The capacitance of the device at different reference voltages was measured with an impedance analyzer (611ES, ALS Co. Ltd.). The carrier density was estimated from the measured capacitance and applied reference voltage.

### **Magnetoresistance and Hall effect measurements**

To avoid temporal changes in carrier density during the measurements, Magnetoresistance and Hall effect measurements were performed at temperatures below the freezing point of the ionic liquid ( $\sim 256$  K), below which the carrier density is fixed without the gate voltage. The gate voltage was first applied to the device, and the device was subsequently cooled down to a temperature below the freezing point with the gate voltage applied. For magnetoresistance measurements, the four-terminal longitudinal resistance was measured under a constant current while sweeping the magnetic field between 9 T and -9 T. For Hall effect measurements, the transverse Hall voltage was measured using nanovoltmeter (181, Keithley). The offset voltage at zero field was reduced by a potentiometer. To accurately calculate the Hall carrier density, we used the Hall voltage corrected by conventional method,  $R_H = \frac{V_H}{IB}$ , where  $V$  is the raw data of Hall voltage and  $B$  is the magnetic field.

## **Declarations**

## **Acknowledgments**


This study was partially supported by JST CREST (Grant Numbers JPMJCR17I5) and JSPS KAKENHI (Grant Numbers JP20H02573, JP19K15392, JP18H01816, JP17H01069, JP17H06124, and JP19J21142). N.K., W.G., and J.K. were supported by the Department of Energy Basic Energy Sciences through grant no. DEFG02-06ER46308 (optical spectroscopy characterization experiments) and the Robert A. Welch Foundation through grant no. C-1509 (sample preparation).

## References

1. Hall, E. H. On a New Action of the Magnet on Electric Currents. *Am. J. Math*, **2**, 287–292 (1879).
2. Uemura, T. *et al.* Temperature dependence of the Hall effect in pentacene field-effect transistors: Possibility of charge decoherence induced by molecular fluctuations. *Phys. Rev. B*, **85**, 035313 (2012).
3. Yi, H. T., Gartstein, N. & Podzorov, V. Charge carrier coherence and Hall effect in organic semiconductors. *Sci. Rep*, **6**, 23650 (2016).
4. Kang, K. *et al.* 2D coherent charge transport in highly ordered conducting polymers doped by solid state diffusion. *Nat. Mater*, **15**, 896–902 (2016).
5. Sakai, K. *et al.* The emergence of charge coherence in soft molecular organic semiconductors via the suppression of thermal fluctuations. *NPG Asia Mater*, **8**, e252 (2016).
6. Fukami, T. *et al.* Correlation between thermal fluctuation effects and phase coherence factor in carrier transport of single-crystal organic semiconductors. *Appl. Phys. Lett*, **106**, 143302 (2015).
7. Choi, H. H. *et al.* Hall Effect in Polycrystalline Organic Semiconductors: The Effect of Grain Boundaries. *Adv. Funct. Mater*, **30**, 1903617 (2020).
8. Kamiya, T., Nomura, K. & Hosono, H. Origin of definite Hall voltage and positive slope in mobility-donor density relation in disordered oxide semiconductors. *Appl. Phys. Lett*, **96**, 262105 (2010).
9. Lecomber, P. G., Jones, D. I. & Spear, W. E. Hall-Effect and Impurity Conduction in Substitutionally Doped Amorphous Silicon. *Philos. Mag*, **35**, 1173–1187 (1977).
10. Grunewald, M., Thomas, P. & Wurtz, D. The sign anomaly of the Hall effect in amorphous tetrahedrally bonded semiconductors: a chemical-bond orbital approach. *J. Phys. C*, **14**, 4083–4093 (1981).
11. Yoffa, E. J. & Adler, D. Hall-thermopower sign anomaly in chalcogenide glasses. *Phys. Rev. B*, **15**, 2311–2315 (1977).
12. Jaime, M. *et al.* Hall-Effect Sign Anomaly and Small-Polaron Conduction in  $(\text{La}_{1-x}\text{Gd}_x)_0.67\text{Ca}_{0.33}\text{MnO}_3$ . *Phys. Rev. Lett*, **78**, 951–954 (1997).
13. Gilani, T. H., Masui, T., Logvenov, G. Y. & Ishiguro, T. Low-temperature Hall effect and thermoelectric power in metallic PF<sub>6</sub>-doped polypyrrole. *Synth. Met*, **78**, 327–331 (1996).
14. Rao, R. *et al.* Carbon Nanotubes and Related Nanomaterials: Critical Advances and Challenges for Synthesis toward Mainstream Commercial Applications. *ACS Nano*, **12**, 11756–11784 (2018).


15. De Volder, M. F. L., Tawfick, S. H., Baughman, R. H. & Hart, A. J. Carbon Nanotubes: Present and Future Commercial Applications., **339**, 535–539 (2013).
16. Bati, A. S. R., Yu, L. P., Batmunkh, M. & Shapter, J. G. Recent Advances in Applications of Sorted Single-Walled Carbon Nanotubes. *Adv. Funct. Mater*, **29**, 1902273 (2019).
17. Kim, G. T. *et al.* Magnetoresistance of an entangled single-wall carbon-nanotube network. *Phys. Rev. B*, **58**, 16064–16069 (1998).
18. Yosida, Y. & Oguro, I. Variable range hopping conduction in bulk samples composed of single-walled carbon nanotubes. *J. Appl. Phys*, **86**, 999–1003 (1999).
19. Takano, T., Takenobu, T. & Iwasa, Y. Enhancement of Carrier Hopping by Doping in Single Walled Carbon Nanotube Films. *J. Phys. Soc. Jpn*, **77**, 124709 (2008).
20. Vavro, J., Kikkawa, J. M. & Fischer, J. E. Metal-insulator transition in doped single-wall carbon nanotubes. *Phys. Rev. B*, **71**, 155410 (2005).
21. Baumgartner, G. *et al.* Hall effect and magnetoresistance of carbon nanotube films. *Phys. Rev. B*, **55**, 6704–6707 (1997).
22. Lee, S. H. *et al.* Hall effect in carbon nanotube thin films. *Synth. Met*, **198**, 84–87 (2014).
23. Yanagi, K. *et al.* Transport Mechanisms in Metallic and Semiconducting Single-Wall Carbon Nanotube Networks. *ACS Nano*, **4**, 4027–4032 (2010).
24. Wang, X. *et al.* Magnetotransport in type-enriched single-wall carbon nanotube networks. *Phys. Rev. Mater*, **2**, 116001 (2018).
25. Ichinose, Y. *et al.* Solving the Thermoelectric Trade-Off Problem with Metallic Carbon Nanotubes. *Nano Lett*, **19**, 7370–7376 (2019).
26. Otsuka, H., Hamasaki, A., Iiyama, T. & Ozeki, S. Magnetic-Field-Induced Liquid Phase Transformation of an Ionic Liquid N,N,N-Trimethyl-N-propylammonium Bis(trifluoromethanesulfonyl)imide. *J. Phys. Chem. Lett*, **11**, 21–25 (2020).
27. Bisri, S. Z., Shimizu, S., Nakano, M. & Iwasa, Y. Endeavor of Iontronics: From Fundamentals to Applications of Ion-Controlled Electronics. *Adv. Mater*, **29**, (2017).
28. Wang, S., Ha, M. J., Manno, M., Frisbie, C. D. & Leighton, C. Hopping transport and the Hall effect near the insulator-metal transition in electrochemically gated poly(3-hexylthiophene) transistors. *Nat. Commun*, **3**, 1210 (2012).
29. Choi, Y. *et al.* Capacitively Coupled Hybrid Ion Gel and Carbon Nanotube Thin-Film Transistors for Low Voltage Flexible Logic Circuits. *Adv. Funct. Mater*, **28**, 1802610 (2018).
30. Ha, M. J. *et al.* Sub-3V Digital Circuits on Plastic from Aqueous Carbon Nanotube Inks. *ACS Nano*, **4**, 4388–4395 (2010). Printed
31. Durkop, T., Getty, S. A., Cobas, E. & Fuhrer, M. S. Extraordinary mobility in semiconducting carbon nanotubes. *Nano Lett*, **4**, 35–39 (2004).

## Figures

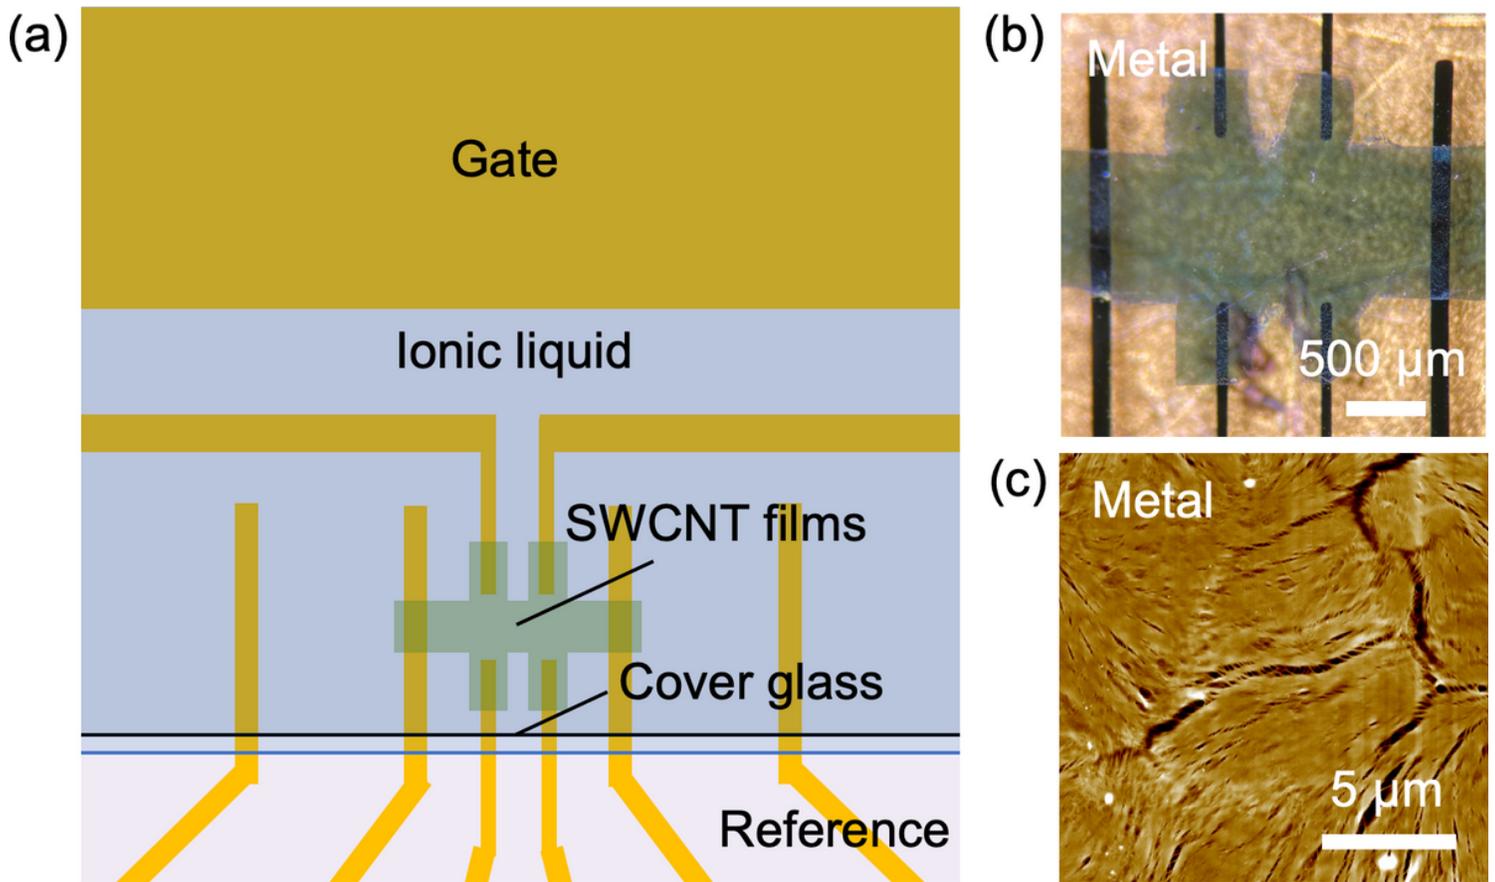


**Figure 1**

SWCNT thin film device. (a) Schematic of a SWCNT film device with standard Hall bar configuration. (b) Optical microscopy image of the SWCNT film device (Metal sample). (c) AFM (topography) image of the SWCNT film (Metal sample).

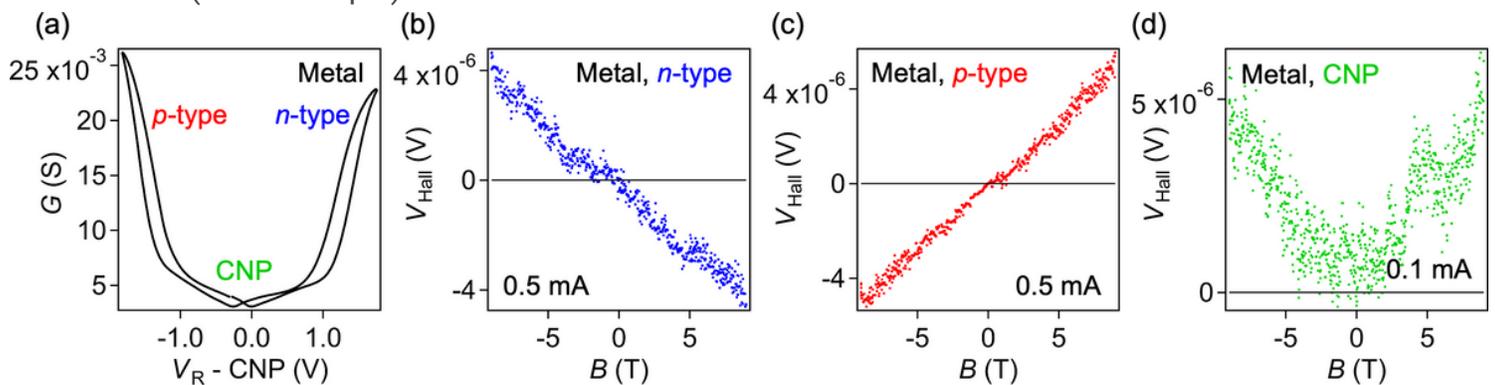

**Figure 2**

FET and Hall measurements of the SWCNT thin film devices. (a) Transfer characteristics of the Metal sample. Channel conductance ( $G$ ) is plotted as a function of reference voltage ( $V_R$ ). The data were measured at room temperature. (b-d) Hall voltage ( $V_{\text{Hall}}$ ) of the Metal sample, plotted as a function of magnetic field. Data at 200 K in the n-type region ( $V_R - \text{CNP} = 1.65$  V) (b), in the p-type region ( $V_R - \text{CNP} = -1.56$  V) (c), and at the charge neutral point (CNP) (d) are shown.

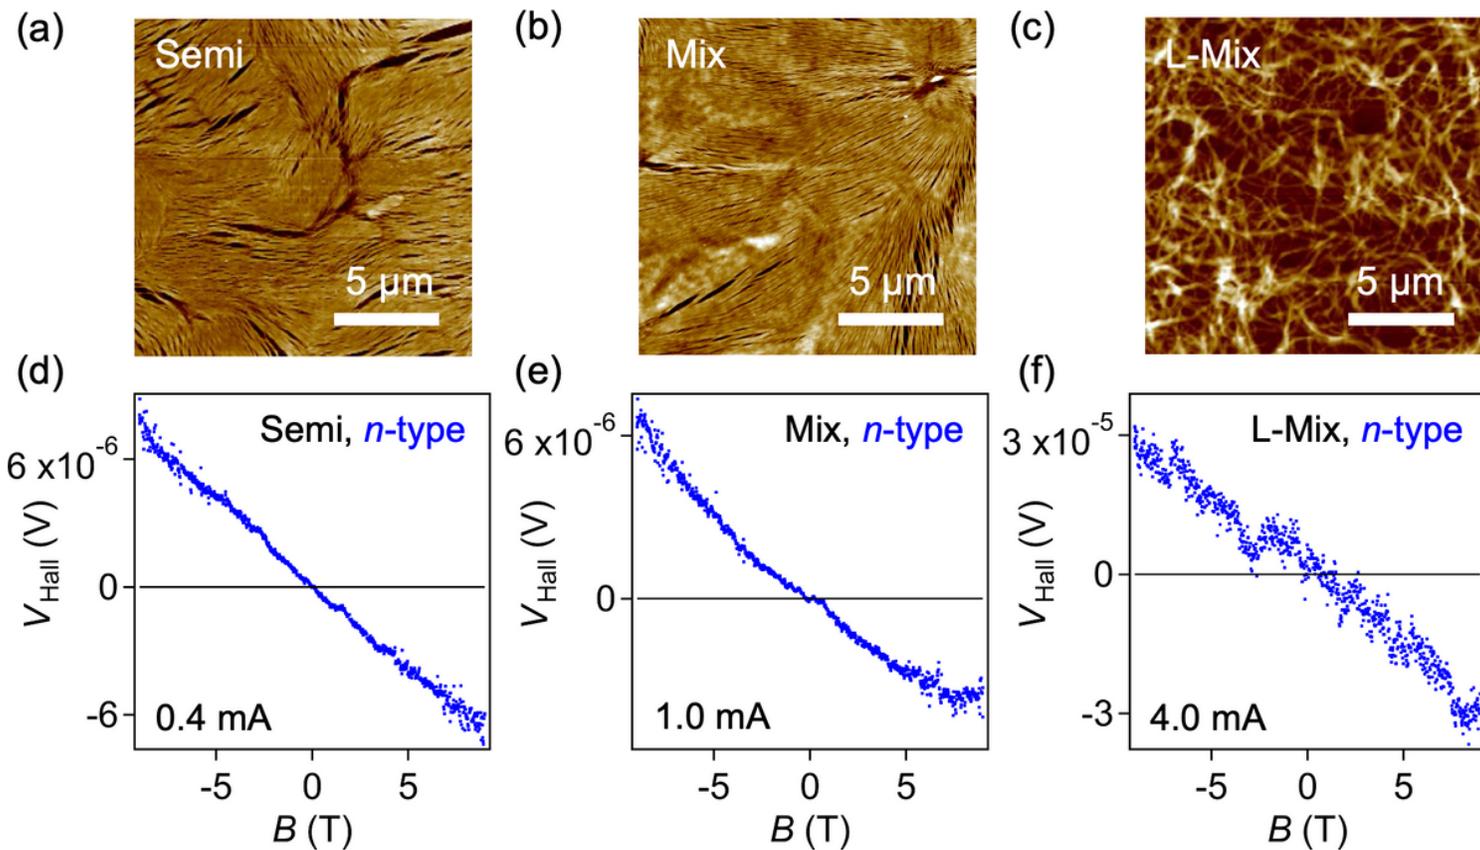

**Figure 3**

Hall measurements of various SWCNT thin film devices. (a-c) AFM images of the Semi (a), Mix (b), and L-Mix samples (c). (d-f) Hall voltage ( $V_{\text{Hall}}$ ) of the devices shown in (a-c) in the n-type region as a function of magnetic field. Data at 200 K for the Semi ( $V_R - \text{CNP} = 1.60$  V) (d), Mix ( $V_R - \text{CNP} = 1.43$  V) (e), and L-Mix samples ( $V_R - \text{CNP} = 1.39$  V) (f) are shown.

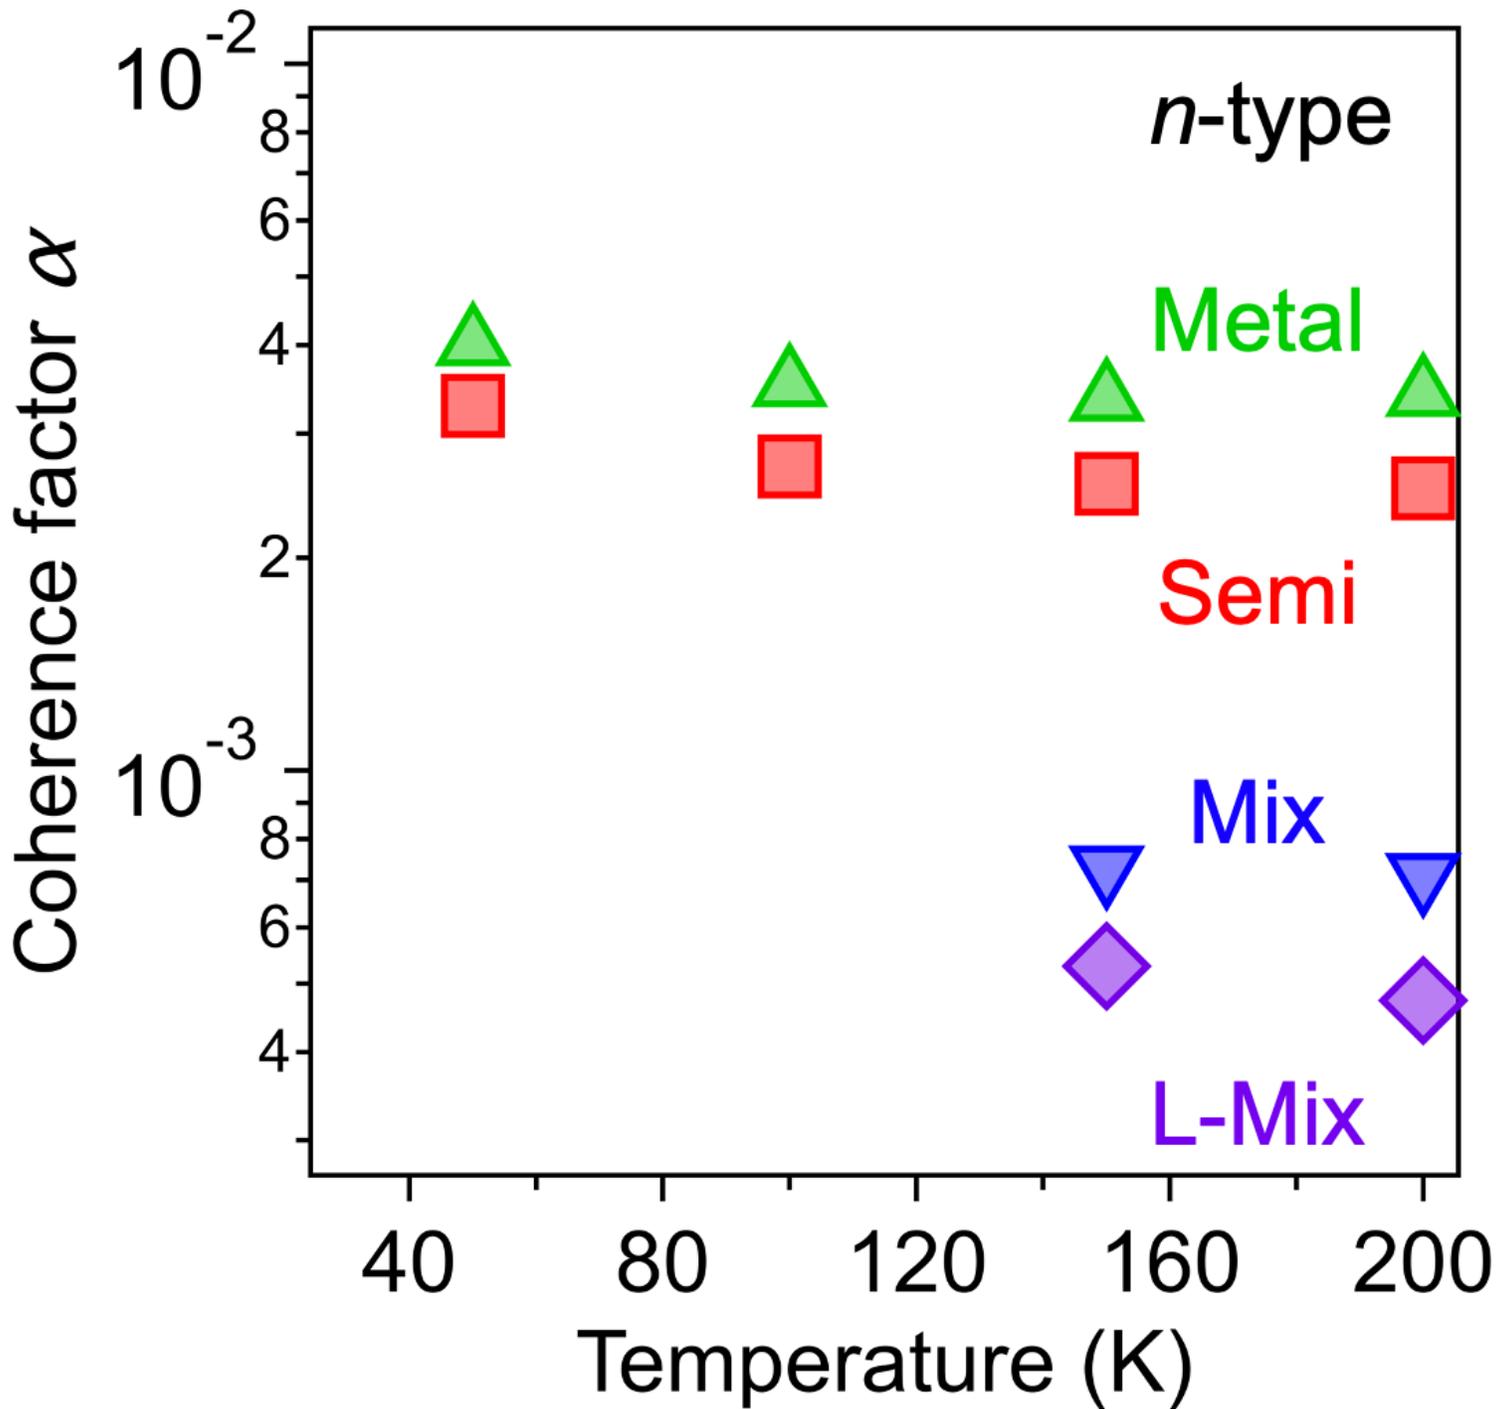


Figure 4

Coherence factor ( $\alpha$ ) of the various SWCNT thin film devices in the n-type region as a function of temperature. Data for the Metal (green), Semi (red), Mix (blue), and L-Mix samples (purple) are shown.

## Supplementary Files

This is a list of supplementary files associated with this preprint. Click to download.

- [20210819halleffectsiscirep.docx](#)